



JULIUS BLUM & CO., Inc.

B
& CO.

532-540 WEST 22nd STREET
NEW YORK, N.Y.



Digitized by



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL

www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

Mike Jackson, FAIA

CATALOG No. 5

(ISSUE 1946)

JULIUS BLUM & CO., Inc.

OFFICES and WAREHOUSE

532-540 WEST 22nd STREET

NEW YORK 11, N. Y.

Telephone: WAtkins 9-7042



Cable Address: JULBLUM, NEW YORK

Copyright, 1946

by

JULIUS BLUM & CO., Inc., N. Y.

Printed in U.S.A.

RAILINGS

TRELLAGE

MOULDINGS

SADDLES

TUBING & SHAPES

ORNAMENTS

MISCELLANEOUS

A. I. A. File No. 15

SUBJECT INDEX**RAILINGS**

	Page No.		Page No.
Balusters	18, 20, 21, 22, 24, 25	Panels	27
Bases	16, 17, 28	Pickets	29, 30, 31
Caps	28	Rosettes	104
Collars	16, 17, 19	Sockets	28
Handrails	7, 10, 11, 12	Spindles	20, 21, 22
Handrail Fittings	8, 9	Starting Posts	18, 22, 23
Loafers Rail	10	Urns—Finials	14, 15, 29
Newel Post Tubing	97	Wall Brackets	13
Ornamental Collars	19		

TREILLAGE

Brackets	35, 36, 37	Frieze	36, 40
Centers	35, 38	Panels—Continuous	35, 36, 37, 38
Corners	35, 36, 37	Panels—Railing	35, 36, 38, 39
Crestings	40		

MOULDINGS

Angles—Ornamental	58, 59, 61, 62	Modernistic	57
Cap	50, 62	Mullion	57, 59, 75
Corner	50, 53, 58, 59	Nosings	77, 78
Cornice	51, 54, 55	Partitions	69, 71
Cove	52, 73, 75	Skylight	72
Curb Bars	78	Stair Stringer	43 to 49, 63, 71
Door	76	Store Front	58, 59, 75
Facia	43, 47, 51, 61, 63, 64, 65	Trim	48, 50, 51, 52 and 57 to 66
Glass	69, 71, 73, 75, 76	Window	52, 67, 69, 71, 73, 75

SADDLES

Aluminum	80, 82	Grooved	84, 85, 86, 88, 93
Bronze	82 to 85, 91	Nosings	77, 84, 85, 89, 91
Door	80, 81, 83, 89, 91	Roof	82, 89
Elevator	84, 85, 86, 88, 89, 93	Steel	81, 88, 89, 93
Flat Fluted	85, 89, 98	Weatherstrip	82
Floor Hinge	87, 90, 91		

TUBING AND SHAPES

Angles—Bronze	98	Flats—Bronze	85, 98
Angles—Cold Drawn	99	Half Rounds—Cold Drawn	100
Angles—Square Root	99	Tees	98, 100
Angles—120°	99	Tubing—Hexagon	97
Channels	98, 100, 101, 102	Tubing—Rectangular	96, 97, 98
Channels—Aluminum	98	Tubing—Square	96, 97, 98
Channels—Bronze	98	Tubing—Twisted	97
Channels—Square Root	98, 101	Zees	100
Channels—J. & L. Stringer	102		

ORNAMENTS

Applied Designs	104, 105, 107	Pickets	29, 30, 31
Balls	108	Pressed Steel Ornaments	104
Forged Nails	109	Rivets	108
Forged Ornaments	104	Rosettes	104

MISCELLANEOUS

Butts	112	Locks	113
Cylinders	113	Machinery	115
Door Handles	113	Plastics	114
Flush Bolts	112	Soapstone	115
Hinges	112		

NUMERICAL INDEX

No.	Page	No.	Page	No.	Page	No.	Page	No.	Page	No.	Page
13071	54519	422545	442610	454989	471599
15271	54619	422645	442710	455085, 98	4720100
22471	54719	423077	44287	455185, 98	4721100
30020	55037	423177	44297	455285, 98	472267, 100
31020	55137	423277	443012	455385, 98	4730101
32020	55237	423789	443250	4553Q85, 98	4731101
32521	553104	424045	443410	455485, 98	4732101
32621	554104	424149	443511	455585, 98	4733101
32721	69671	424249	443812	455685, 98	4734101
32821	410152, 69	424349	443912	455785, 98	4735101
32922	410252	424578	444012	455885, 98	4744101
33022	410352	424678	44417	455985, 98	4750101
33122	410452	425048	444250	456084	4751101
33222	410552	425448	444611	456184	4752101
33323	410652	425548	444712	456584	4753101
33423	410752	425652	444812	456884	4754101
33523	410852	425752	444912	457688	4756101
34322	410952	425852	445071	457788	4757101
37013	411052	426151	445152, 71	457888	4758101
37113	411952	426351	445371	458084	4759101
37213	412052	426451	446071, 100	458184	4760101
37313	412152	426545	446171	458284	4762101
37413	412352	426651	447071, 100	458488, 100	4771100
37513	412552	427851	447171	458584	4772100
37613	412648	427951	447352, 69, 71	458788	4773100
37713	413048, 50	428045	447469, 71	458884	500062
37813	413148	428151	448052	459082	500162
40214	413248	428554	448250	459182	500261
40314	413348	428618	448552, 69	459382	500361
40414	413448	428718	448652	459782	500466
40515	414048	428818	448950	459882	500561
40615	414148	429018	449150	460069	501062
43215	414248	429118	449250	460169	501162
43415	414348	429218	449550	460269	501262
45215	414448	429518	449650	460369	501362
45415	415049	430043	449778	460469	502062
50040	415147	430243	449878	461045, 69	502162
50140	415247	430343	449978	461169	502262
50240	415347	430443	450081	461369	502362
50340	415449	430543	450181	461569	502462
50540	415549	430743	450381	461669	502562
50640	415647	430943	450481	461769	502662
50740	415747	431045, 53	450588, 100	4618100	502762
50940	415945	431243	450878	462069, 71	505061
51127, 36	416149	431553	450967	462169, 71	505161
51236	416249	431653	451083	462467	505261
51336	416349	431745, 53	451191	462567	505361
51436	417047	432053	451291	462667	505461
51635	417147	432253	451391	462767	506058
51727, 39	417247	432353	451793	462867	506158
51827, 39	417343, 45	433053	451893	463072	506262
51927, 39	418018	435054	452083	463172	506361
52027, 35	418118	435155	452183	463272	507058
521	27, 35, 38	418218	435255	452283	463372	507158
52235	418318	435355	452383	463472	507258
52335	418418	435454	452483	463572	507358
52435	418518	435554	452583	463999	507458
52535	418718	435655	452685	464072	510059
52635	418818	436055	452785, 91	464172	510158
52735, 36	418918	436155	452885	464372	510259
52824	419018	440012	45307	464572	510558
52925	419118	440150	45317	464699	510659
53025	419218	440250	45327	464799	510759
53125	419518	440350	453311	464899	510859
53224	419618	440450	45347	465067, 100	511164
53324	419718	441112	453511	465567, 100	511264
53424	420048	441212	45367	465667, 100	515053
53519	420148	441312	45377	470099	515153
53625	420348	441412	453811	470199	515549, 63
53727, 38	420448	441511	454089	470299	515647, 63
53827, 38	420848	441611	454189	470999	515747, 63
53927, 38	421051	442012	454289	471099	516064
54027, 38	421151	442150	454389	471199	516164
54127, 38	421251	442271	454489	471299	517063
54319	421351	442350	454589	471399	517163
54419	421451	442510	454689	471499	517263

FOREWORD

IN presenting this catalog, Julius Blum & Co., Inc. offers a line of products applicable to innumerable requirements of the Ornamental and Industrial Metal Working Trades.

"JULIUS BLUM" products have for many years been listed as standard specifications by leading Architects and Ornamental Metal Manufacturers.

Over 35 years of experience as a source of supply has enabled Julius Blum & Co., Inc. to build up an enviable record for service and cooperation, and to contribute vastly toward raising the standards of our trade and affording helpful assistance with its problems.

GENERAL INFORMATION

The various shapes and items illustrated in this catalog are shown in full size or with dimensions clearly given. Approximate weights are stated in pounds per lineal foot.

Due to technical difficulties and limitations in manufacturing, all dimensions, weights and general specifications are subject to change.

Quotations and price lists are subject to change without notice.

Orders are usually shipped within 24 hours after receipt, and all shipments are made F.O.B. New York, N. Y.

RAILINGS

THIS section illustrates the many shapes and items which Julius Blum & Co., Inc. carries in stock for use in railing construction.

These products have a wide scope of applications, not only on railings, but for balconies, grilles, window guards, fences and many varied types of ornamental construction.

In making these products available, we offer the architect and the metal fabricator a choice of designs to permit a wide application and to conform with many styles of architecture and building construction.

Many decorative and elaborate designs can be obtained by using combinations of our stock items. Our designs permit attractive work to be produced without delay at a moderate cost.

The products presented have been designed to permit economical assembly and construction. The type of material is in every case suited for the use of the product.


Julius Blum & Co., Inc. is prepared to advise you and offer suggestions as to design, construction or finishing on all forms of ornamental construction. You are welcome to submit your problem to us if assistance or additional information is required.

For additional suggestions on designs write for our Booklet "RAILINGS."

RAILINGS CONSTRUCTED WITH STOCK MATERIALS
ALUMINUM, BRONZE OR STEEL HANDRAILS WITH MATCHED FITTINGS



No. 325
Forged Spindle
No. 334 Cast Iron
Starting Post

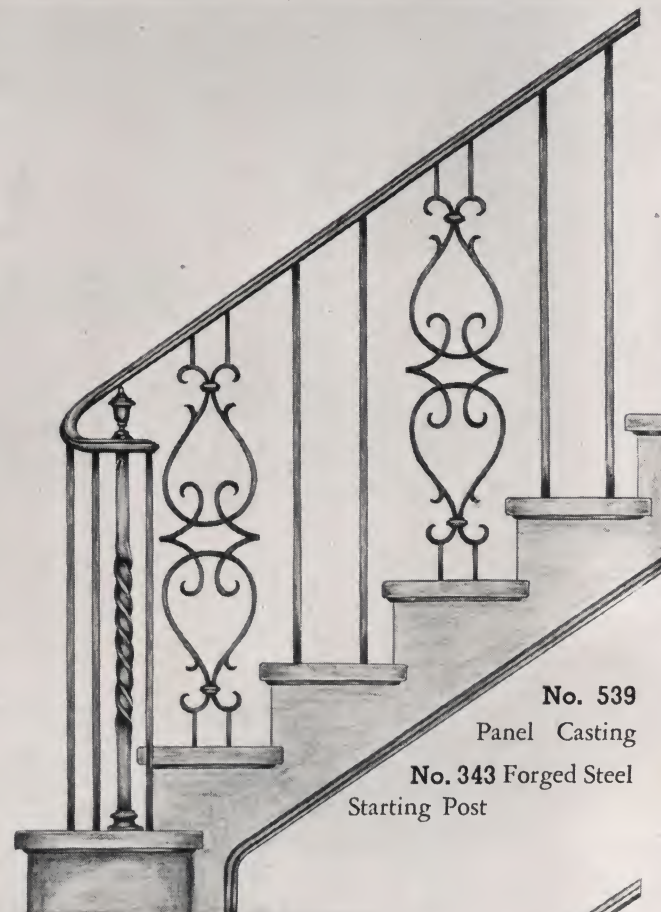

No. 539
Panel Casting
No. 343 Forged Steel
Starting Post



No. 531
Ornamental
Baluster Bar
No. 335 Cast Iron Start-
ing Post




No. 530
Ornamental
Baluster Bar
No. 331 Forged Steel
Starting Post


HANDRAILS WITH MATCHED FITTINGS

ROLLED STEEL


No. 4429

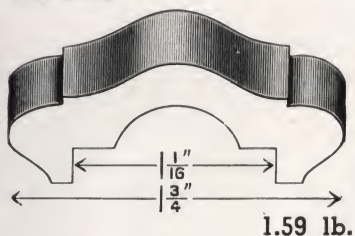

No. 4428

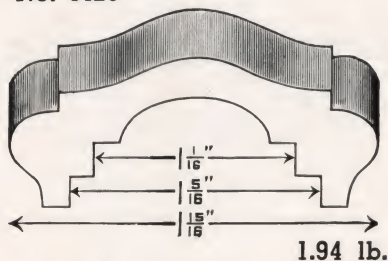


No. 4441

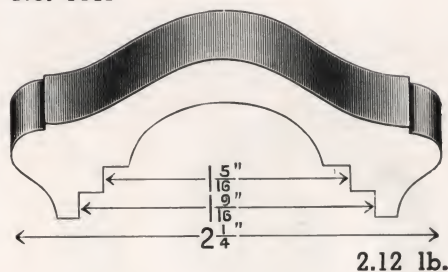


ARCHITECTURAL ALUMINUM


No. 6931

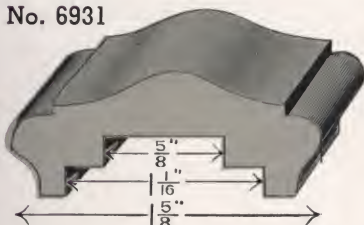

No. 6934

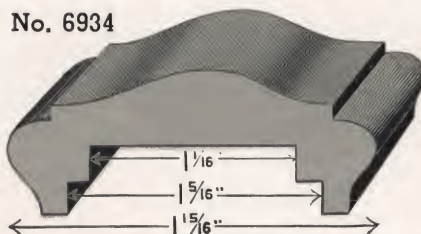


No. 6930

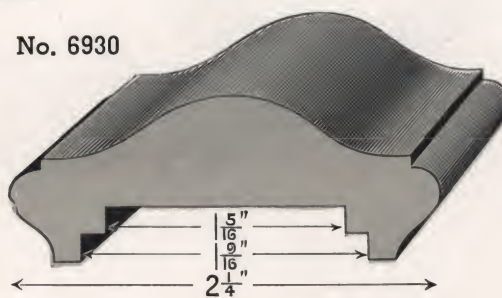


Architectural Aluminum and Bronze Handrails are annealed to facilitate bending and curving.

ARCHITECTURAL BRONZE


No. 4531

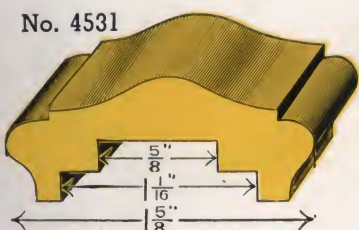

No. 4534

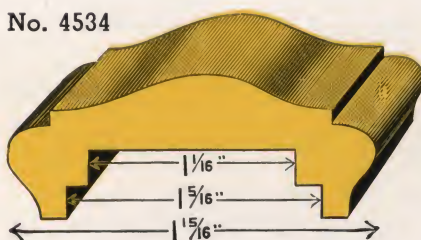


No. 4530

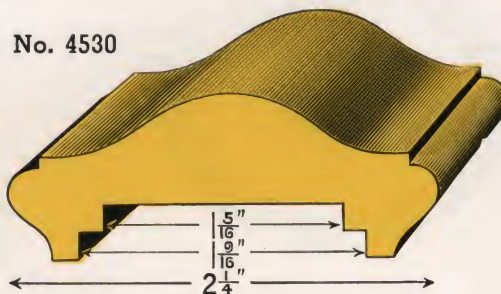


No. 4531, 4534 and 4530 Handrails illustrated above are especially suited for bending and curving.

No. 4537, 4536 and 4532 Handrails illustrated below have the same outside profile and match perfectly the corresponding handrails shown above. They are lighter in weight, therefore more economical for use in straight runs when bending and curving is not required.


No. 4537

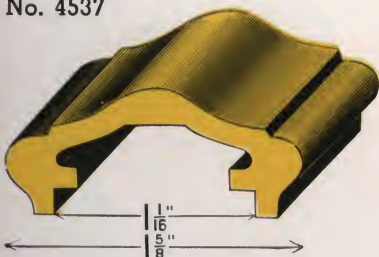

No. 4536

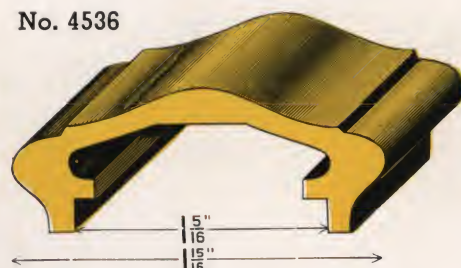

No. 4532

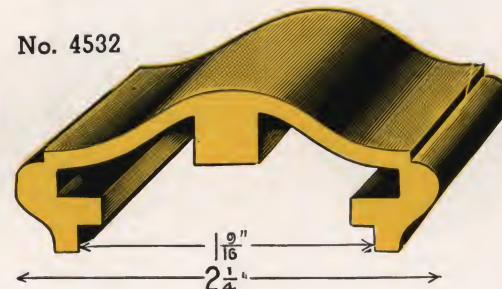

HANDRAIL FITTINGS

LATERAL SCROLLS
LAMB TONGUES
CORNER BENDS

VOLUTES
URN BASES
CENTERS

TERMINAL ENDS
CORNER PIECES
WALL BRACKETS

For complete description of fittings carried in stock see pages 8, 9 and 13

HANDRAIL FITTINGS

TO MATCH ROLLED STEEL, ARCHITECTURAL ALUMINUM AND
ARCHITECTURAL BRONZE HANDRAILS, SHOWN ON PAGE 7

MOULDED LATERAL SCROLL



Left Hand

All aluminum and bronze fittings are highly polished and match the color and profile of our handrails. Fittings for steel handrails are cast from heat treated ferrous alloy and may be bent to conform to bevel required.



Right Hand

SIZE OF SCROLL MAY BE VARIED BY CUTTING AND JOINING HANDRAIL
AT DESIRED POINT

FLAT BAR LATERAL SCROLL



To fit underside of moulded lateral scroll. Three sizes:

- 1" x $\frac{3}{8}$ " Flat
- 1 $\frac{1}{4}$ " x $\frac{3}{8}$ " Flat
- 1 $\frac{1}{2}$ " x $\frac{3}{8}$ " Flat

Made from heat treated ferrous alloy.



"JUNIOR" LATERAL SCROLL



Left Hand



Right Hand

To match No. 4429 Steel Handrail only.

FULL SIZE DETAIL
OF ANY FITTING
WILL BE SENT ON
REQUEST.

CORNER BEND



To match bronze and aluminum handrails only.

WHEN ORDERING STATE NUMBER OF HANDRAIL AND MATERIAL,
BRONZE, ALUMINUM OR STEEL


HANDRAIL FITTINGS

TO MATCH ROLLED STEEL, ARCHITECTURAL ALUMINUM AND
ARCHITECTURAL BRONZE HANDRAILS, SHOWN ON PAGE 7

STRAIGHT LAMBS TONGUE



VOLUTE

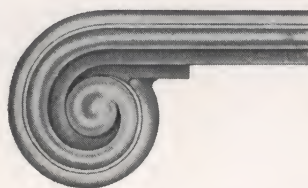


BEVEL LAMBS TONGUE




Bronze and Aluminum Fittings are highly polished and match the color and profile of our handrails.

Fittings to match our Rolled Steel Handrails are made from heat treated ferrous alloy.


END PIECE

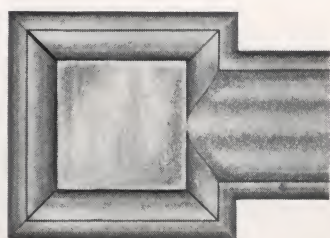

CENTER PIECE

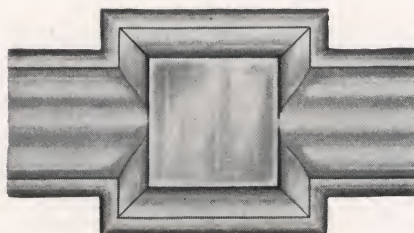

CORNER PIECE

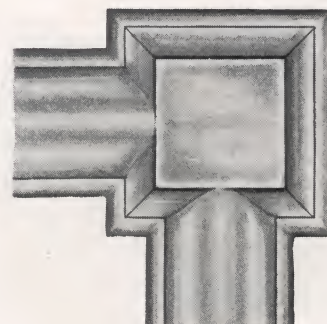


HANDRAIL BRACKET



For complete details of bracket see page 13

FULL SIZE DETAIL
OF ANY FITTING
SHOWN, WILL BE
SENT ON REQUEST

URN BASE TERMINAL

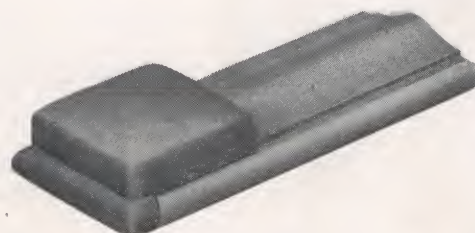


Provides flat surface for mounting urns and terminates contour of handrail which is cut square. May be held in place by screwing on urn to bolt connecting to starting post. Matches No. 4429 steel handrail only.


WHEN ORDERING STATE NUMBER OF HANDRAIL AND MATERIAL,
BRONZE, ALUMINUM OR STEEL

Rolled Steel Handrails


No. 4426

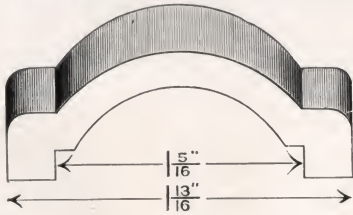



No. 4427

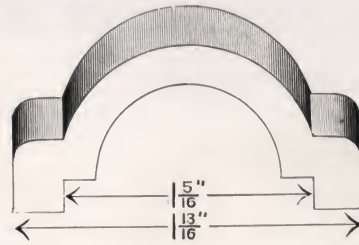


No. 4425

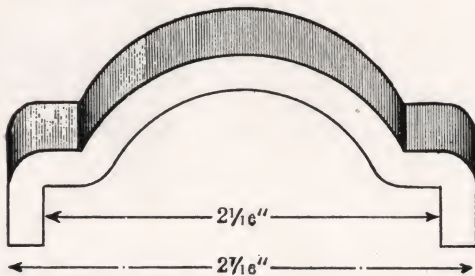

No. 4434

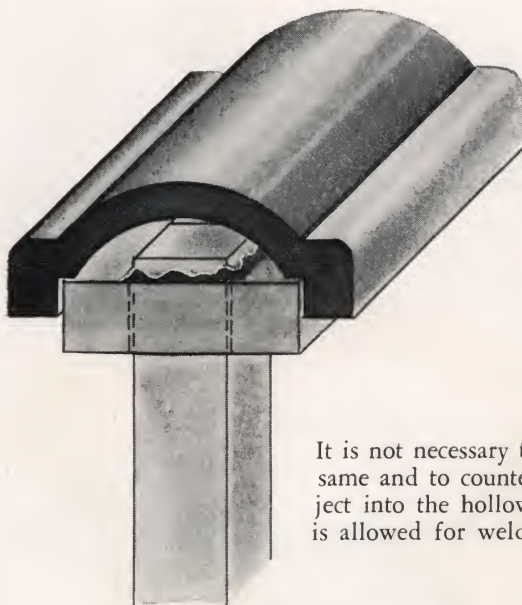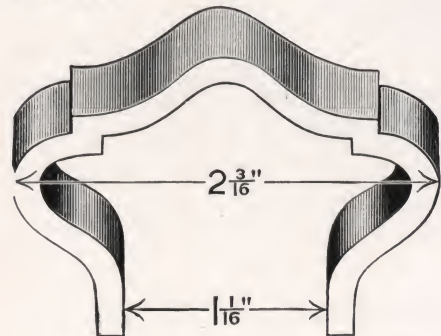


Showing method of constructing railings by using Handrails Nos. 4426 and 4427 with flats or channels on top of baluster bars.

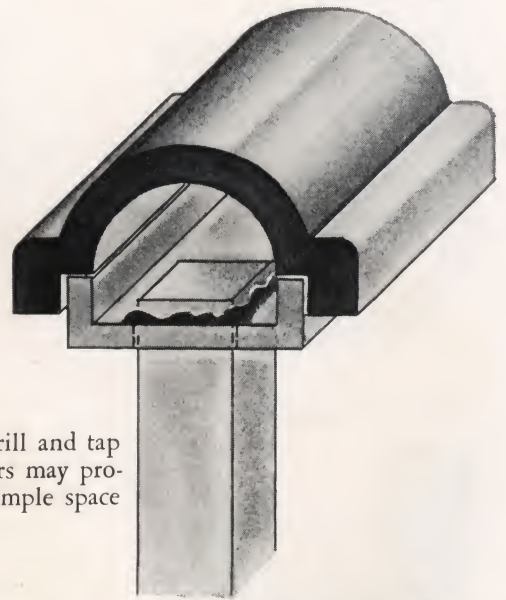

It is not necessary to cut the upright bars exact, to drill and tap same and to countersink the screws. The baluster bars may project into the hollow part underneath the handrail. Ample space is allowed for welding.

Rolled Steel "Loafers' Rail"

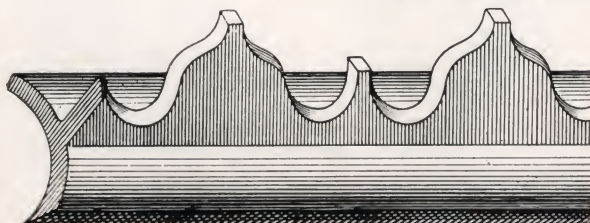


FLAT BASE
(For Flat Surface)

CURVED BASE
(For Pipe or Tubing)

WHEN ORDERING, SPECIFY FLAT OR CURVED BASE

Rolled Steel "LOAFERS' RAIL" or "LOAFERS' CUSHION" affords effective protection against lounging on fences, railings, store fronts, etc. **STRONGER AND BETTER IN APPEARANCE THAN CAST IRON.**

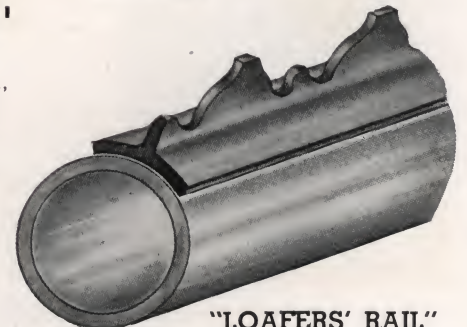


"LOAFERS' RAIL"
applied to round tubing

Architectural Bronze, Aluminum and Rolled Steel Handrails


ARCHITECTURAL BRONZE

No. 4535

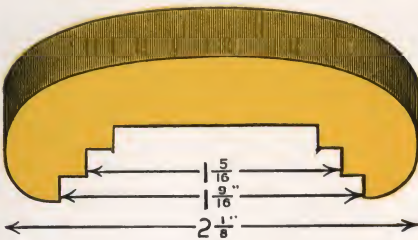

ROLLED STEEL

No. 4435

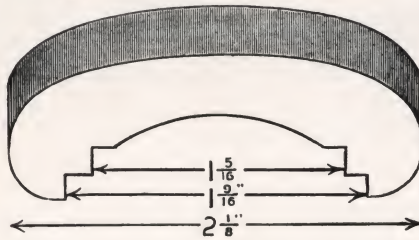


2.63 lb.

ARCHITECTURAL ALUMINUM

No. 6935




No. 4415 ROLLED STEEL

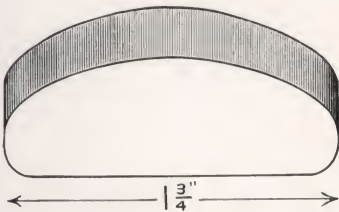


3.04 lb.

No. 4446 ROLLED STEEL

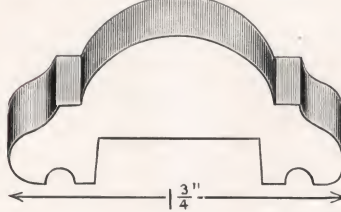

2.18 lb.


No. 4416 ROLLED STEEL

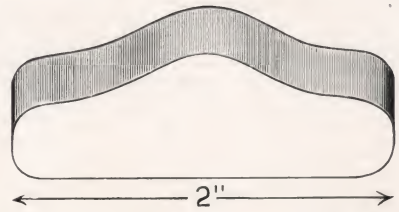

3.15 lb.


ARCHITECTURAL BRONZE

No. 4533

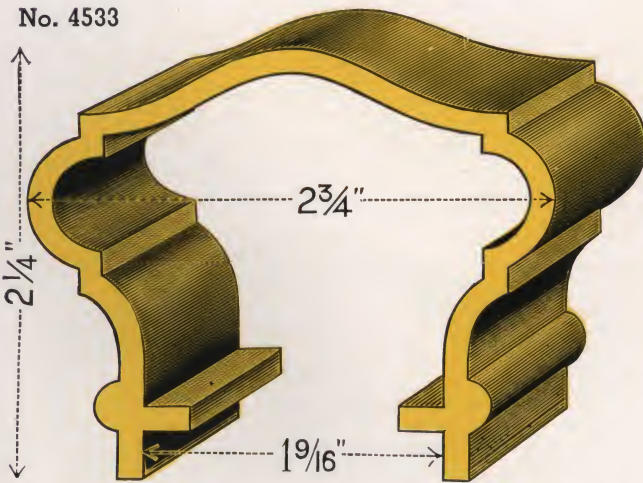

ARCHITECTURAL BRONZE

No. 4538

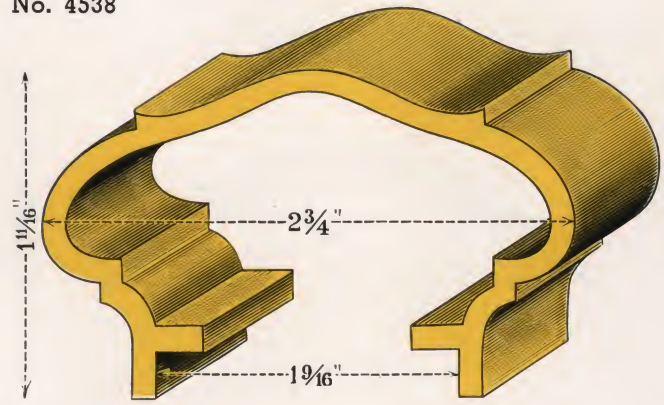

ARCHITECTURAL BRONZE AND ALUMINUM CHANNELS



to fit the underside of Handrails

1" x 1/2" x 1/8"

1 1/4" x 5/8" x 1/8"


1 1/2" x 5/8" x 1/8"





A LARGE VARIETY OF ADDITIONAL CHANNELS ARE CARRIED IN STOCK

See Pages 98, 101, 102

ROLLED STEEL HANDRAILS


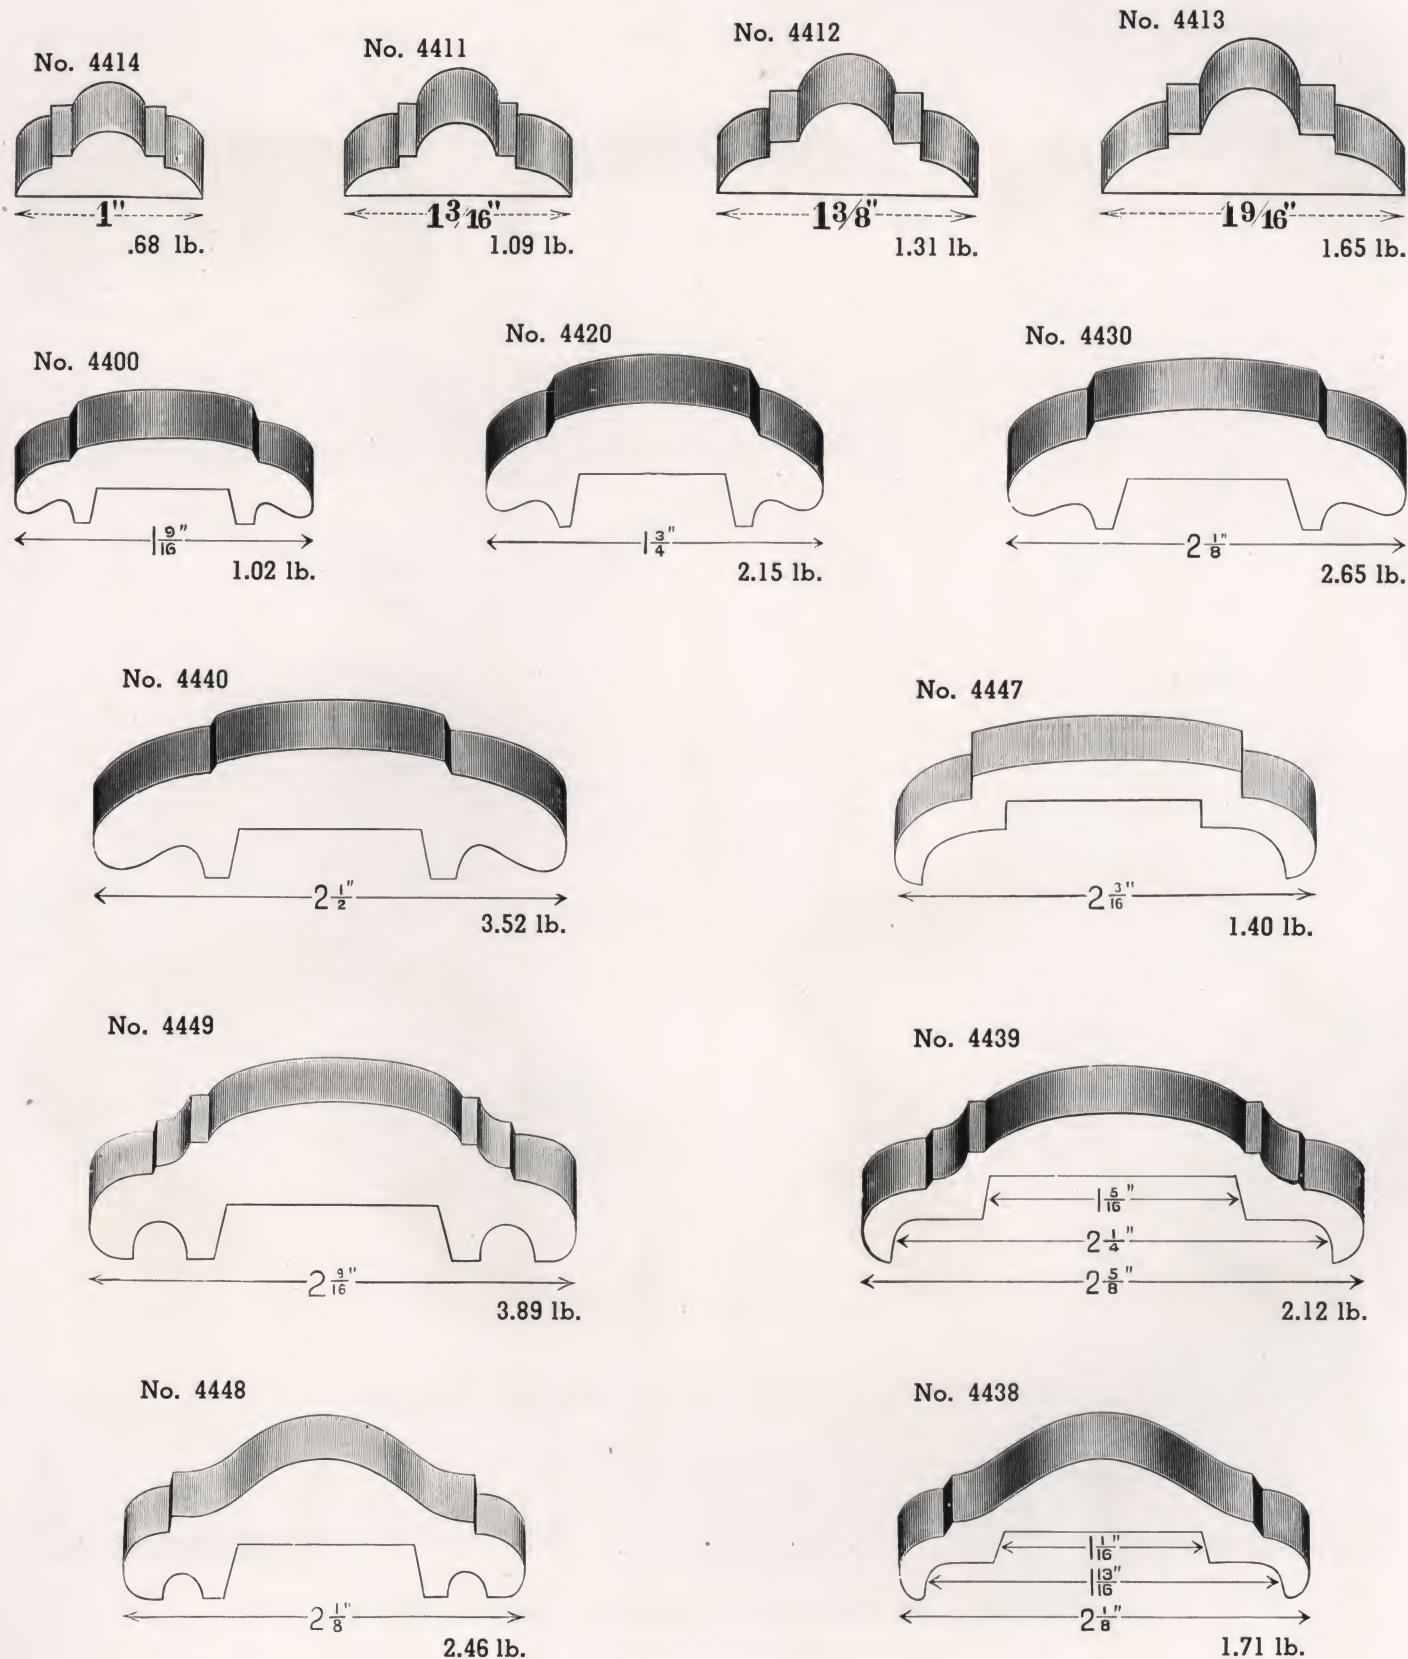


HANDRAIL WALL BRACKETS

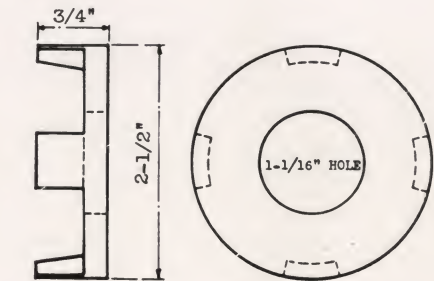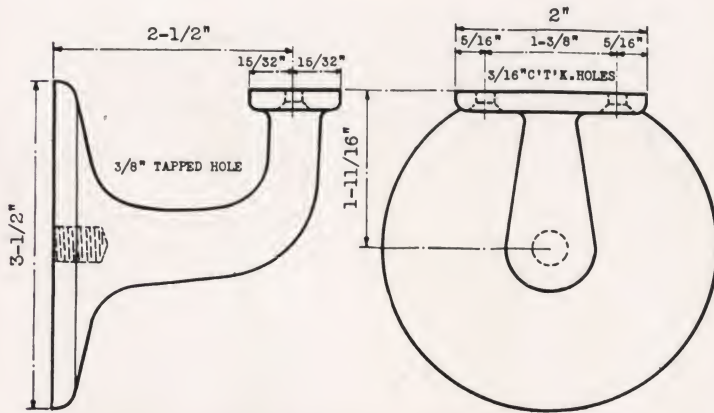



No. 372 Cast Iron Wall Bracket Filler

WITH FLAT TOP MEMBER
No. 373 Cast Iron
No. 377 Malleable Iron

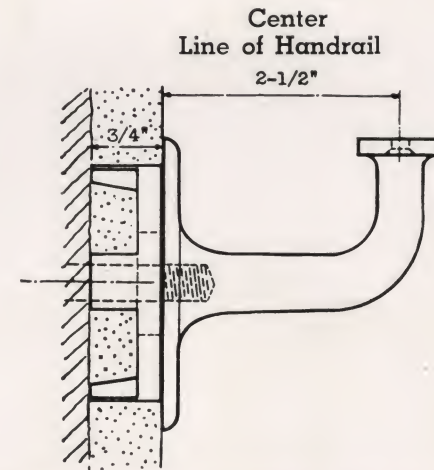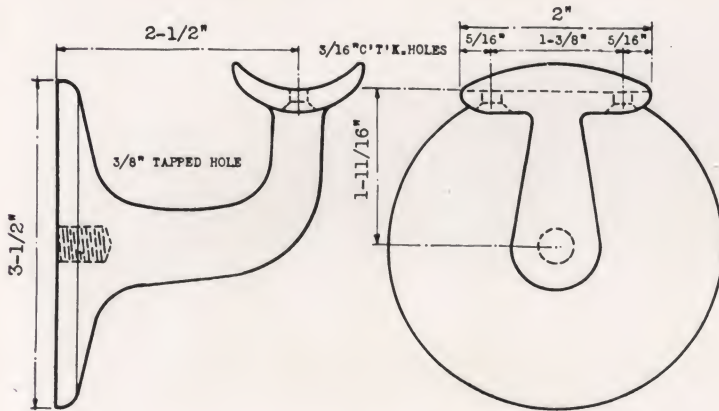

Showing method of fastening Wall Brackets
using Wall Bracket Filler No. 372

WITH CURVED TOP MEMBER
No. 374 Cast Iron
No. 378 Malleable Iron

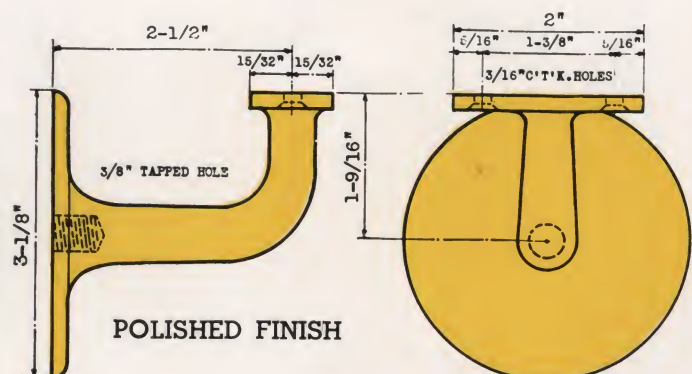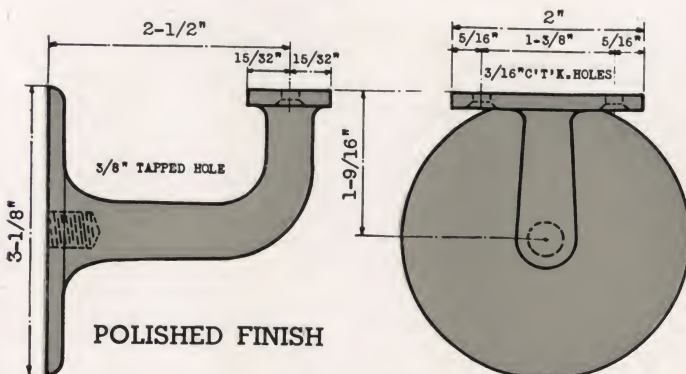

ARCHITECTURAL ALUMINUM
No. 371 with Flat Top Member
No. 376 with Curved Top Member

ARCHITECTURAL BRONZE
No. 370 with Flat Top Member
No. 375 with Curved Top Member

All Handrail WALL BRACKETS are furnished with a $\frac{3}{8}$ " drilled and tapped hole for fastening into the wall by means of toggle bolt, expansion bolt, wood screw, etc. They are also furnished with two $\frac{3}{16}$ " drilled and countersunk holes for fastening handrail to bracket.

Bronze and Aluminum Handrail WALL BRACKETS are a finished product, polished and lacquered.

POLISHED BRONZE FINIALS

Carried in stock with ROUND OR SQUARE BASE

Drilled and Tapped Hole in Base for $\frac{3}{8}$ " Bolt



6"

TYPE
No. 402



5"



4"



3"




1" BALL




1 $\frac{1}{4}$ " BALL

TYPE
No. 404

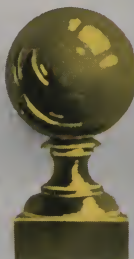

1 $\frac{1}{2}$ " BALL

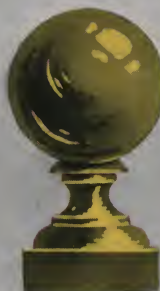

1 $\frac{3}{4}$ " BALL



2" BALL



6"

TYPE
No. 403



5"



4"



3"

STEEL FINIALS

Carried in stock ONLY with SQUARE BASE
Drilled and Tapped Hole in Base for $\frac{3}{8}$ " Bolt



TYPE
No. 452



1" BALL



1 1/4" BALL

TYPE
No. 454



1 1/2" BALL



1 3/4" BALL



2" BALL

Illustrations are shown ONE-HALF actual size
DIMENSIONS

No. 452 — Steel

Height	Sq. Base
3"	1"
4"	1 1/4"
5"	1 1/2"
6"	1 3/4"

No. 454 — Steel

Dia. Ball	Sq. Base
1"	7/8"
1 1/4"	1 1/8"
1 1/2"	1 1/4"
1 3/4"	1 1/2"
2"	1 3/4"

Aluminum Urn No. 432

4" high — 1 1/4" sq. base
same as Type No. 402

Aluminum Finial No. 434

1 1/2" ball — 1 1/4" sq. base
same as Type No. 404

No. 402 — Bronze

Height	Sq. Base	Rd. Base
3"	1"	1"
4"	1 1/4"	1 1/4"
5"	1 1/2"	1 1/2"
6"	1 3/4"	1 3/4"

No. 404 — Bronze

Dia. Ball	Sq. Base	Rd. Base
1"	7/8"	7/8"
1 1/4"	1 1/8"	1 1/8"
1 1/2"	1 1/4"	1 1/4"
1 3/4"	1 1/2"	1 1/2"
2"	1 3/4"	1 3/4"

No. 403 — Bronze

Height	Sq. Base	Rd. Base
3"	1"	1"
4"	1 1/2"	1 1/2"
5"	1 3/4"	1 3/4"
6"	2"	2"

BRONZE URNS



No. 405

Height 3 1/2"
Rd. Base 7/8"
Sq. Base 1"




No. 406

Height 4"
Rd. Base 1 1/8"
Sq. Base 1 1/4"

No. 405 and No. 406 Bronze Urns are not polished but have smooth, clean machined surface. Square bases are furnished loose to fit on round base of urn.

ORNAMENTAL BALUSTER COLLARS AND BASES

BRONZE — POLISHED FINISH

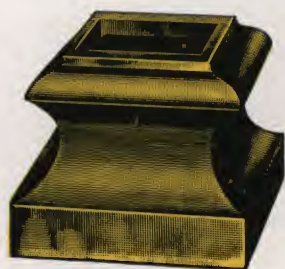

Square Hole

No.	Hole	Width
252	$\frac{1}{2}$ "	$1\frac{1}{4}$ "
253	$\frac{5}{8}$ "	$1\frac{1}{4}$ "
254	$\frac{3}{4}$ "	$1\frac{3}{8}$ "
267	1"	$1\frac{3}{4}$ "
268	$1\frac{1}{4}$ "	$2\frac{3}{4}$ "
269	$1\frac{1}{2}$ "	3"




Square Hole

No.	Hole	Width
262	$\frac{1}{2}$ "	$1\frac{1}{4}$ "
263	$\frac{5}{8}$ "	$1\frac{1}{4}$ "
264	$\frac{3}{4}$ "	$1\frac{3}{8}$ "




Square Hole

No. 265	$\frac{1}{2}$ " Square
No. 266	$\frac{5}{8}$ " Square

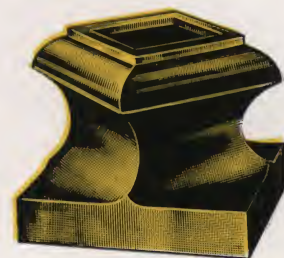


Square Hole
On Edge

No. 258	$\frac{1}{2}$ " Square $1\frac{1}{4}$ " Square Base
---------	--

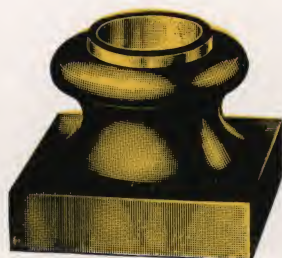

Round Hole


No.	Hole	Width
255	$\frac{3}{8}$ "	$1\frac{1}{4}$ "
256	$\frac{1}{2}$ "	$1\frac{1}{4}$ "
257	$\frac{5}{8}$ "	$1\frac{3}{8}$ "

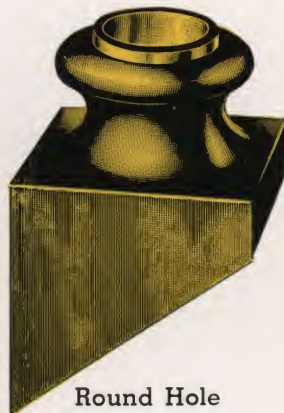

Round Hole

No.	Hole	Width
259	$\frac{3}{8}$ "	$1\frac{1}{4}$ "
260	$\frac{1}{2}$ "	$1\frac{1}{4}$ "
261	$\frac{5}{8}$ "	$1\frac{3}{8}$ "

ARCHITECTURAL BRASS

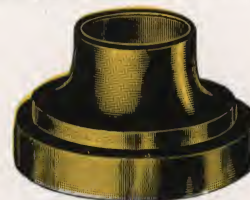


Round Base

No. 78	$\frac{3}{8}$ " Round Hole
No. 79	$\frac{7}{16}$ " Round Hole
No. 80	$\frac{1}{2}$ " Round Hole


CAST IRON BALUSTER COLLARS AND BASES

TYPE G

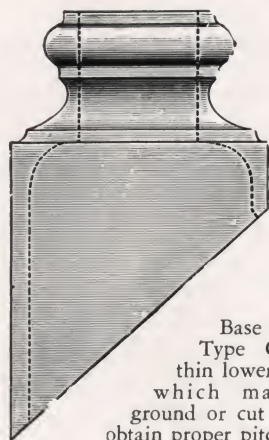


Base Collar
Type G has
thin lower edges
which may be
ground or cut off to
obtain proper pitch.


TYPE E

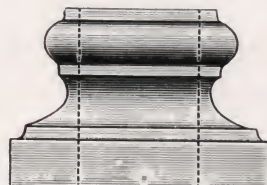

TYPE F

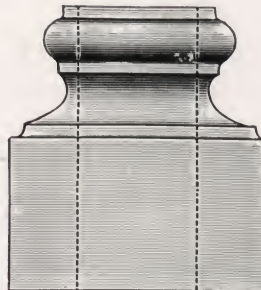


TYPE H

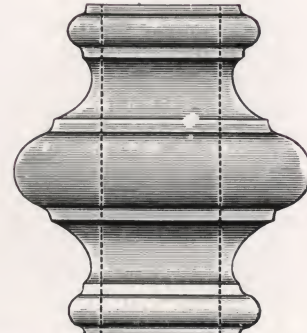

CAST IRON BALUSTER COLLARS AND BASES Types "E", "F", "G", "H"
are carried in stock with $\frac{1}{2}$ ", $\frac{5}{8}$ ", $\frac{3}{4}$ " (clear) square holes

ORNAMENTAL BALUSTER COLLARS and BASES

— CAST IRON —

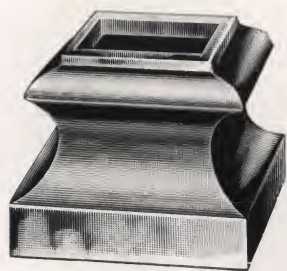


Square Hole

No.	Hole	Width
352	1/2"	1 1/4"
353	5/8"	1 1/4"
354	3/4"	1 3/8"
367	1"	1 3/4"
368	1 1/4"	2 3/4"
369	1 1/2"	3"




Square Hole

No.	Hole	Width
362	1/2"	1 1/4"
363	5/8"	1 1/4"
364	3/4"	1 3/8"

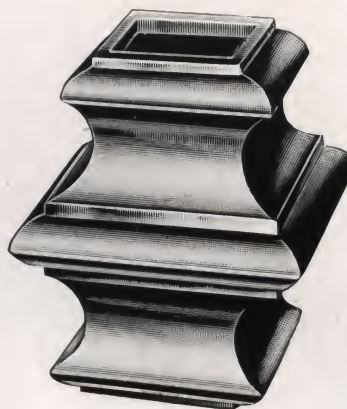

Square Hole

No. 365	1/2" Square
No. 366	5/8" Square

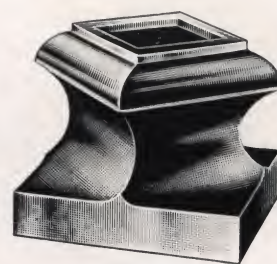

Square Hole
On Edge


No. 358	1/2" Square
	1 1/4" Square Base

— CAST IRON —



Round Hole

No.	Hole	Width
355	3/8"	1 1/4"
356	1/2"	1 1/4"
357	5/8"	1 3/8"

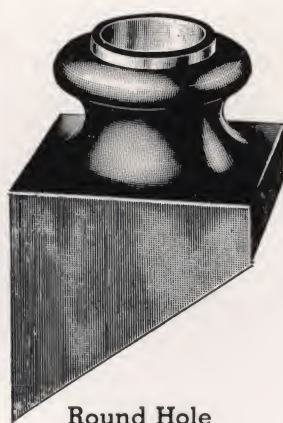

Round Hole


No.	Hole	Width
359	3/8"	1 1/4"
360	1/2"	1 1/4"
361	5/8"	1 3/8"

— STEEL —



Round Collar

No. 72	1/2" Round Hole
--------	-----------------

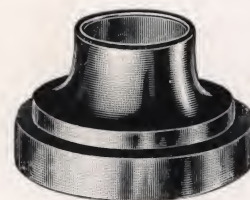

Round Base


No. 75	3/8" Round Hole
No. 76	1/2" Round Hole
No. 77	5/8" Round Hole




Round Collar

No. 73	3/8" Round Hole
No. 74	5/8" Round Hole

— HEAT TREATED FERROUS ALLOY —

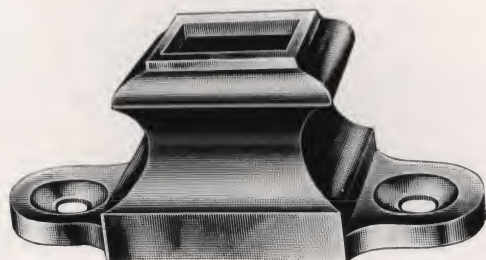


No. 390	1/2" Square Hole
No. 391	5/8" Square Hole

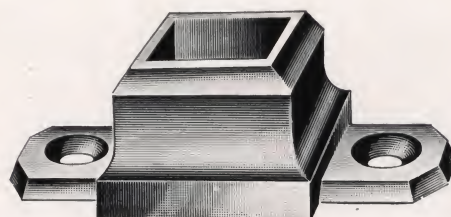


No. 350	1/2" Square Hole
No. 351	5/8" Square Hole

ROLLED STEEL BALUSTER BARS


No. 4180




No. 4181




No. 4182




No. 4192

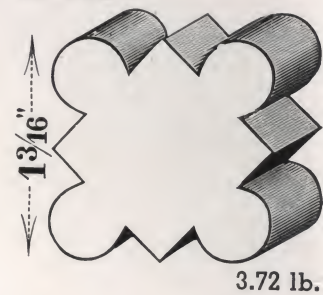


No. 4185

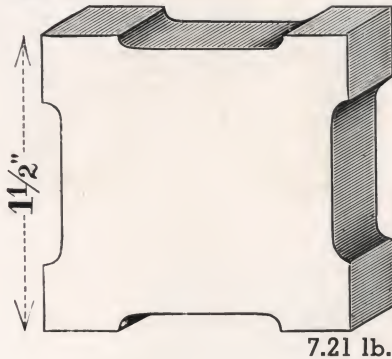


No. 4184

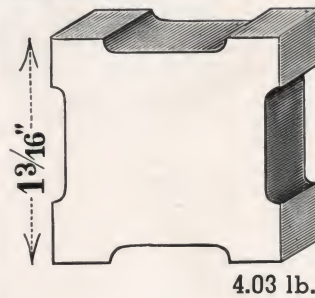

No. 4183

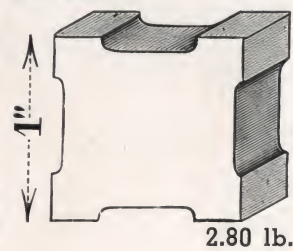

No. 4191

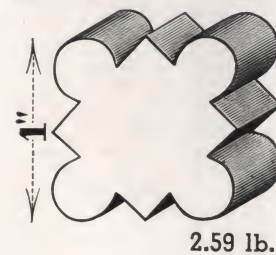


No. 4190




HAND-HAMMERED EFFECT


No. 4195

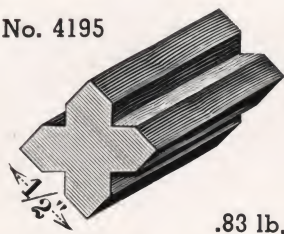

No. 4196

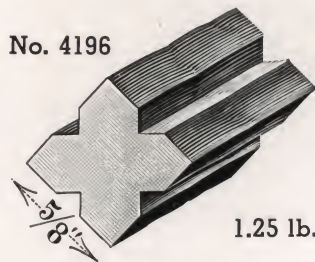

No. 4197

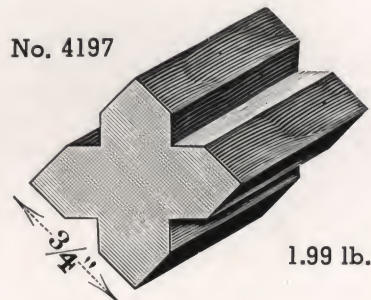


No. 4189




Baluster Bars shown here may be twisted to produce highly artistic results. Very effective designs may also be created by combining with our Forged Spindles or Ornamental Balusters.


No. 4291




No. 4290



No. 4292




No. 4295

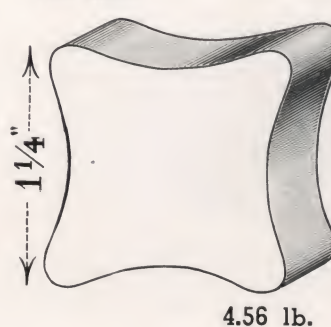

No. 4188



No. 4187



TWISTED BARS in the same shape as the three shown above are carried in 20 ft. lengths. In ordering these bars twisted, specify following numbers:

3/8"—No. 4286 1/2"—No. 4287 5/8"—No. 4288

ORNAMENTAL BALUSTER COLLARS



No. 544 — $\frac{1}{2}$ " Sq. Hole
No. 545 — $\frac{5}{8}$ " Sq. Hole




No. 546 — $\frac{1}{2}$ " Sq. Hole
No. 547 — $\frac{5}{8}$ " Sq. Hole




No. 543 — $\frac{1}{2}$ " Sq. Hole
No. 535 — $\frac{5}{8}$ " Sq. Hole

**ORNAMENTAL BALUSTER COLLARS ARE INEXPENSIVE
AND HIGHLY DECORATIVE. USED SINGLY OR IN COMBINATIONS.**

EASILY APPLIED, CAN BE FASTENED BY SCREW, TACK WELD OR CALKING
HEAT TREATED FERROUS ALLOY CASTINGS — FREE FROM BREAKAGE

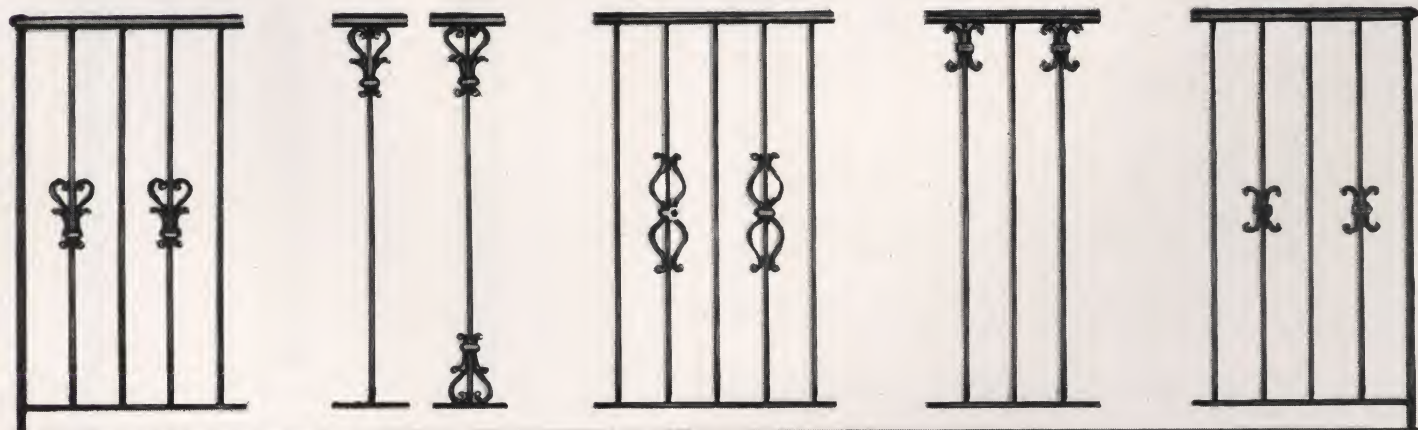

A FEW TYPICAL APPLICATIONS OF ORNAMENTAL BALUSTER COLLARS
FOR RAILING ORNAMENTATION

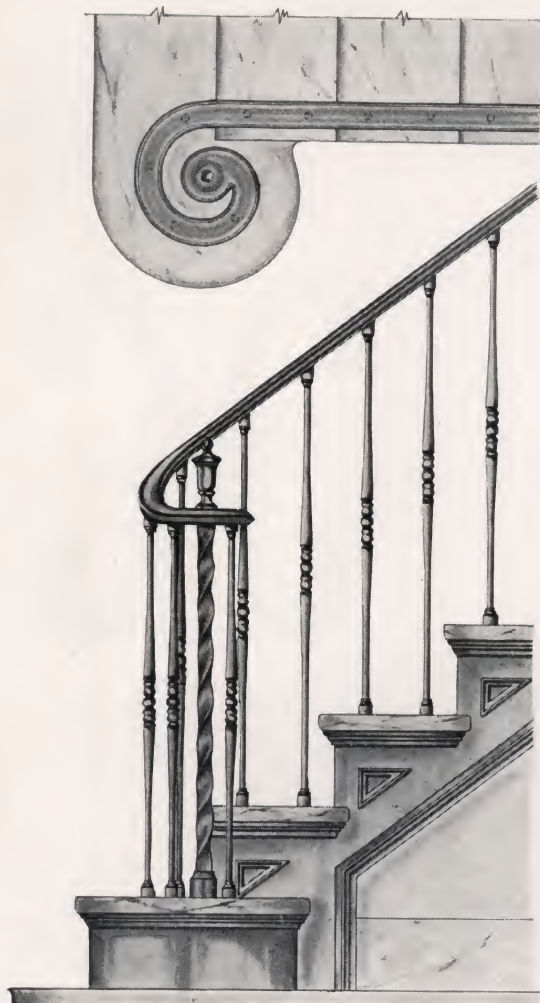

Hollow Tapered Steel Spindles

RAILING

Specification: Rolled Steel, Bronze or Aluminum Handrail, curved as shown. *Newel Post:* Twisted Square Steel Tubing. Polished Bronze or Steel Finial. Hollow Steel Spindles with steel or brass collars used for baluster bars. Rolled Steel Mouldings applied to stair stringer, underneath treads and to riser panel.

Hollow Tapered Steel Spindles can be used advantageously for ornamental iron work, such as:

Balusters, Grilles, Balcony Railings, Doors,
Bank Work, Furniture, Lamps, Partitions,
Table Legs, Drapery Rods, Window Guards,
Awning Rods, Ventilator Openings, etc., etc.

On account of their **EXTREMELY LOW COST**, HOLLOW STEEL SPINDLES can be used for work at commercial prices.

For high class work, we recommend forged spindles as shown on Page Nos. 21, 22.

HOLLOW STEEL SPINDLES may be easily polished and plated. They are strong, but light in weight.



No. 300
1 1/4" in center
tapering to
3/4" on ends



No. 310
1" in center
tapering to
5/8" on ends



No. 320
3/4" in center
tapering to
3/8" on ends

Nos. 300 and 320 carried in stock in 3 ft. lengths.
No. 310 carried in stock in 3 and 5 ft. lengths.

No. 325
½" round at
ends



No. 326
⅜" round at
ends



No. 327
½" round at
ends



No. 328
⅝" round at
ends




FORGED SPINDLES

These spindles are forged from SOLID stock.

Carried in stock in three-foot lengths. Other lengths can be furnished from mill.

Forged spindles may be used for the construction of stair and balcony railings, window guards, grilles, doors, awning rods, gates, partitions, transoms, table legs, lamps, etc.

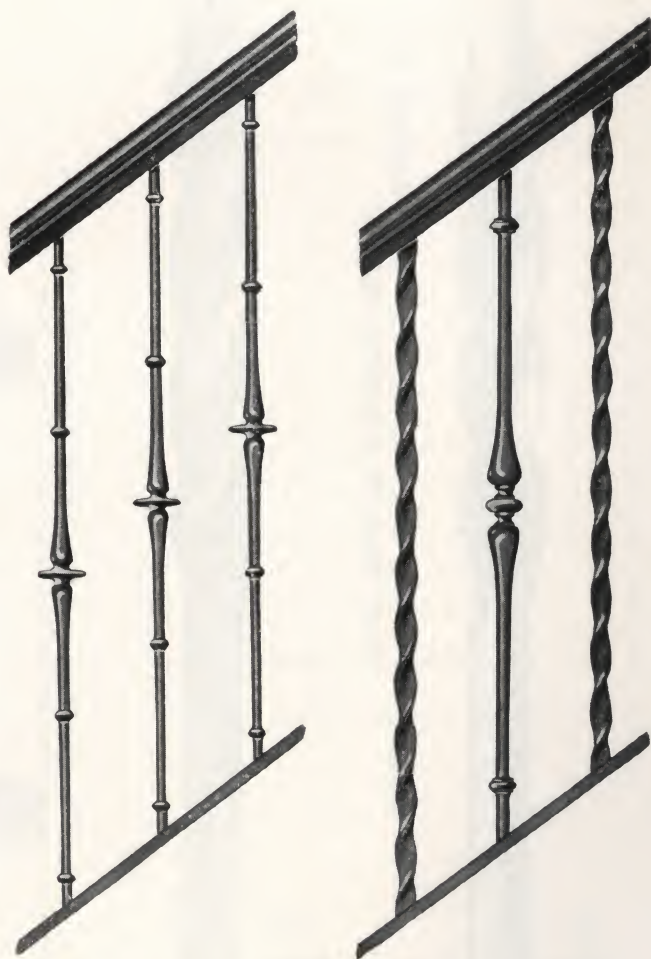

Bases and Collars with round holes are carried in stock in Cast Iron, Steel and Polished Bronze for use with Forged and Hollow Steel Spindles.

Collars shown on tapered stems of Forged Spindles Nos. 325 and 327 can be furnished loose for alignment to required position when spindles are used on stair treads.

Illustrations are ONE-QUARTER actual size

FORGED STARTING POSTS & BALUSTER BARS

SCALE: 3" = 1'-0"




No. 332

BASES SHOWN ARE UNATTACHED, CAN BE FURNISHED IN
CAST IRON OR POLISHED BRONZE




No. 343

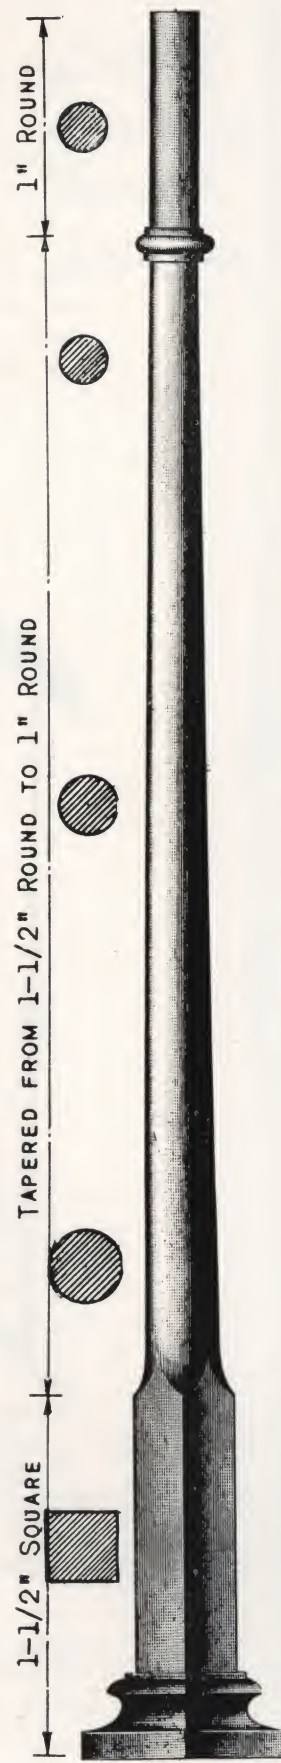

No. 331

LENGTH . . . 3'-0"

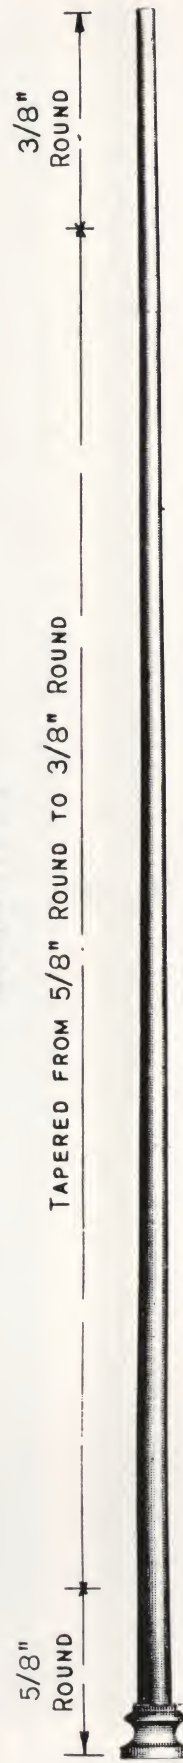

No. 329



No. 330

ORNAMENTAL CAST IRON POSTS

SCALE: 3" = 1'-0"



No. 333



No. 335



No. 334

Ornamental and practical in design these Cast Iron Starting Posts may be used in effective combinations with our Panel Castings, Ornamental Balusters or Forged Spindles.

They are designed to allow for adjustment to varying heights and may be made shorter without interference with the ornamentation.


Base Collars suitable for use with these posts are shown on page 17.

DIMENSIONS


	<i>Length</i>	<i>Base</i>	<i>Top</i>
No. 333	3'-0"	1½" Sq.	⅞" Rd.
No. 334	3'-0"	1" Rd.	1" Rd.
No. 335	3'-0"	1¼" Sq.	1¼" Sq.

ORNAMENTAL BALUSTER BARS


(SCALE: 3" = 1'-0")

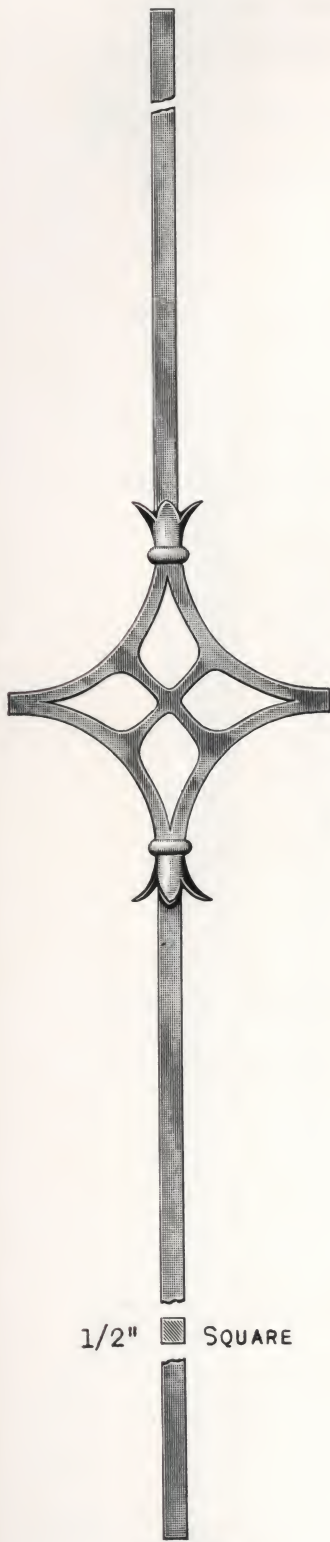

No. 528

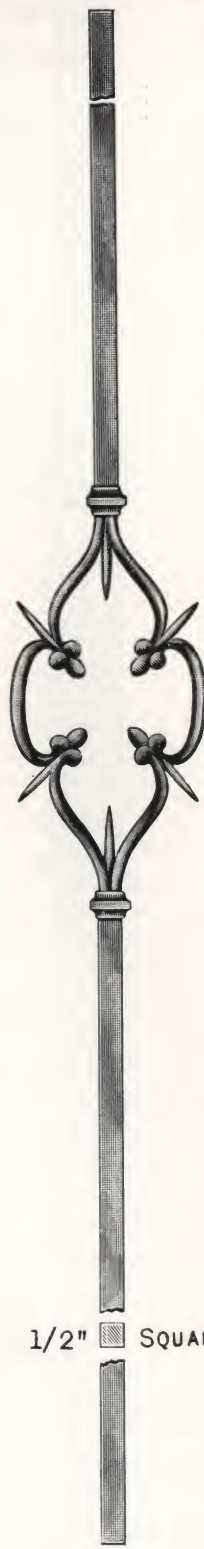

No. 533

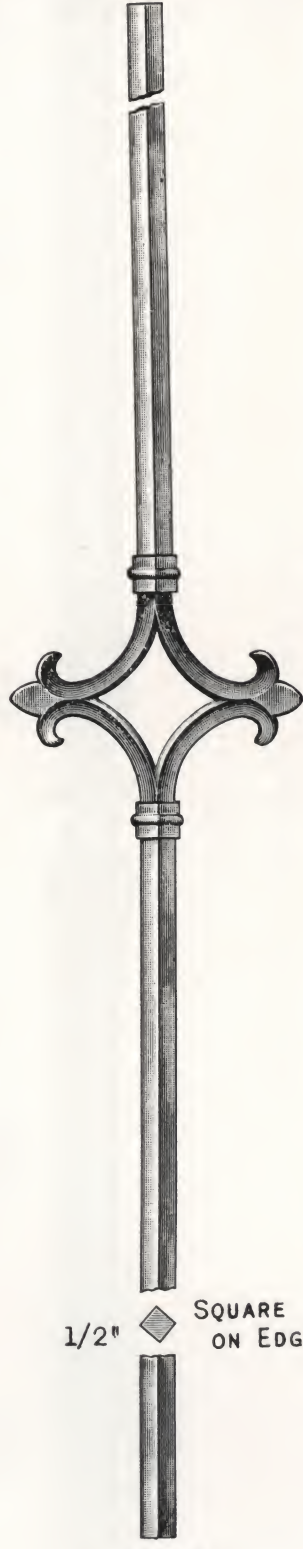

No. 534




No. 532

3' 3" MINIMUM LENGTH OF BARS

Ornamental Baluster Bars have decorative centers of heat-treated ferrous alloy, electrically welded to soft steel bars. The assembled units are annealed after welding to produce high tensile strength; bars may be welded or drilled and tapped.

ORNAMENTAL BALUSTER BARS

(SCALE: 3" = 1'-0")

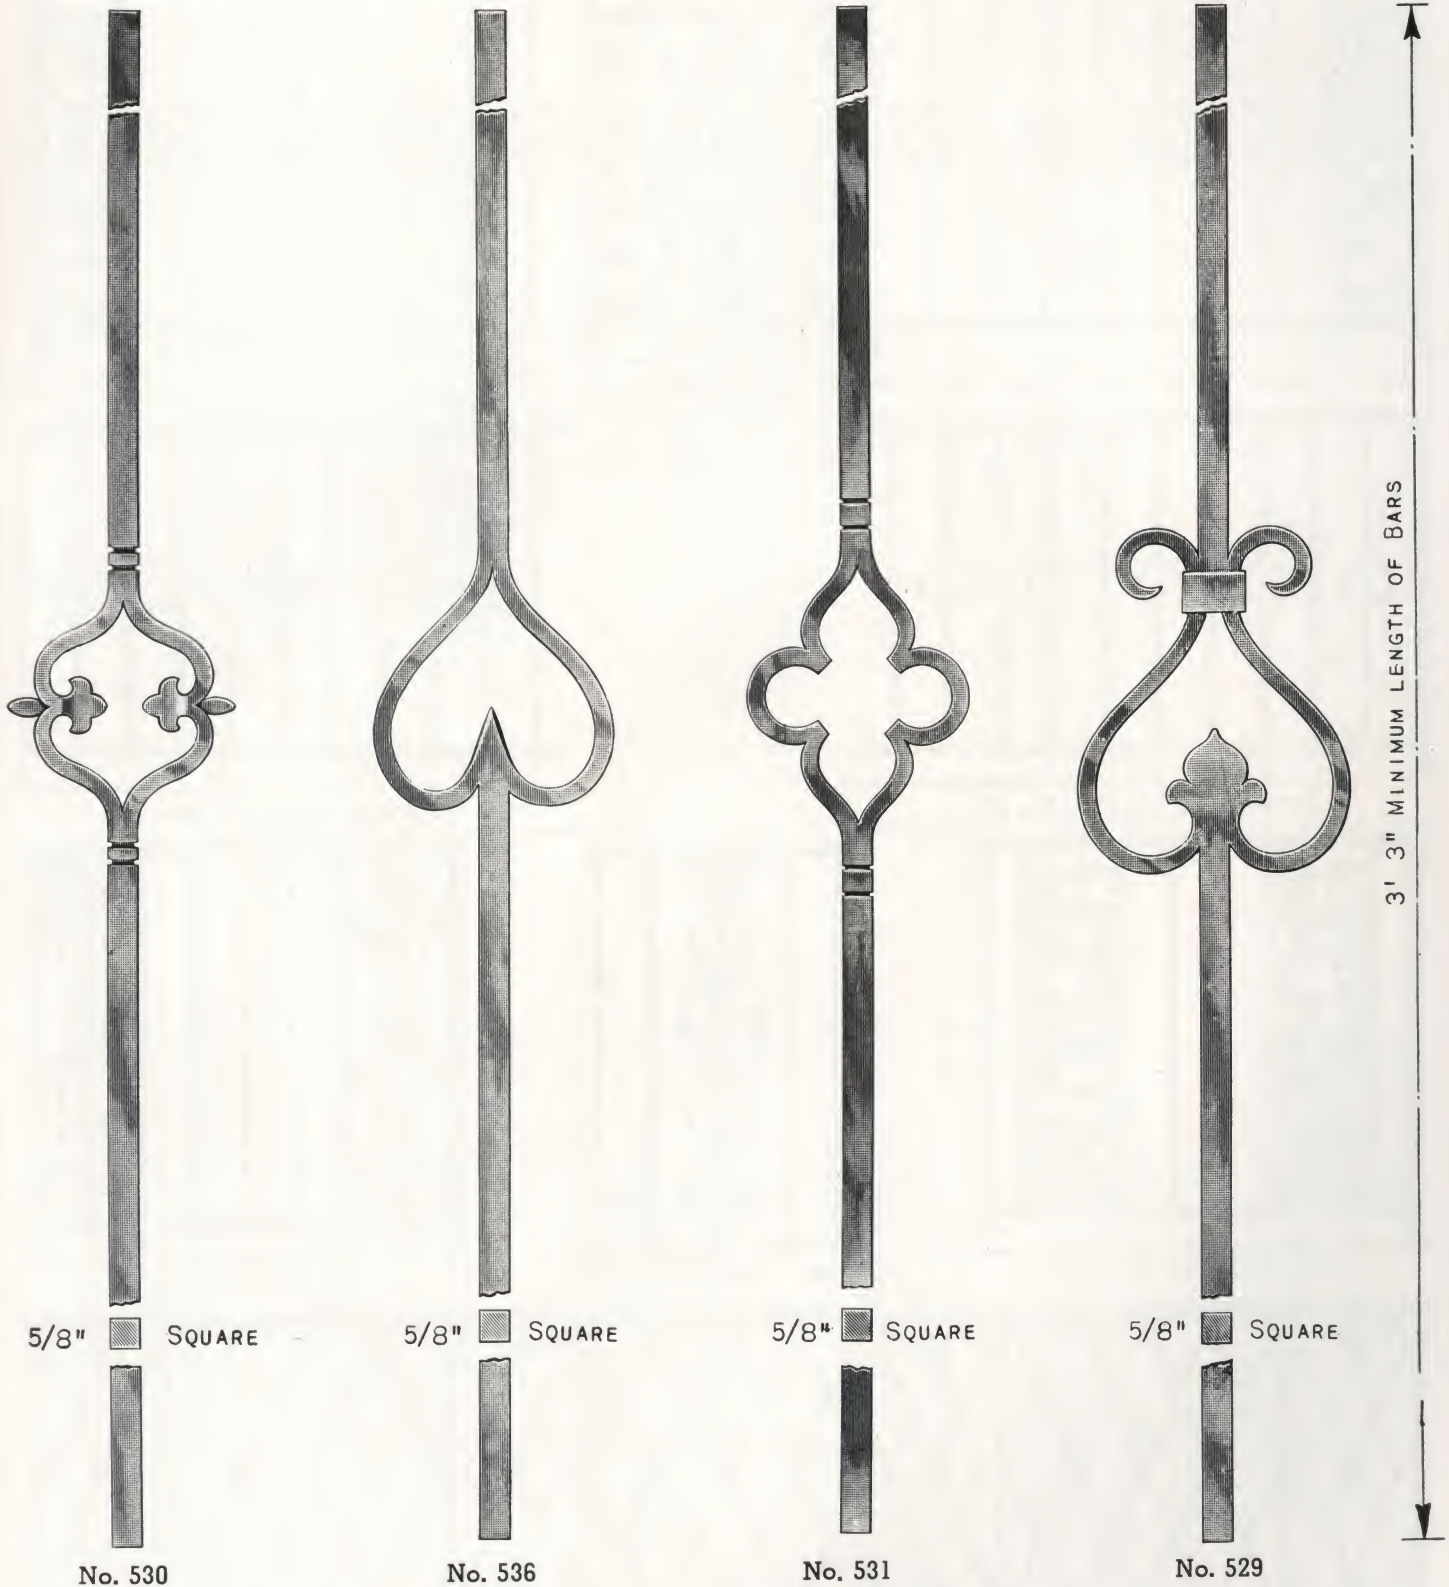


Ornamental Baluster Bars are furnished in one piece of sufficient length for use on any type of incline. Ornamental Center Castings of the same designs can be supplied without bars attached, for use in special applications, offering unlimited possibilities of design.


RAILINGS CONSTRUCTED WITH STOCK CASTINGS




End Panels No. 520 Casting—Centre Panel No. 521 Combined with No. 520 Castings—Ornamental Baluster No. 532

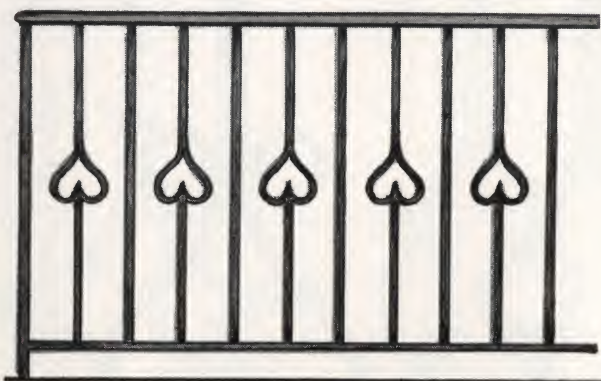

Ornamental Baluster No. 536

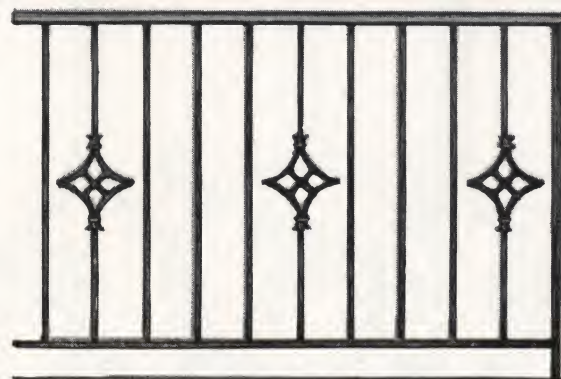


Ornamental Baluster No. 528

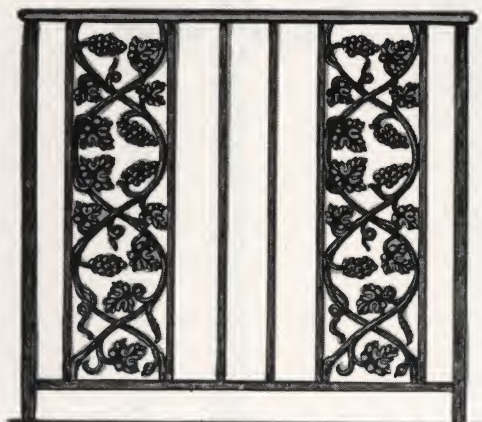


Panel Casting No. 511



Panel Casting No. 518

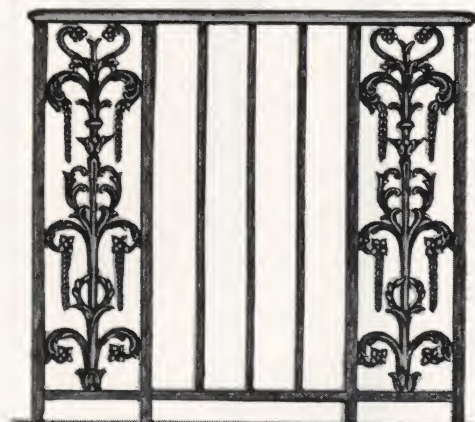

Panel Casting No. 517

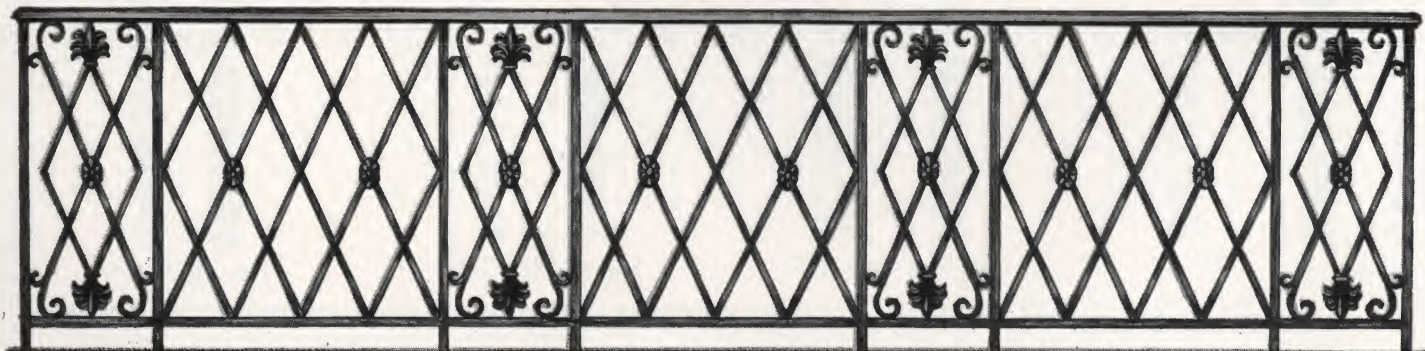

Panel Casting No. 541 Combined with Casting No. 540

ORNAMENTAL DOUBLE FACED CASTINGS

SCALE: 1" = 1'-0"



No. 538
HEIGHT: 2'-9"




No. 518
HEIGHT: 2'-11 $\frac{1}{8}$ "



No. 539
HEIGHT: 3'-1"



No. 517
HEIGHT: 2'-11 $\frac{1}{8}$ "

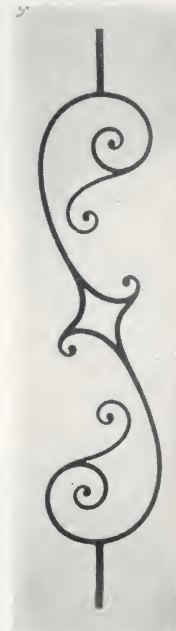

No. 537
HEIGHT: 3'-1"


Ornamental Double Faced Panel Castings may be used in repetition or in combination with forged spindles and ornamental balusters.

Clean in appearance with perfectly executed details.

Heat Treated Ferrous Alloy Castings may be bent or curved, hammer marked, electric welded or brazed.



No. 519
HEIGHT: 2'-8 $\frac{1}{16}$ "

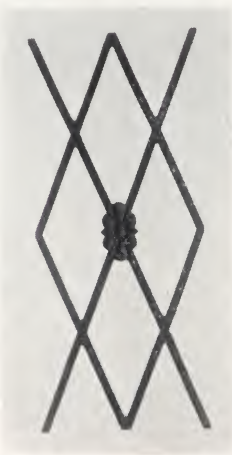


No. 540
HEIGHT: 2'-0 $\frac{5}{8}$ "



No. 521
HEIGHT: 2'-0 $\frac{7}{8}$ "



No. 520
HEIGHT: 2'-0 $\frac{7}{8}$ "

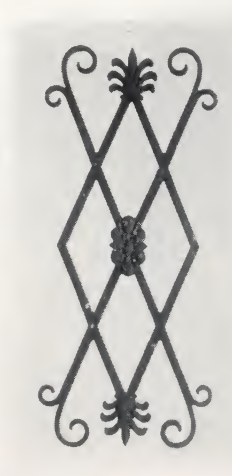

No. 541
HEIGHT: 2'-0 $\frac{5}{8}$ "



No. 511
HEIGHT: 2'-7 $\frac{3}{8}$ "

NEWEL POST CAPS AND DROPS




TYPE "A"

2" x 2" Square
2½" x 2½" "
3" x 3" "
3½" x 3½" "
4" x 4" "

CAST IRON

3" x 4" Rectangular
3" x 6" "
3" x 8" "
4" x 6" "
4" x 8" "

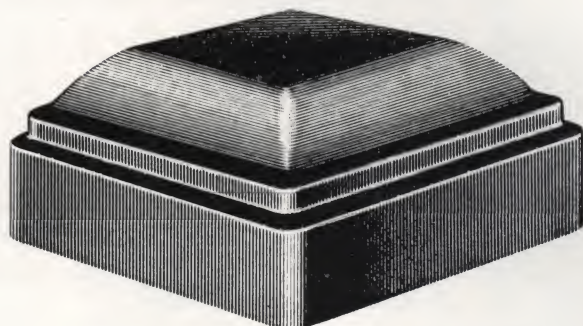


TYPE "W"

PRESSED STEEL

These caps do not require fastening as they fit snugly over the ends of the Tubes

3" x 3" Square
4" x 4" "

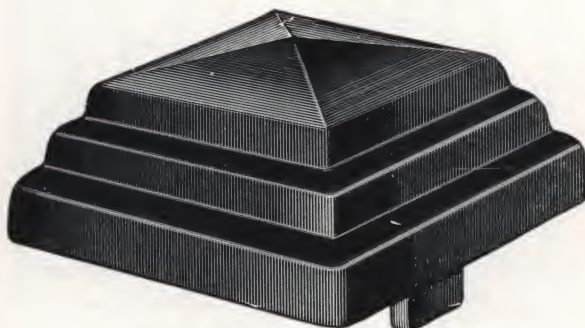

TYPE "B"
with LUGS

CAST IRON

3" x 3" Square
3½" x 3½" "
4" x 4" "




TYPE "C"
with LUGS

CAST IRON

1½" x 1½" Square
2" x 2" "
2½" x 2½" "
3" x 3" "

TUBE SOCKETS

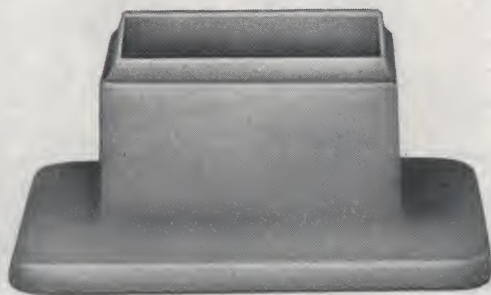

MALLEABLE IRON

1" x 1" Square
1¼" x 1¼" "
1½" x 1½" "
2" x 2" "
2½" x 2½" "
3" x 3" "




BALL CAP
CAST IRON

2" x 2" Square
2½" x 2½" "
3" x 3" "
3½" x 3½" "
4" x 4" "


All Sizes Shown Are Outside Measurements of Tube
For SQUARE and RECTANGULAR TUBING—SEE PAGES 96 and 97

FORGED WROUGHT IRON PICKETS AND FINIALS

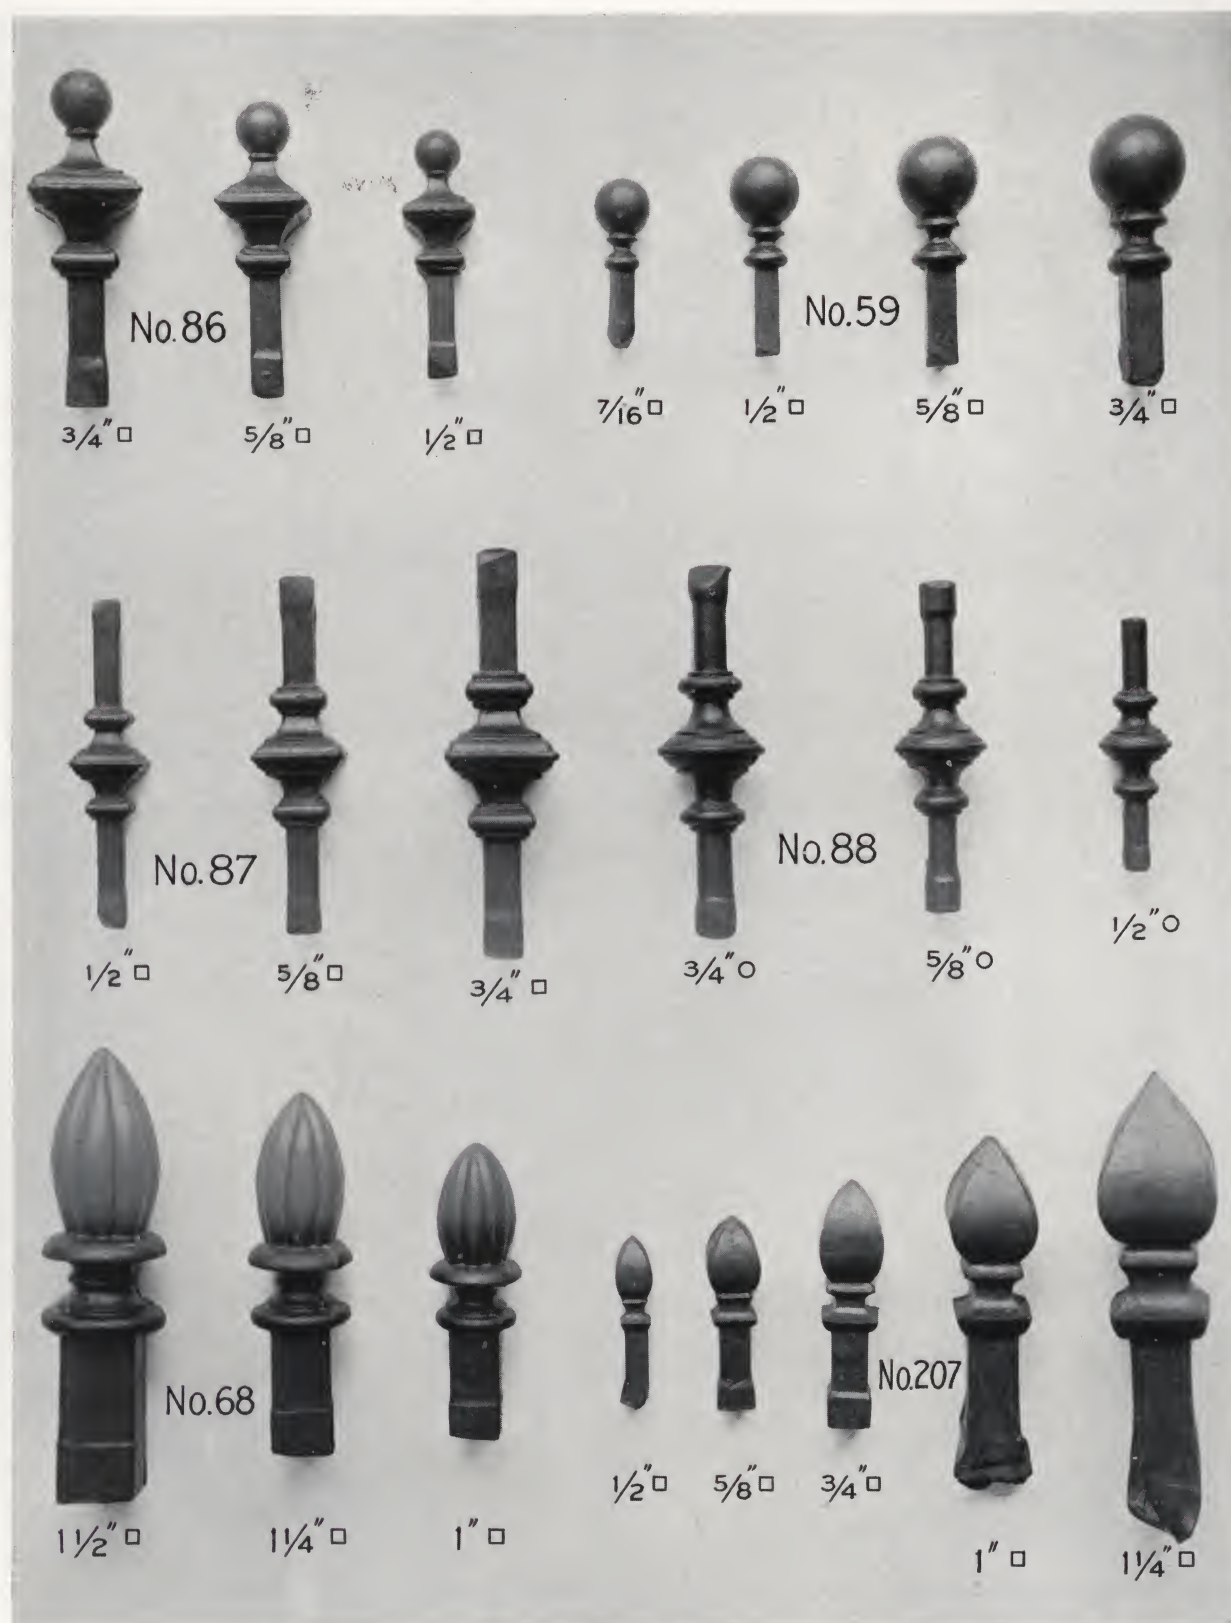

Illustrations shown are ONE-QUARTER actual size

FORGED WROUGHT IRON PICKETS AND FINIALS

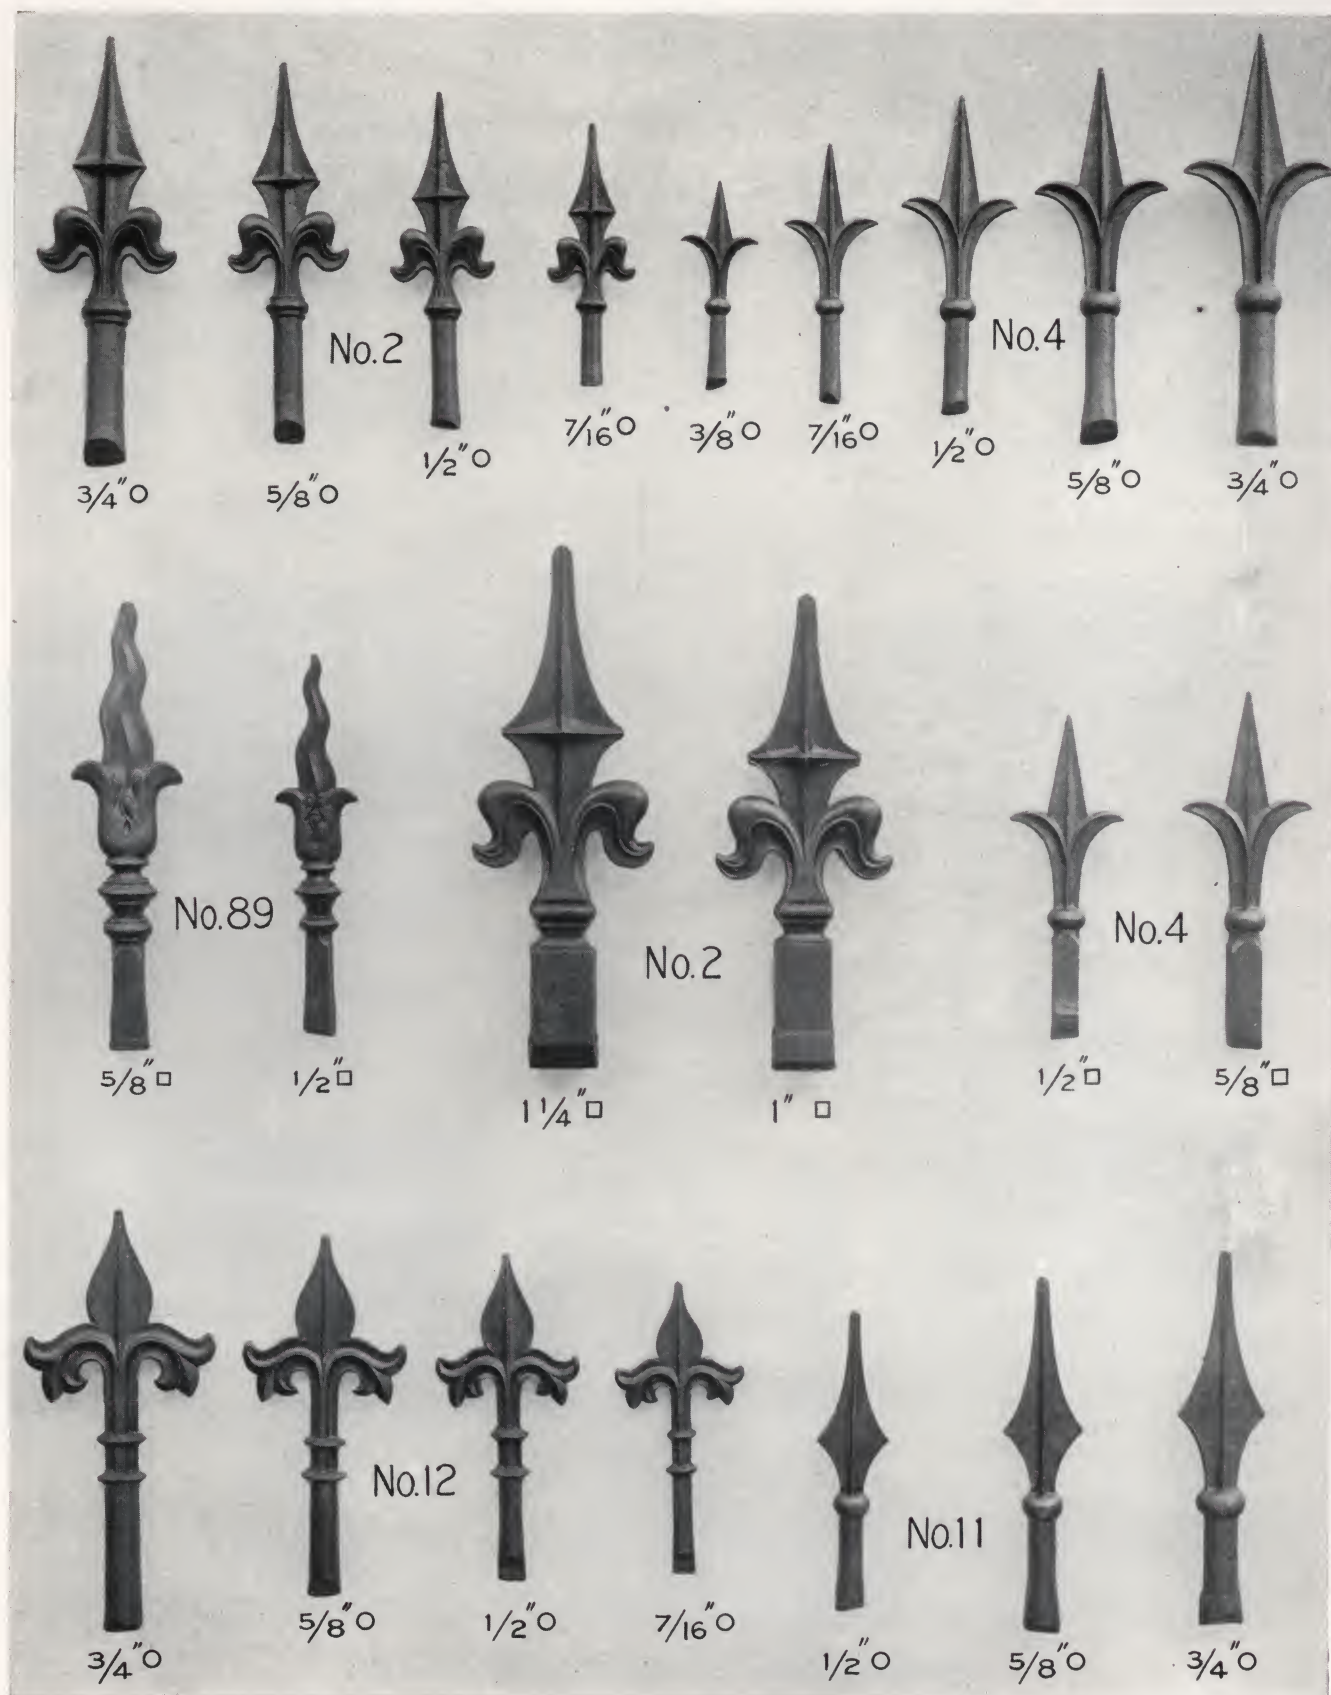

Illustrations shown are ONE-QUARTER actual size

FORGED WROUGHT IRON PICKETS AND FINIALS



Illustrations shown are ONE-QUARTER actual size

RAILING DESIGN



SPECIFICATION


End Panel and Center Panel — Casting No. 538
Ornamental Baluster — No. 529

TREILLAGE DESIGNS



SPECIFICATION

Column — Casting No. 541
Railing — Casting No. 540
Frieze — Rosette No. 554

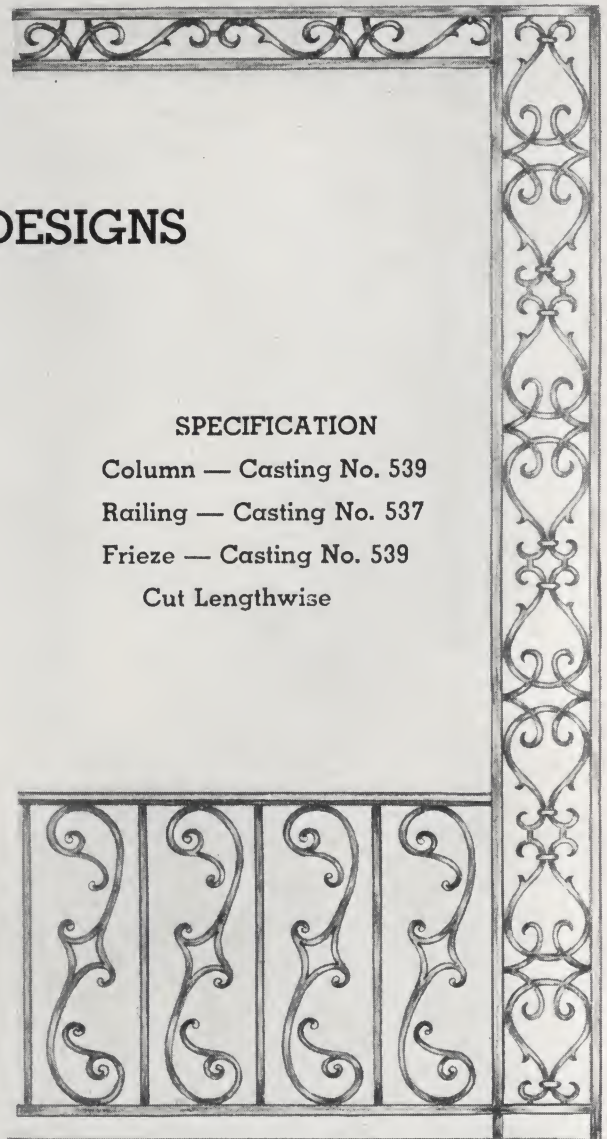

SPECIFICATION

Column — Casting No. 539
Railing — Casting No. 537
Frieze — Casting No. 539
Cut Lengthwise

TREILLAGE

JULIUS BLUM Ornamental Castings can be used to create effects which add distinctive beauty to residential and commercial buildings.

The motifs shown on the following pages can be combined to create continuous or all over designs of infinite variety, at surprisingly low cost.

They are used appropriately for the construction of:

Verandas	Grilles	Railings	Roof Terraces
Porches	Fences	Trellis	Gates
Pergolas	Balconies	Panels	Summer Houses, etc.

Ornamental Double Faced Castings are made of Heat Treated Ferrous Alloy. They are clean in appearance with every detail perfectly executed. This Alloy has a very high tensile strength, does not pit when exposed to atmospheric conditions and may be wrought cold like wrought iron and otherwise finished like genuine wrought iron.

The use of these Castings eliminates breakage through abuse, and straight pieces may be bent or shaped cold to fit the curves of balconies, railings, etc.

All double faced castings can be used right or left hand. Connections may be electrically welded as well as gas welded, although when gas welding is used care must be exercised not to overheat the metal.

JULIUS BLUM services are available for any information or details necessary regarding design, construction or lay-out of the Castings shown.

For additional suggestions on designs write for our Booklet "TREILLAGE."

TREILLAGE


The delicate and picturesque qualities of cast treillage have long been a source of admiration to those who have viewed this form of decorative iron work. Splendid examples of such construction dating back to early colonial days have become landmarks of the South and many attractive forms of this work are still to be seen on buildings which have withstood the trend of expansion and modernization in the older historical sections of metropolitan areas.

Typically American and definitely belonging to our form of early architecture, cast treillage has gained greatly in popularity in recent years.

By maintaining a complete stock of the various Heat Treated Alloy Castings shown in this catalog, Julius Blum & Co., Inc. gives the architect and iron worker the opportunity to present to the builder and home owner, duplications of the "lace-like" and decorative detail of this early American type of architecture.


The many objections and handicaps involved in the use of cast iron have been overcome in our Heat Treated Alloy Castings. Delicate leaf and cluster forms characteristic of our many patterns are left to hang free because there is no danger of breakage through misuse. This open detail also eliminates temperature stresses and fully utilizes the strength and toughness of the metal.

Fabrication and assembly of our castings are easily accomplished through modern shop practice and welding.

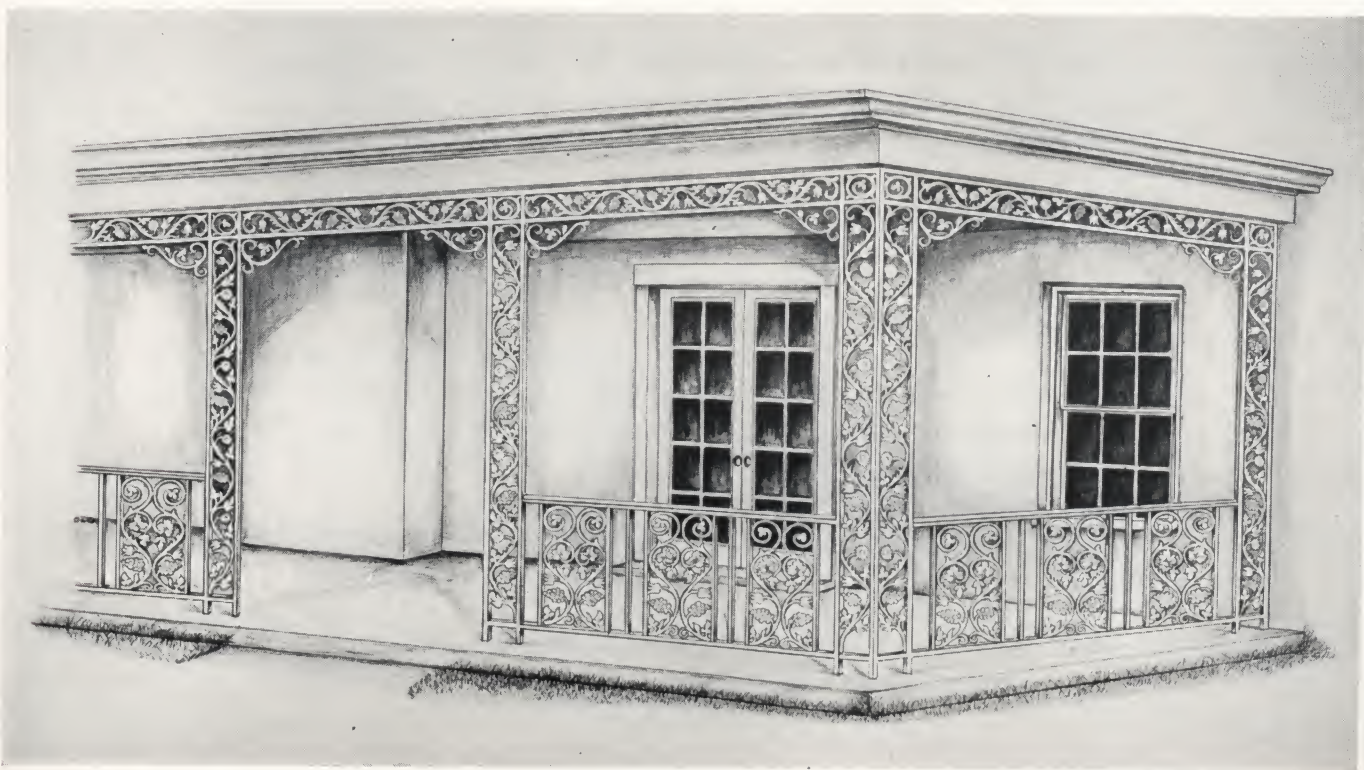


ORNAMENTAL DOUBLE FACED CASTINGS


SCALE: $1\frac{1}{2}" = 1'-0"$

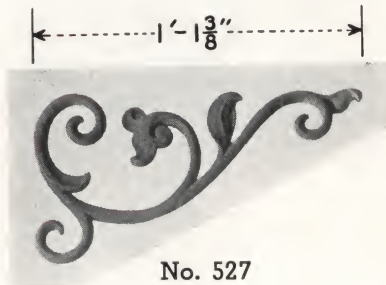

No. 527

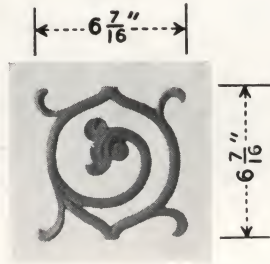


No. 526

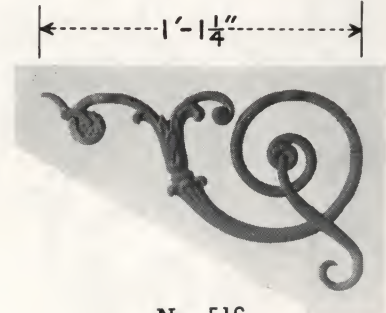

No. 516

A series of related designs in varied patterns and sizes which may be combined to meet required dimensions and conditions.

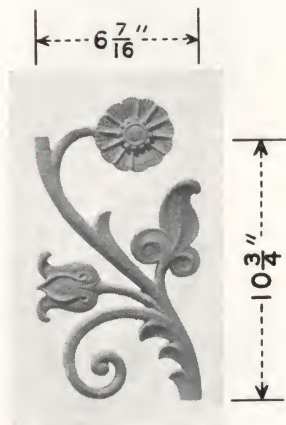

No. 524



No. 521




No. 520



No. 525



No. 523

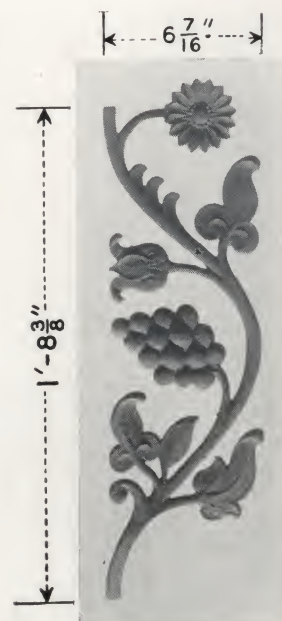

No. 522

Castings No. 520 and No. 521 shown above are especially suited for railing panels.

Castings No. 522, 523 and 524 may be repeated or alternated.

All castings are reversible.

See illustration page 34.

ORNAMENTAL DOUBLE FACED CASTINGS


SCALE $1\frac{1}{2}" = 1'-0"$



No. 513
In Three Pieces
Length of Sides:
3'-0" x 3'-0"



No. 514
Length: 1'-2"

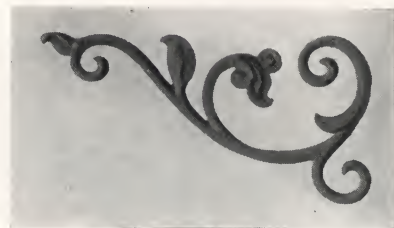

No. 527
Length: 1'- $13\frac{3}{8}"$




No. 512
Height: $8\frac{1}{4}"$
Width: $8\frac{1}{4}"$

This series of related designs can be used in many effective combinations and is adaptable for innumerable uses and forms of construction.

All castings are double faced and may be used right and left.

Over all dimensions of castings are shown.

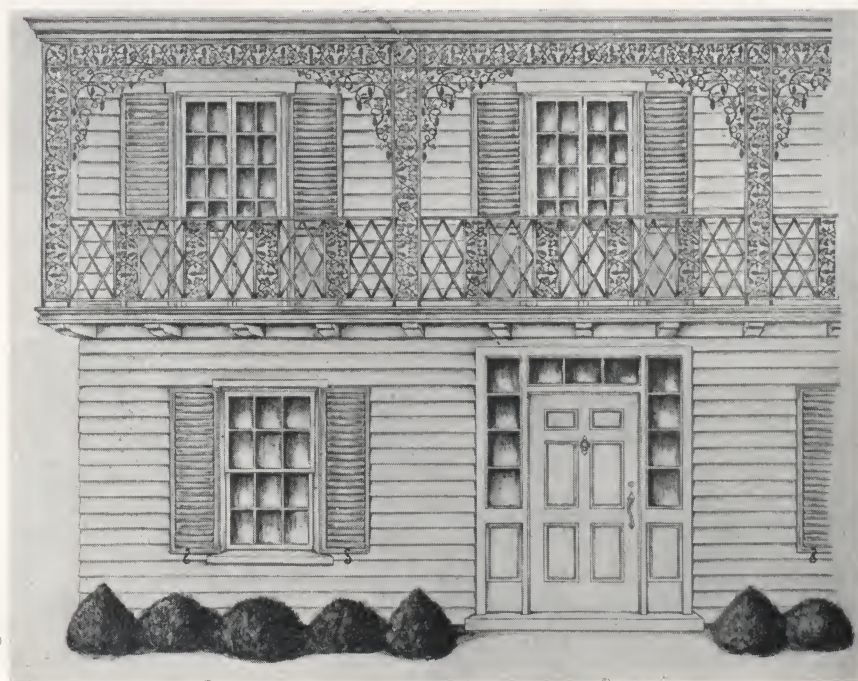

No. 511
Length: 2'- $7\frac{3}{8}"$
Width: $8\frac{1}{4}"$

ORNAMENTAL DOUBLE FACED CASTINGS

SCALE $1\frac{1}{2}" = 1'-0"$




No. 550

Height . $2'-10\frac{1}{4}"$
Width . . . $7\frac{1}{8}"$



No. 551

Height . . . $7\frac{1}{8}"$
Width . . . $7\frac{1}{8}"$

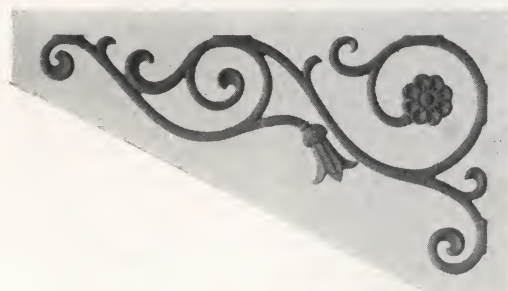

No. 552


Length . . . $1'-7"$

A series of designs to produce a graceful scroll-like effect. Although delicate and light in appearance these castings have ample strength for all practical purposes and are easily assembled.

No. 551 Casting may be used for corner terminations or railing panels.


No. 552 Casting is also adaptable as a hanging sign or lamp bracket.

Illustration on right shows front entrance porch with casting **No. 550** used in column and frieze.

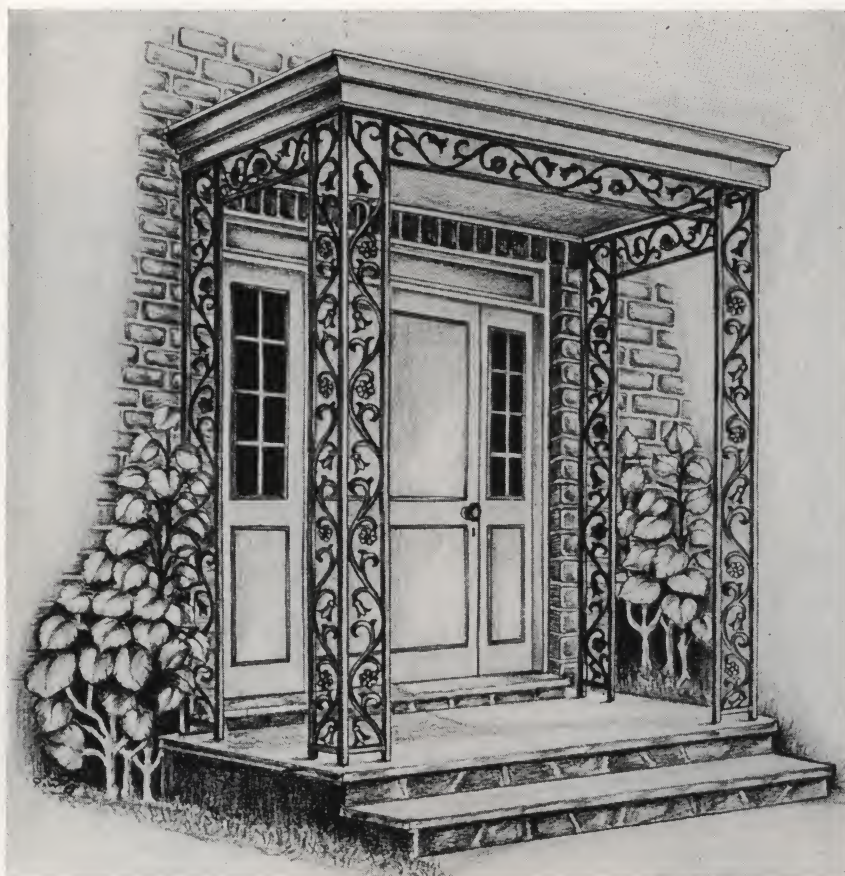

ORNAMENTAL DOUBLE FACED CASTINGS

SCALE $1\frac{1}{2}" = 1'-0"$

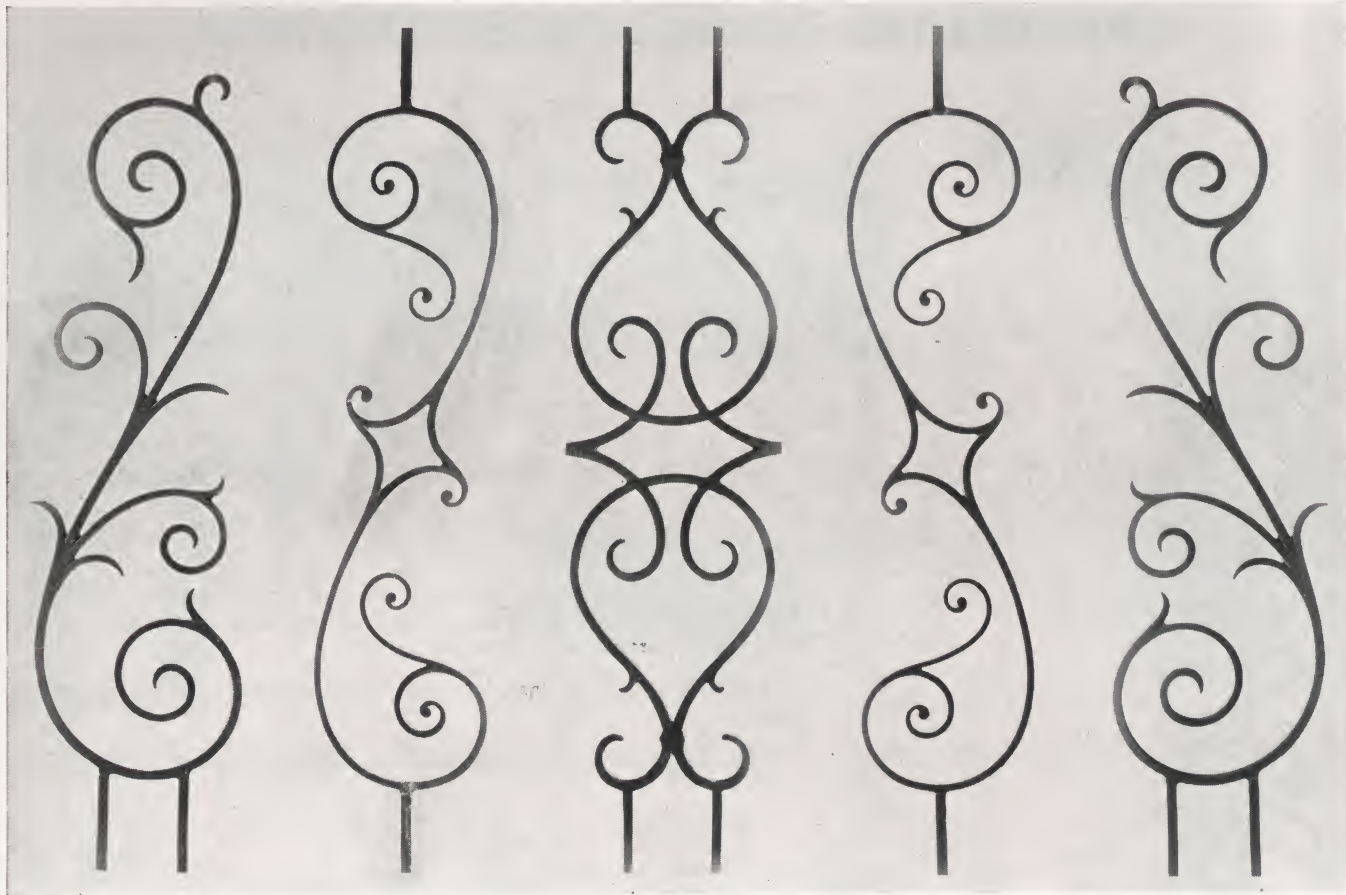


No. 536
Height 2'-9"

No. 537
Height 3'-1"


No. 538
Height 3'-1"

No. 537
Height 3'-1"


No. 538
Height 2'-9"

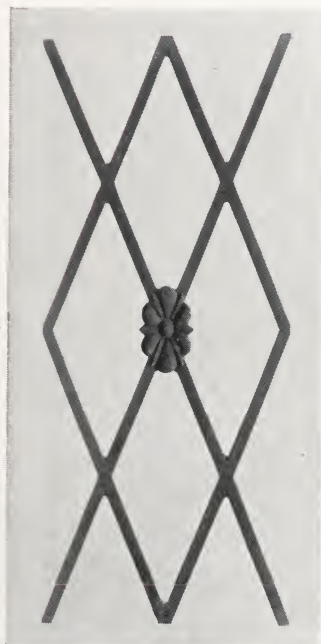

No. 540
Height 2'- $\frac{5}{8}"$
Width 10 $\frac{3}{8}"$

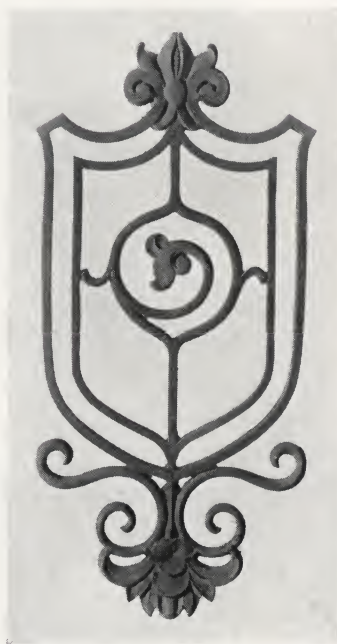

No. 521
Height 2'- $\frac{7}{8}"$
Width 1'

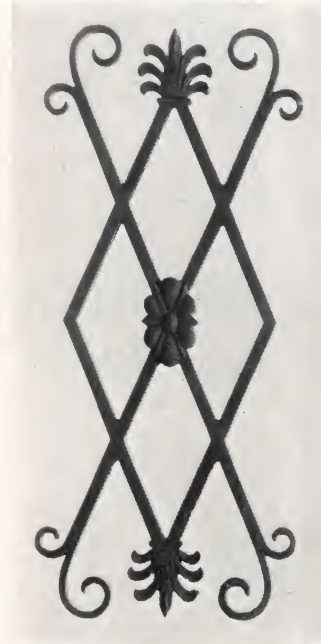

No. 541
Height 2'- $\frac{5}{8}"$
Width 10 $\frac{3}{8}"$

ORNAMENTAL DOUBLE FACED CASTINGS

SCALE $1\frac{1}{2}" = 1'-0"$




No. 519
Height: $2'-8\frac{5}{16}"$
Width: $7\frac{1}{16}"$



No. 518
Height: $2'-11\frac{3}{16}"$
Width: $7\frac{1}{16}"$



No. 517
Height: $2'-11\frac{1}{8}"$
Width: $7\frac{1}{16}"$

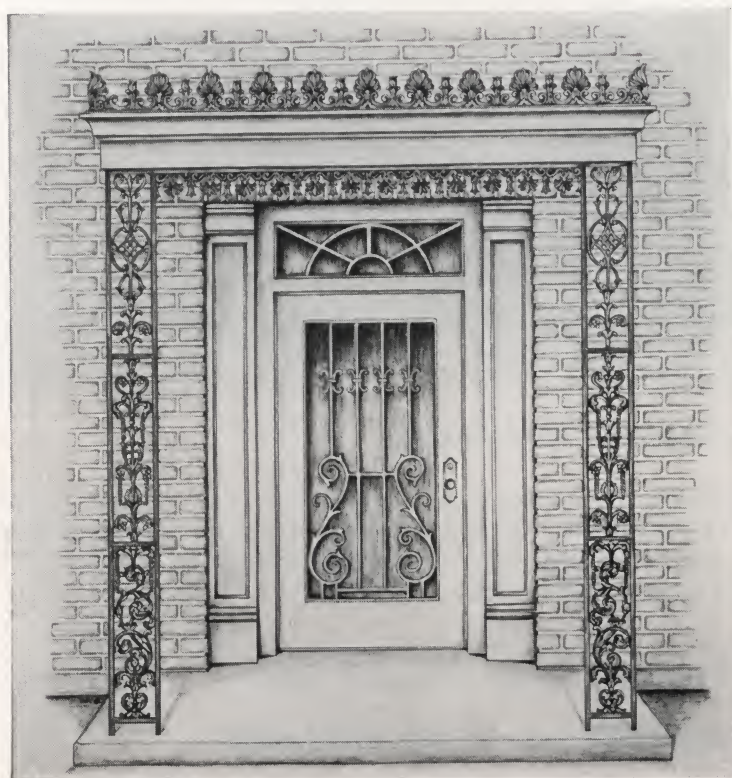


This series of Ornamental Double Faced Castings can be used in combinations or continuous designs. The overall width of all three motifs is the same, permitting the use of any combination in the same bar framing.

The illustration to the left shows all three castings used on one panel. The frieze and cresting are stock castings shown on page 40. Door grille design includes stock casting No. 538 and Collar No. 543.

CAST IRON CRESTINGS

For the Construction of Marquises, Awning Boxes, Show Cases, Etc.

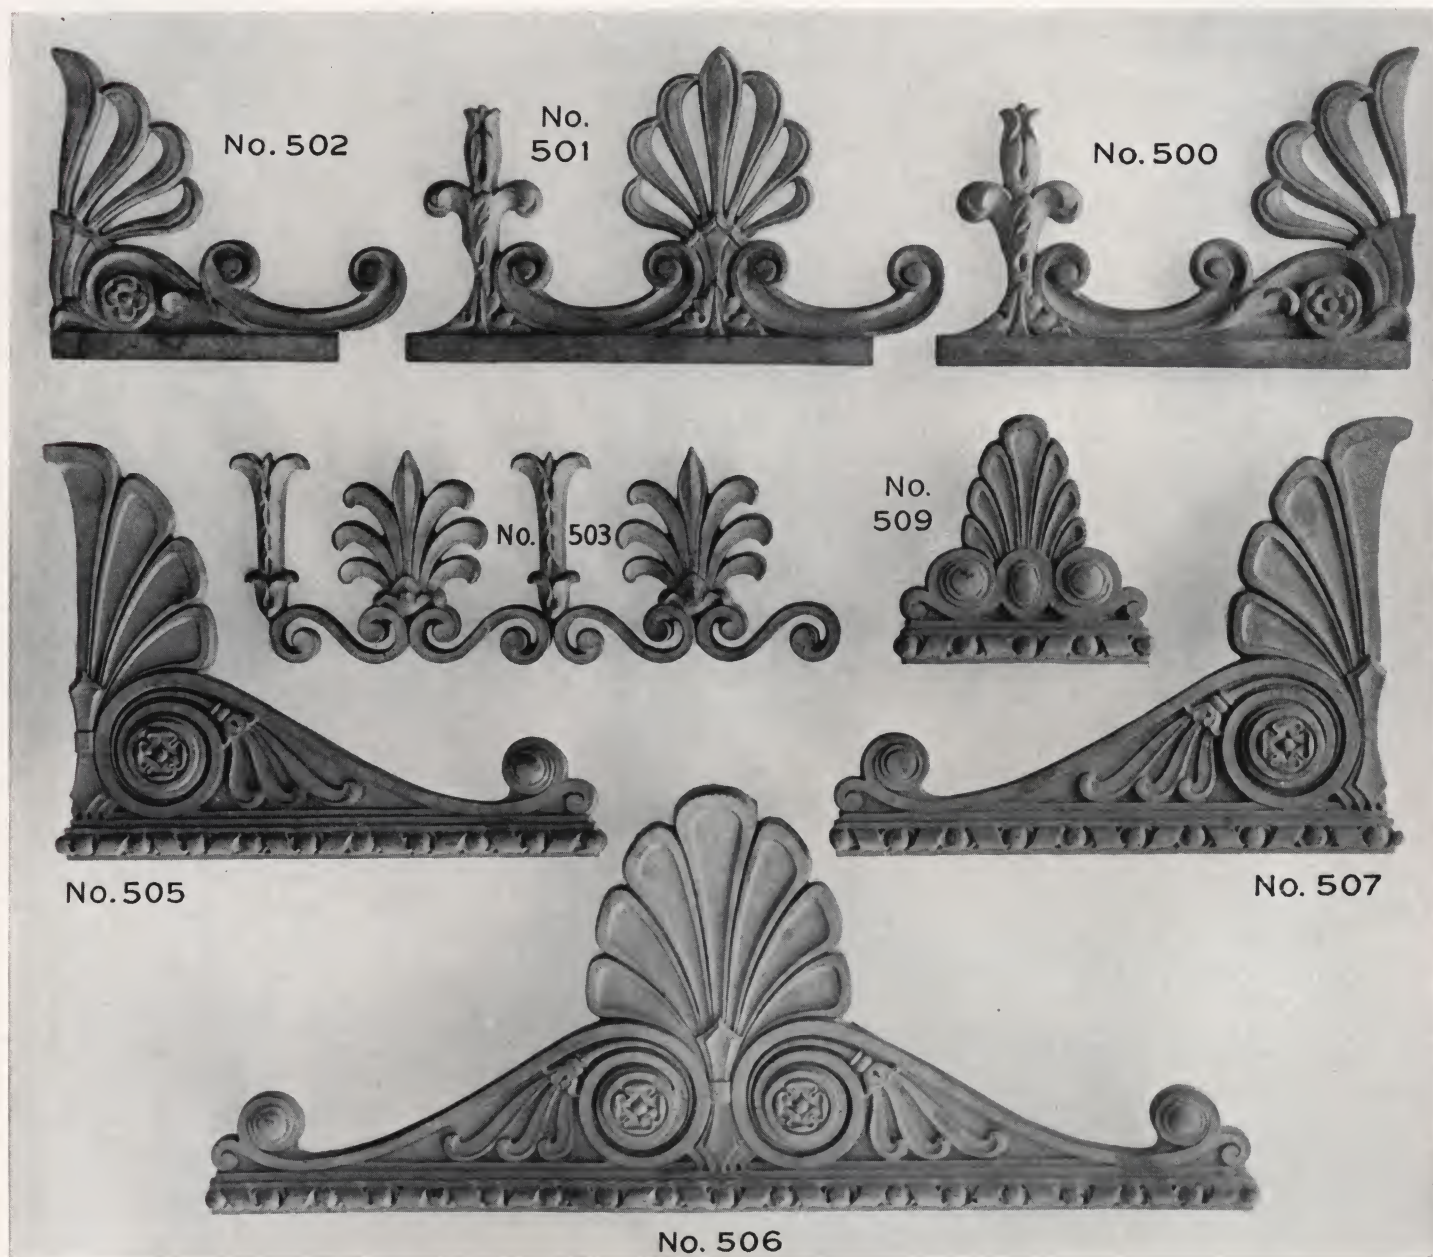

Illustrations shown are ONE-QUARTER actual size

Corners Nos. 500 and 502 and Corners Nos. 505 and 507 are cast on a mitre and will form a perfect right or left corner. Corners Nos. 505 and 507 and Centers Nos. 506 and 509 have lugs in back for fastening. Crestings Nos. 500, 501 and 502 as well as 503 form continuous interlocking designs. Crestings Nos. 505, 506, 507, 509 can be used as a continuous design or they may be spaced at intervals.

Our Cast Iron Crestings are a Finished Product of Superb Quality

NO PATTERNS

NO WAITING

NO FINISHING

MOULDINGS

FOR many years JULIUS BLUM Mouldings have been used extensively in architectural and ornamental metal work and industrial use.

The large selection shown in the following pages is available from our stock and we are constantly adding to this line new shapes to meet changing requirements.

"JULIUS BLUM" Mouldings have been accepted in many standard forms of construction and fabrication.

The many uses for which these Mouldings are designed include:

Stair Mouldings—stringer or plate type, Facias, Cornices, Mullions, Risers and Treads, Store Fronts, Partitions, Door Jambs, Bank Screens, Ceiling Lights, Elevator Cabs, Skylights, Panels, Trim, Corners, Windows, Doors, Glass Construction, and ornamentation of many products.


Mouldings are rolled true and smooth of soft steel, with sharp lines, and are furnished in long straight bars in lengths of about 20 ft.

These Shapes are designed for strength as well as appearance and are of ample size and weight to facilitate drilling, tapping, countersinking and welding. They may also be bent, formed or forged.


Illustrations are full size and approximate weights are listed.

STAIR STRINGER AND FACIA CONSTRUCTIONS


Channel Stringer with Moulding
No. 4305 top and bottom.

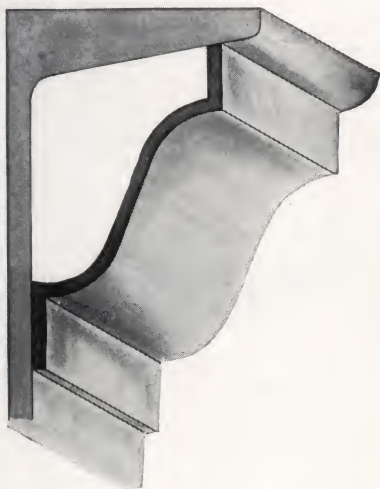


Special 10" or 12"
Stringer Channel.
Moulding No. 4303
top and bottom.

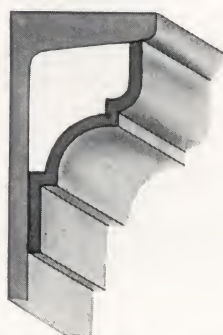


Channel Stringer with Mould-
ing No. 4315 top and bottom.

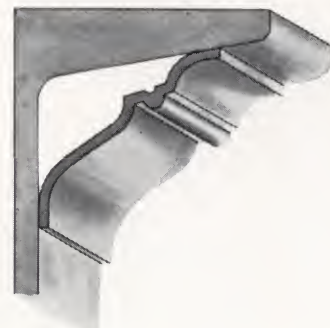

BUILT-UP CORNICES

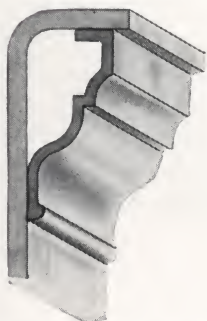


Bent Plate Channel
Stringer with
Moulding No. 4159
top and bottom.

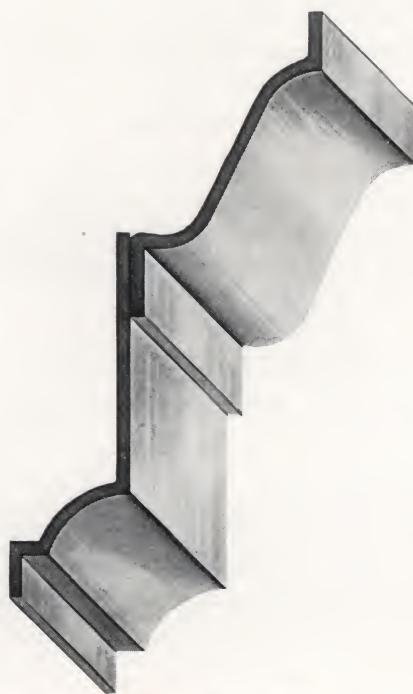

Showing Mouldings
Nos. 4360 and 4356




Showing Mouldings
Nos. 4173 and 4302

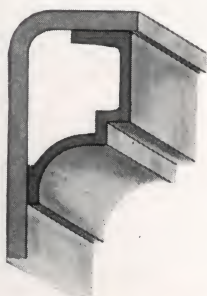


Bent Plate Channel Stringer
with Moulding No. 4173 top
and bottom.

We attempt to show a few methods of constructing large cornices or facias by means of Rolled Steel Mouldings and standard shapes. An unlimited variety of designs, plain or ornamented, may be assembled in like manner.


No. 4300

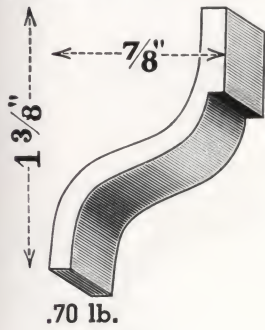


No. 4304

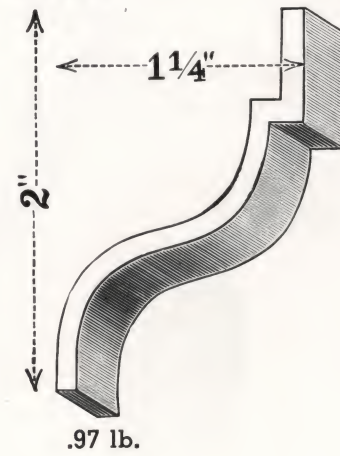


No. 4305

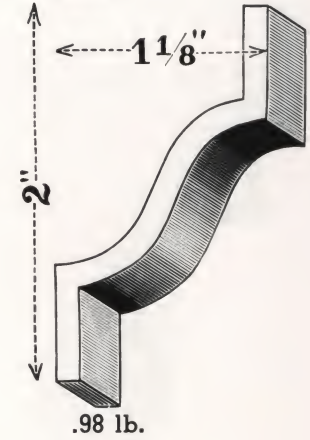


No. 4303

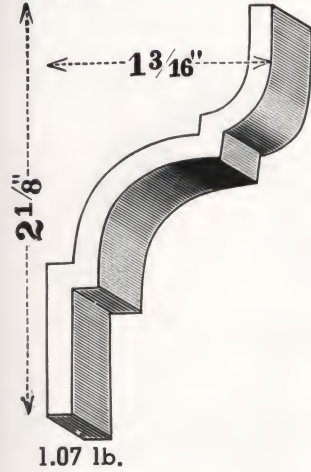


No. 4312

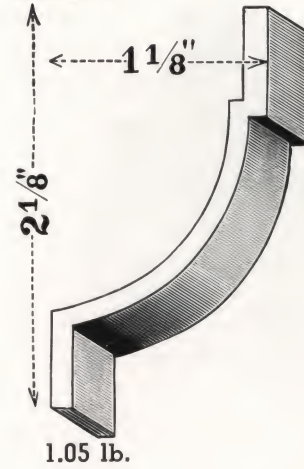


No. 4302

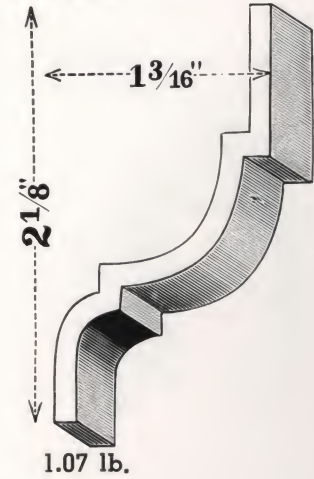


No. 4309

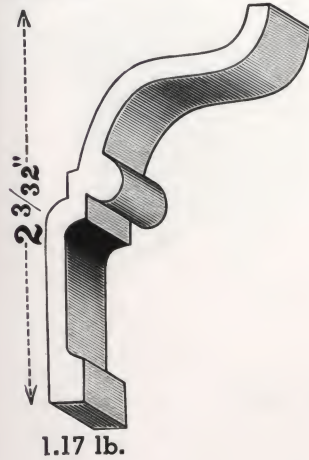

No. 4307

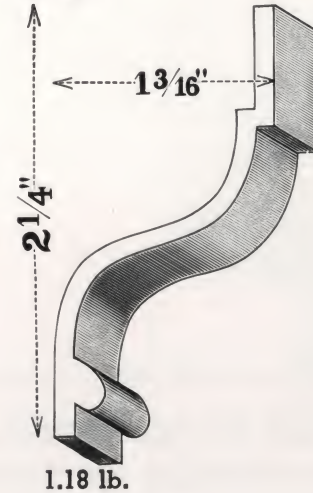

No. 4173

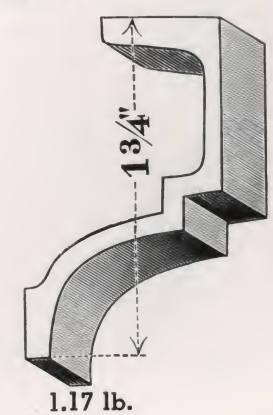

STAIR STRINGER AND FACIA CONSTRUCTIONS

Plate Wall Stringer with
Moulding No. 4226.

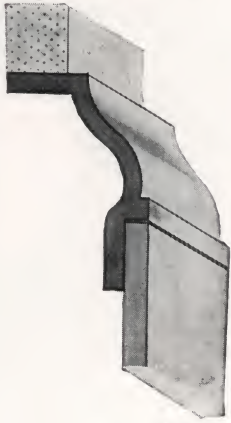


Plate Wall Stringer with
Moulding No. 4225.

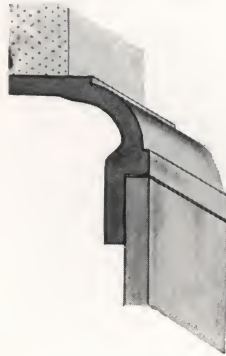


Plate Wall Stringer with
Moulding No. 4310.


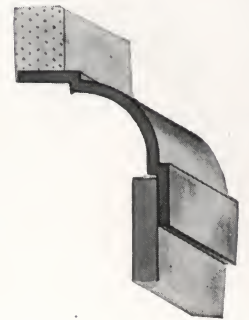


Plate Wall Stringer with
Moulding No. 4610.

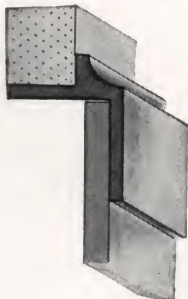

Channel Wall Stringer with
Moulding No. 4130.



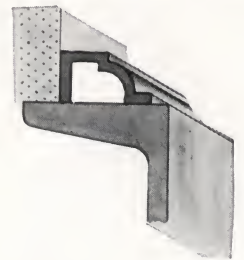


Plate Facia with Chan-
nel No. 4760 on top.
Moulding No. 4450
used for plaster soffit
stop.

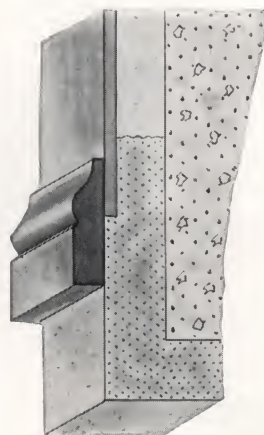


Wainscoting or Plate Wall
Stringer with Moulding
No. 4280.

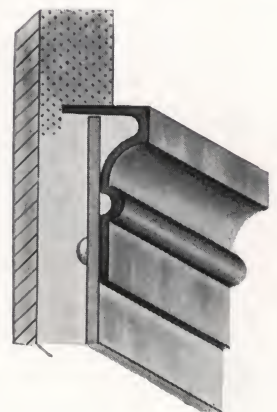

Details shown are ONE-HALF actual size


SUITABLE MOULDINGS, PLAIN OR ORNAMENTED, MAY BE USED FOR
PANELING STRINGERS AND FACIAS

No. 4173

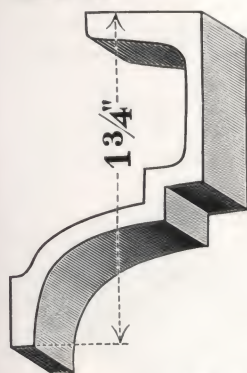


1.17 lb.

No. 4159

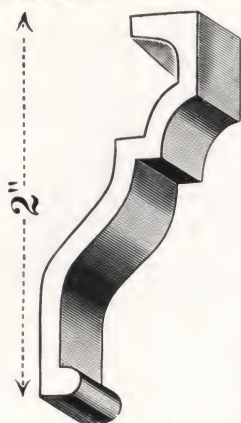


1.00 lb.

No. 4280

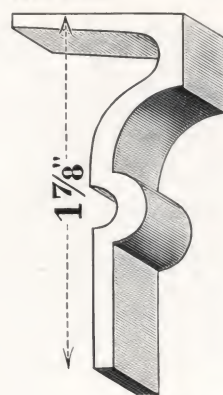

1.10 lb.


No. 4265

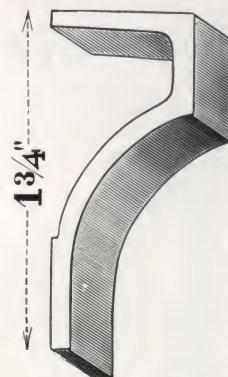

.93 lb.


WALL STRING MOULDINGS

No. 4226

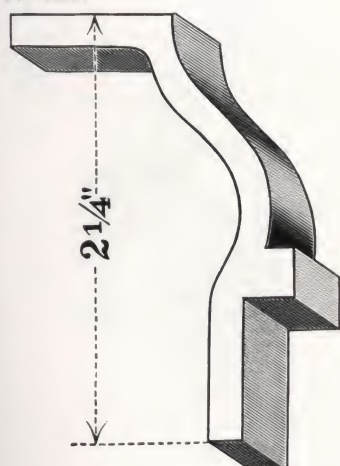


1.90 lb.

No. 4225

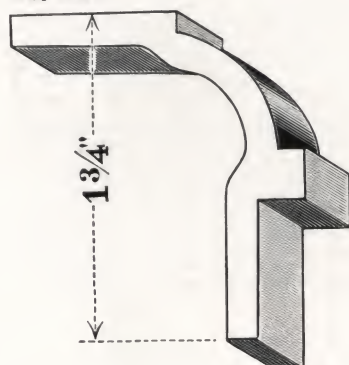


1.70 lb.

No. 4310

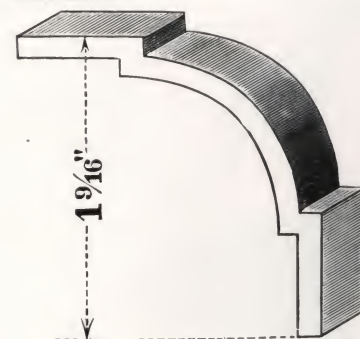


1.00 lb.

No. 4610

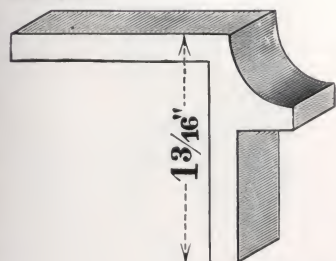


1.15 lb.

No. 4317

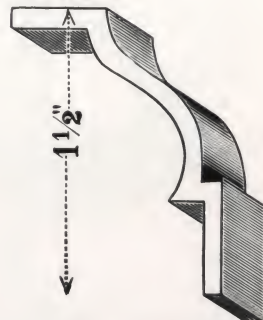

.90 lb.

No. 4240

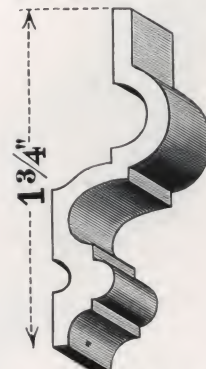

.84 lb.

STAIR STRINGER AND FACIA CONSTRUCTIONS

Plate Stringer with Moulding
No. 5172 top and bottom.



Plate Stringer with Moulding
No. 4153 top and bottom.

Panels Moulding No. 4257. Plas-
ter Soffit Stop Moulding No. 4471.



Plate Stringer with Moulding
No. 4172 top and bottom.

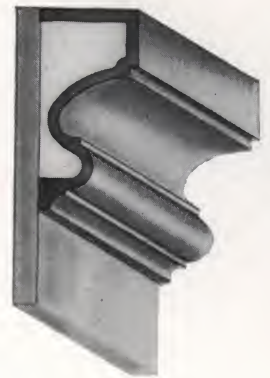


Plate Stringer with Moulding
No. 4243 on top and
No. 4241 on bottom.

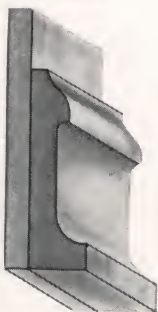
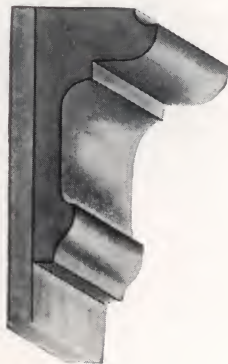


Plate Stringer with Moulding
No. 4154 top and bottom.


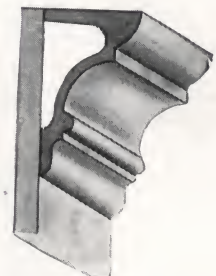



Plate Stringer with Moulding
No. 4152 top and bottom.

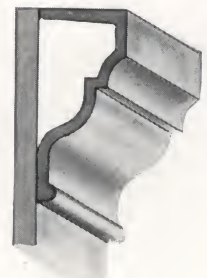

Details shown are ONE-HALF actual size


SUITABLE MOULDINGS, PLAIN OR ORNAMENTED, MAY BE USED
FOR PANELING STRINGERS AND FACIAS

No. 4157

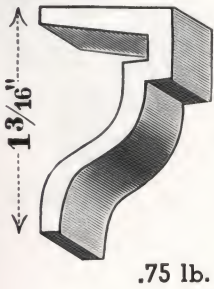


.75 lb.

No. 4151

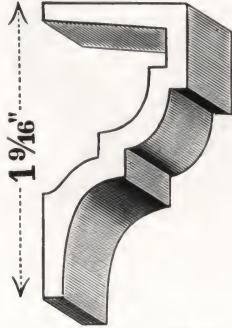


.93 lb.

No. 5156

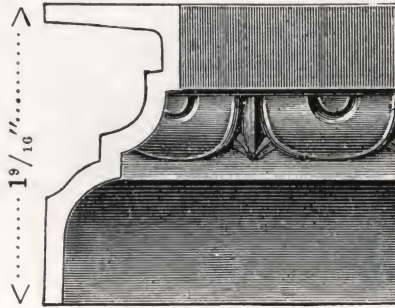


1.05 lb.

No. 4156

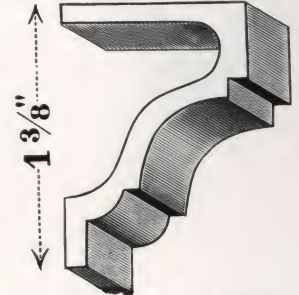


1.00 lb.

No. 4152

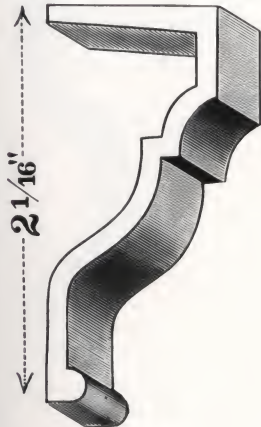


1.35 lb.

No. 5157

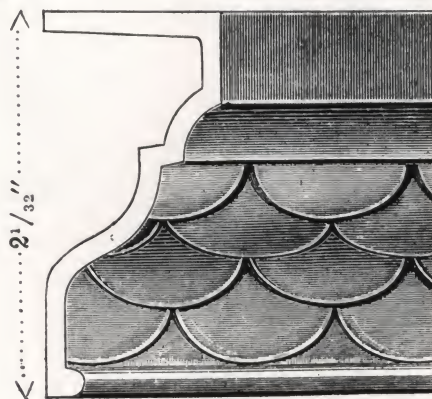


1.40 lb.

No. 4153

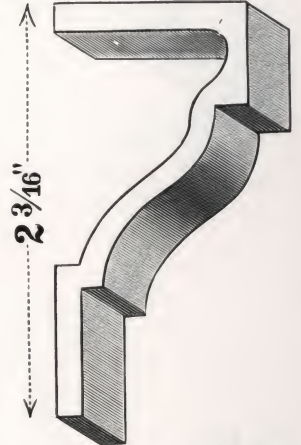


1.33 lb.

No. 4172

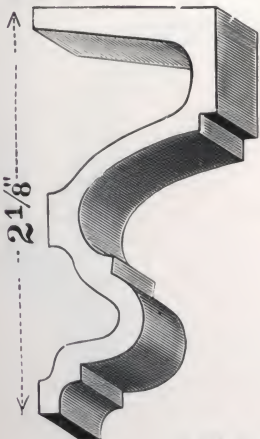


1.70 lb.

No. 4171

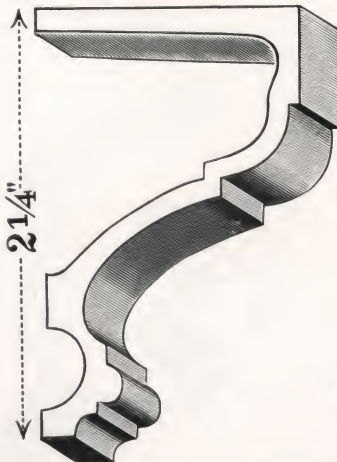


2.08 lb.

No. 4170

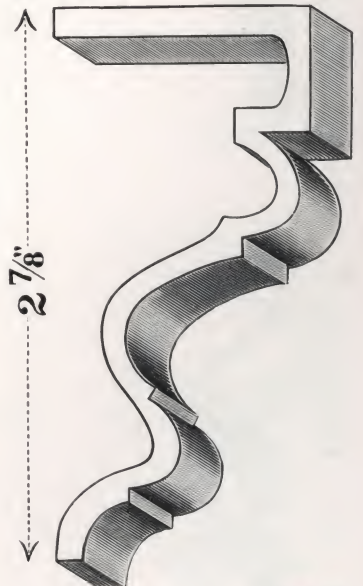


2.54 lb.

No. 4133




.59 lb.

No. 4130




.60 lb.

No. 4132




.65 lb.

No. 4131



.60 lb.

No. 4134



.70 lb.

No. 4203




.58 lb.

No. 4142



.53 lb.

No. 4141

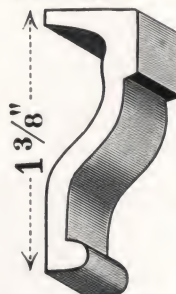


.74 lb.

No. 4140




1.17 lb.

No. 4144



.92 lb.

No. 4126




.60 lb.

No. 4201



.40 lb.

No. 4200




.37 lb.

No. 4208




.31 lb.

No. 4255

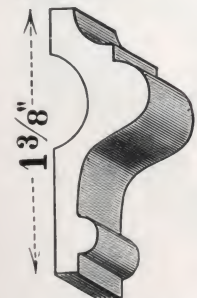

.98 lb.

No. 4254



.62 lb.

No. 4250




.29 lb.

No. 4143




.64 lb.

No. 4204




.60 lb.


No. 4150

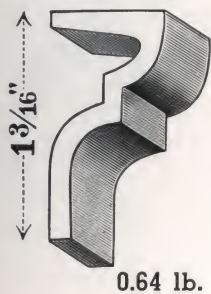


No. 5155

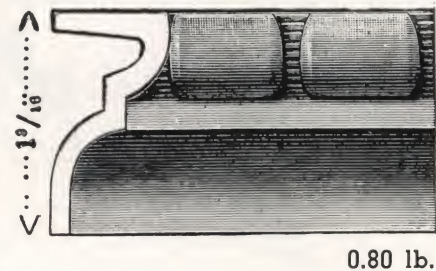


No. 4154

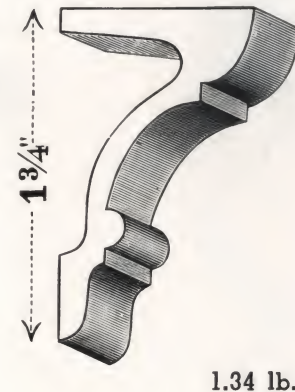


No. 4155

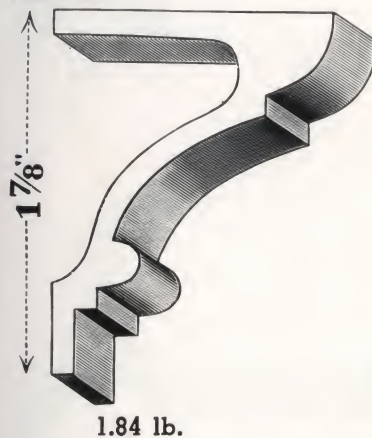


No. 4161

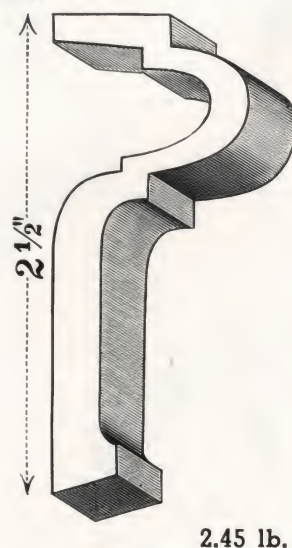


No. 4162

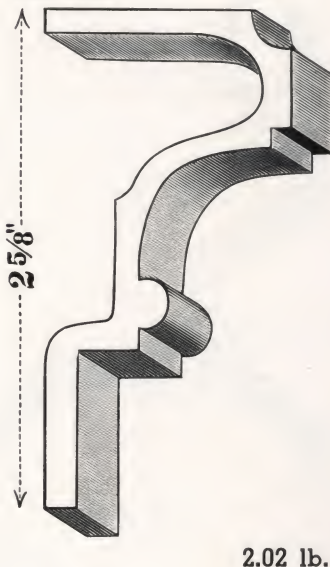


No. 4243

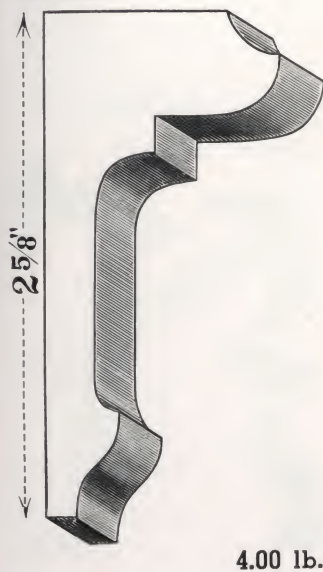


No. 4242

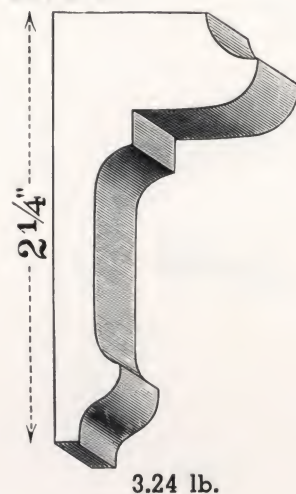

No. 4241

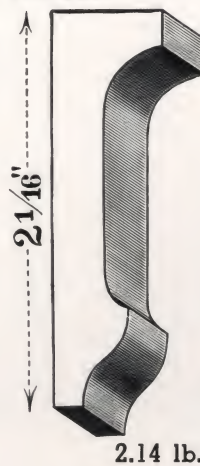

No. 4163

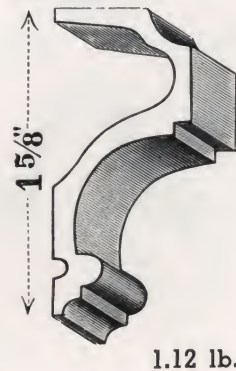


No. 4404




No. 4401



No. 4402



No. 4403




No. 4482




No. 4491




No. 4432




No. 4421




No. 4492




No. 4423

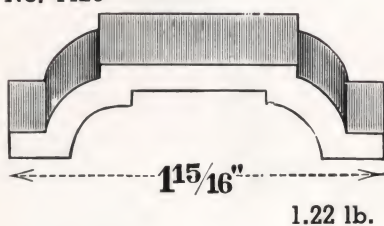

No. 4130




No. 4442

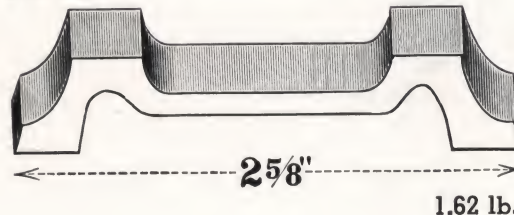


Moulding No. 4423 will form a perfect mitre with Moulding No. 4130.


No. 4489











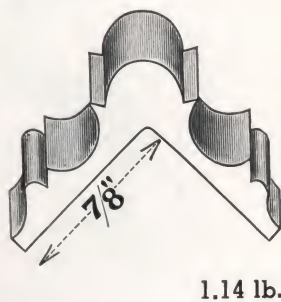


No. 4495

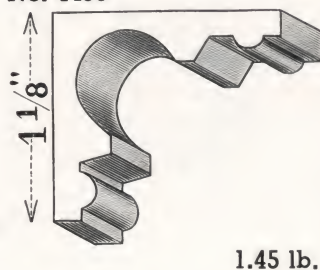


No. 4496

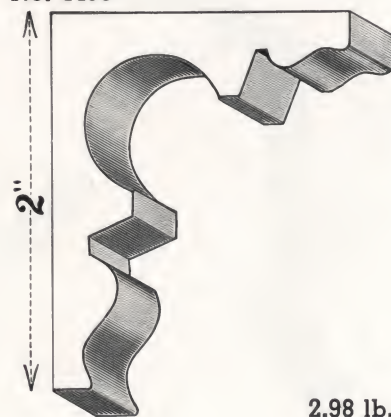


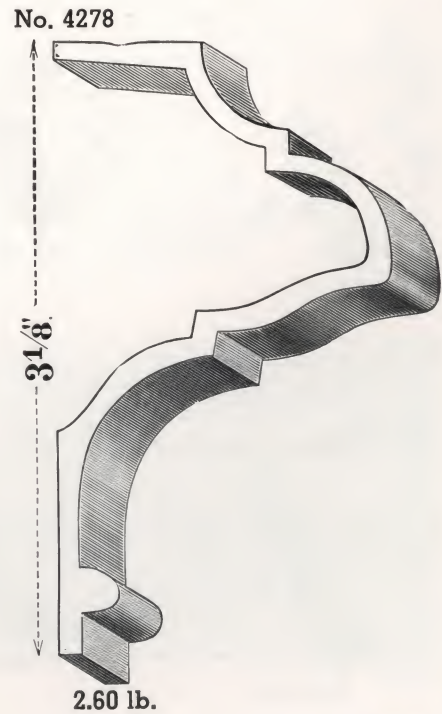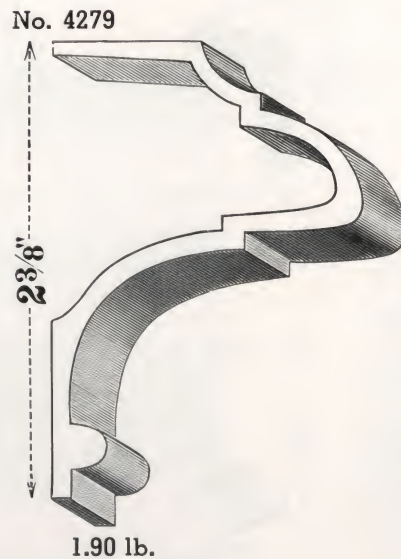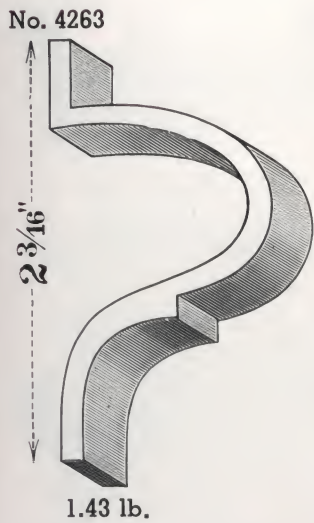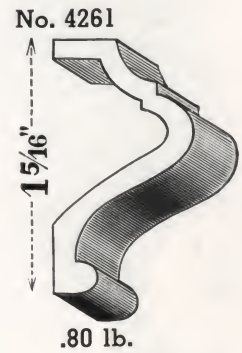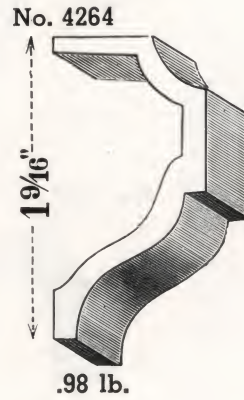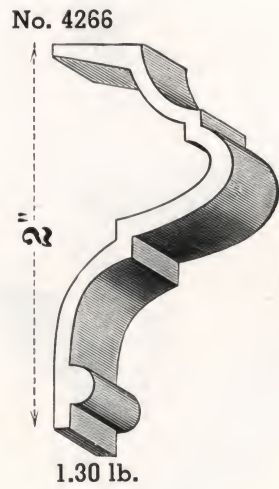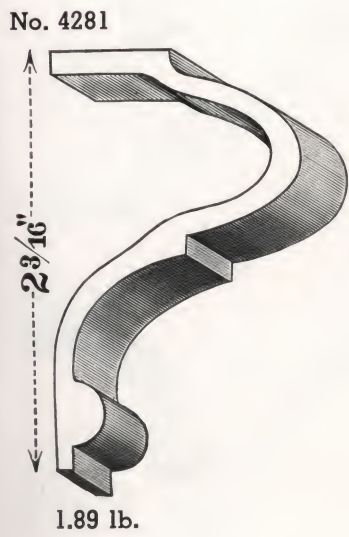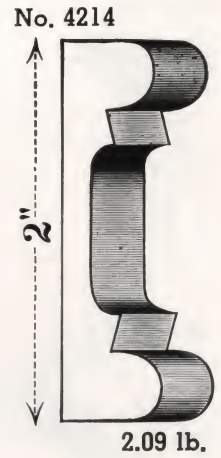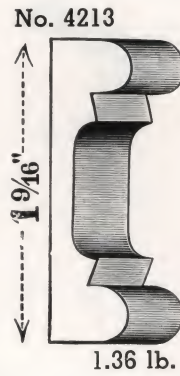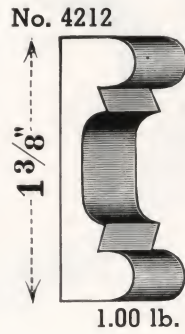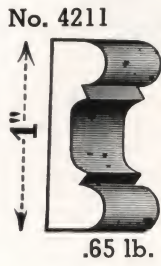


No. 4101




No. 4102




No. 4103




No. 4110




No. 4104




No. 4108

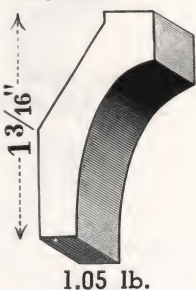


No. 4107

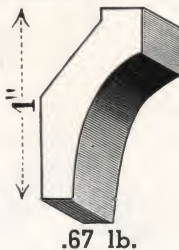


No. 4106




No. 4105



No. 4120

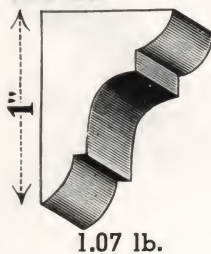


No. 4480




No. 4119



No. 4109

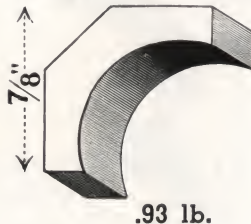

No. 4257




No. 4258



No. 4121




No. 4486




No. 4485



No. 4256

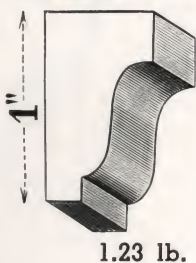


No. 4451



No. 4473




No. 4125




No. 4123




No. 4320

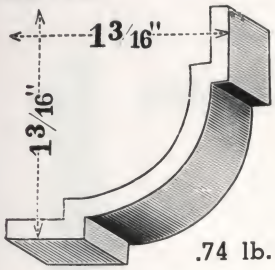


No. 4310

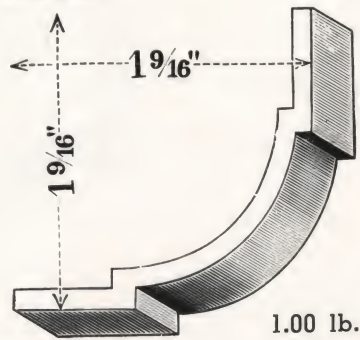


No. 4330

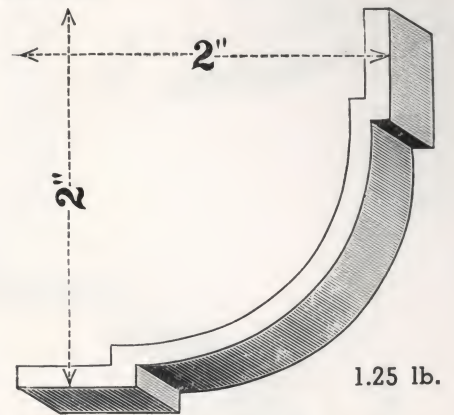


No. 4322

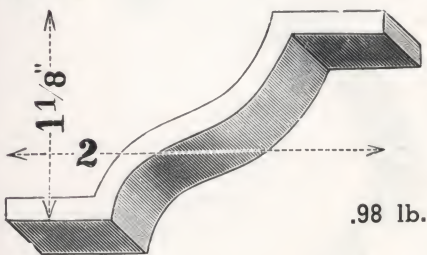



No. 4323

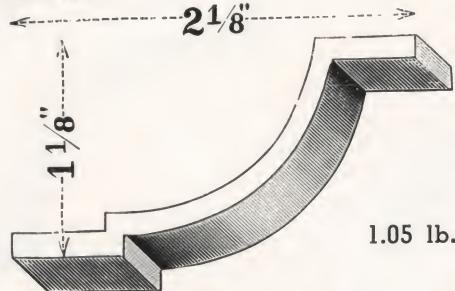

No. 4315

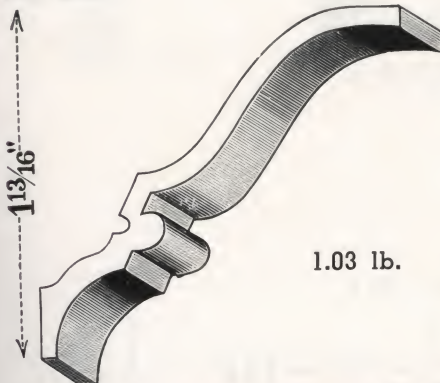


No. 4316

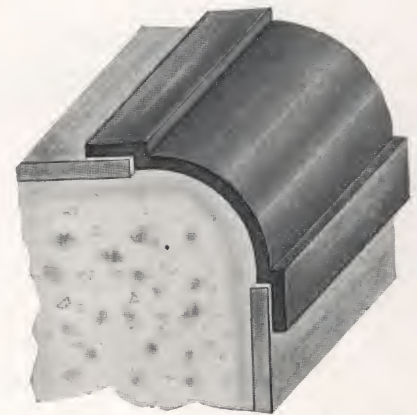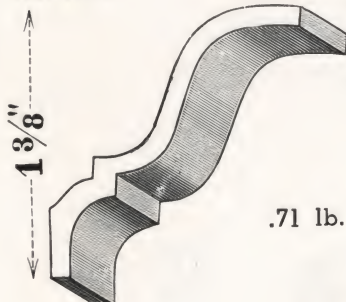

Detail showing Mouldings Nos. 4310, 4320, 4330 used for Corner Guards.


No. 4317

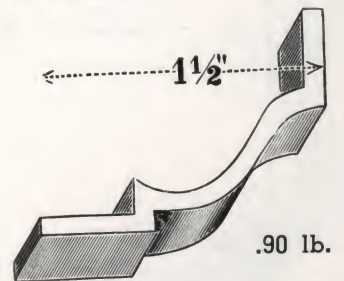


No. 5150




No. 5151

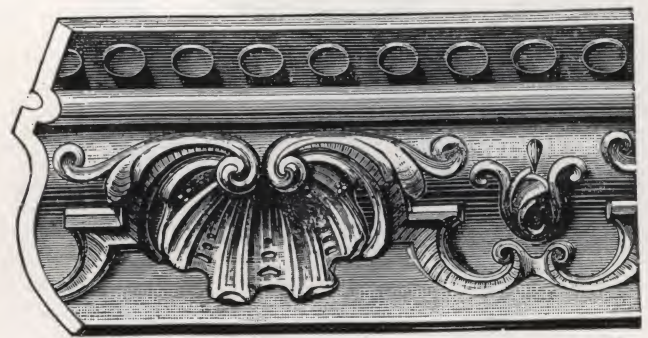


No. 4350

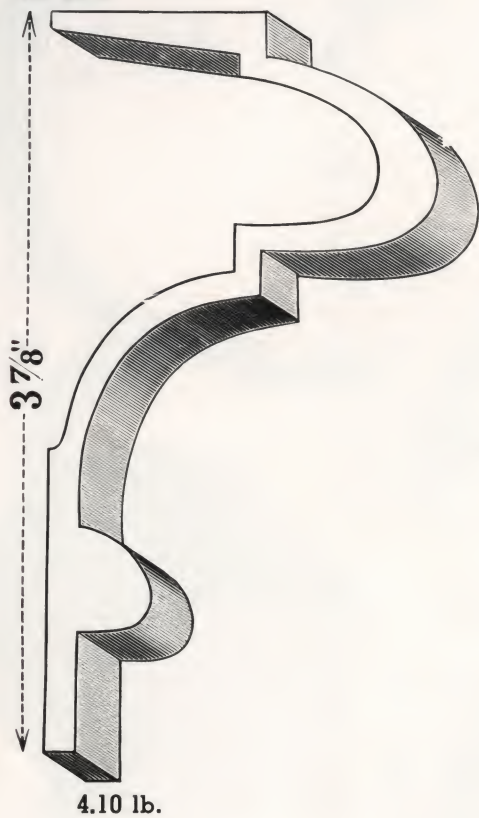


No. 4285






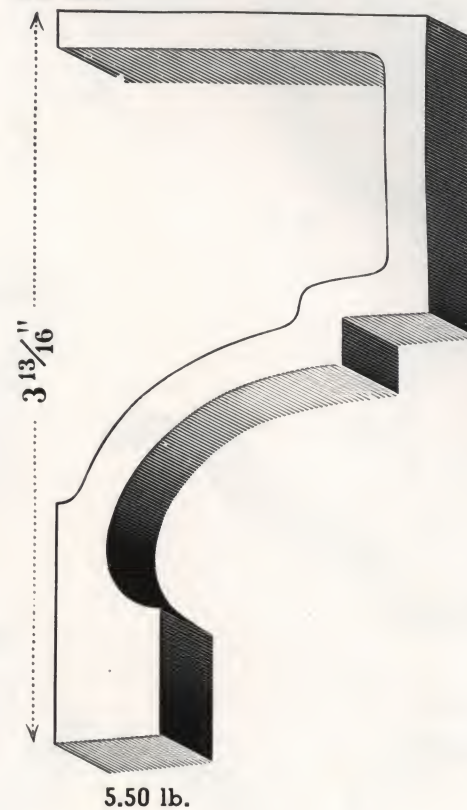


No. 4355

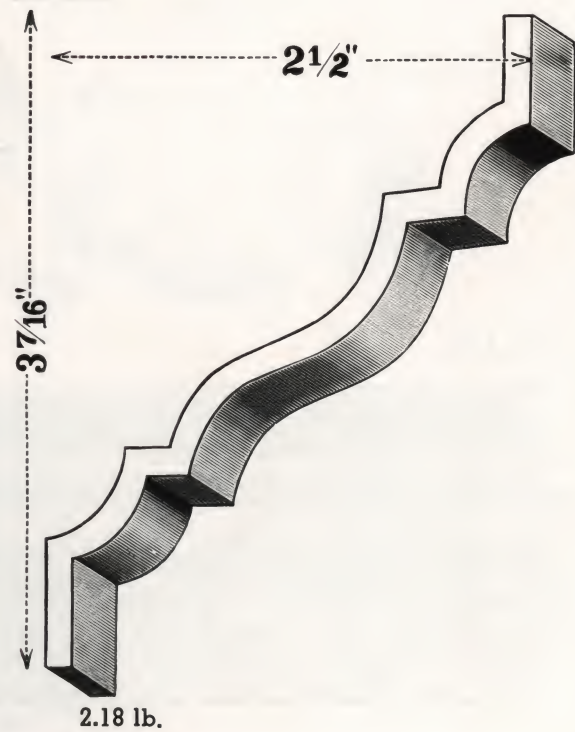

No. 4354

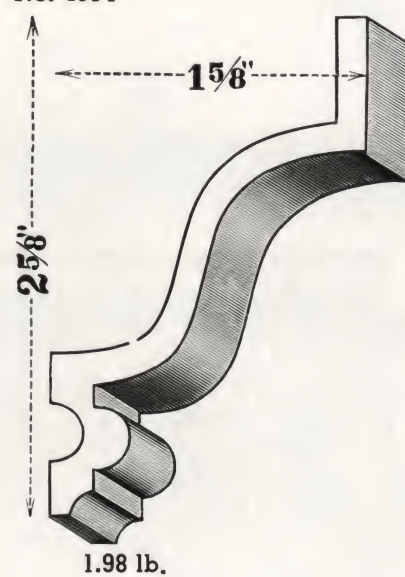


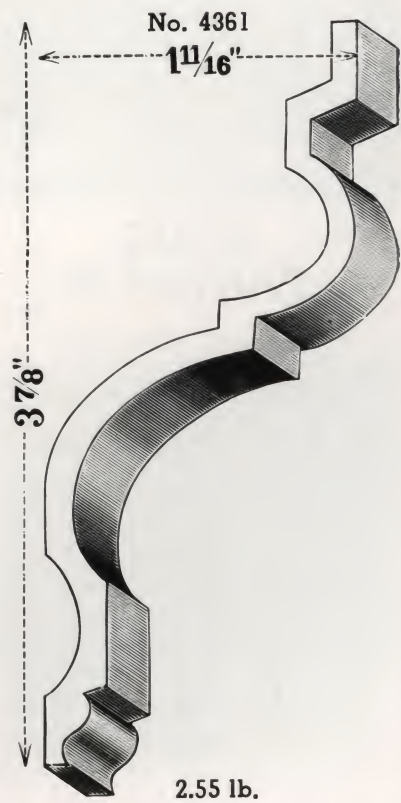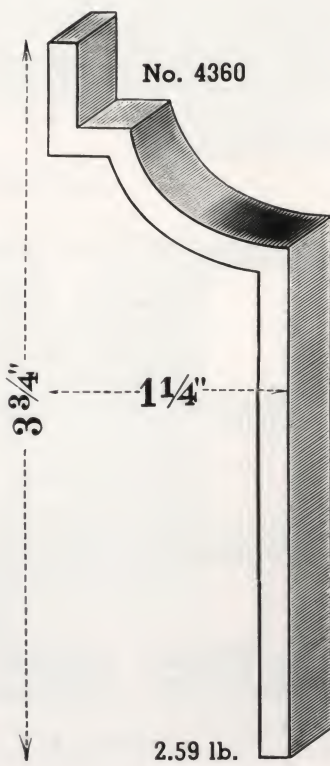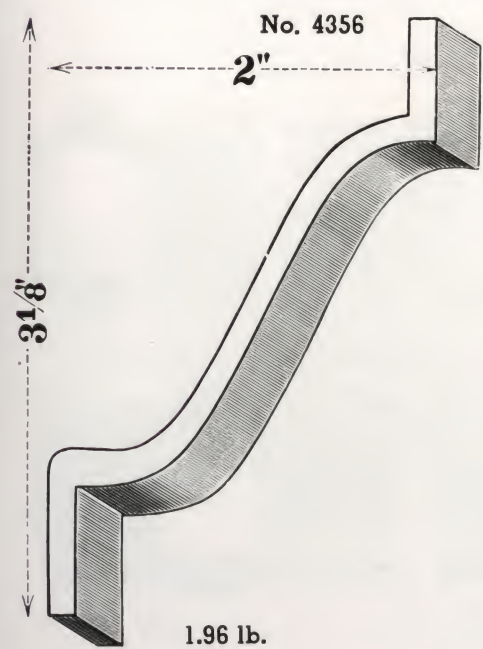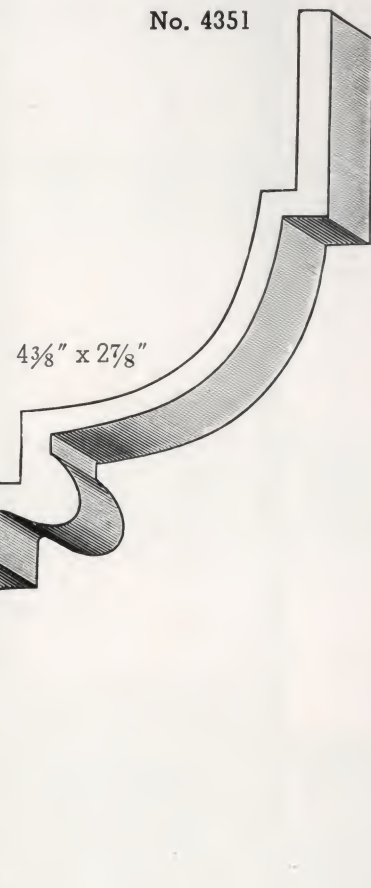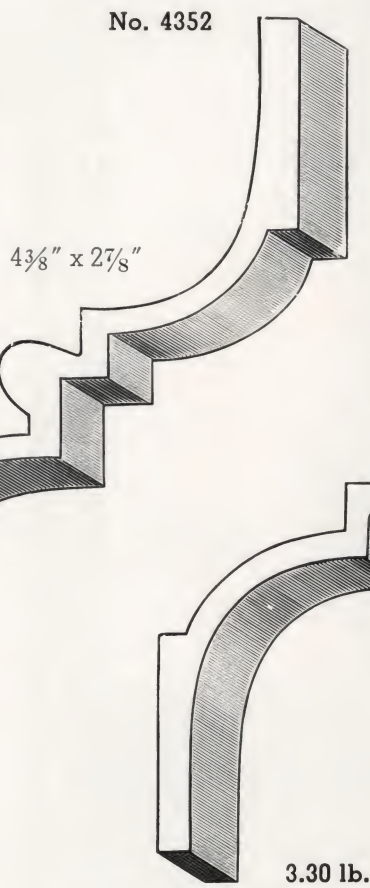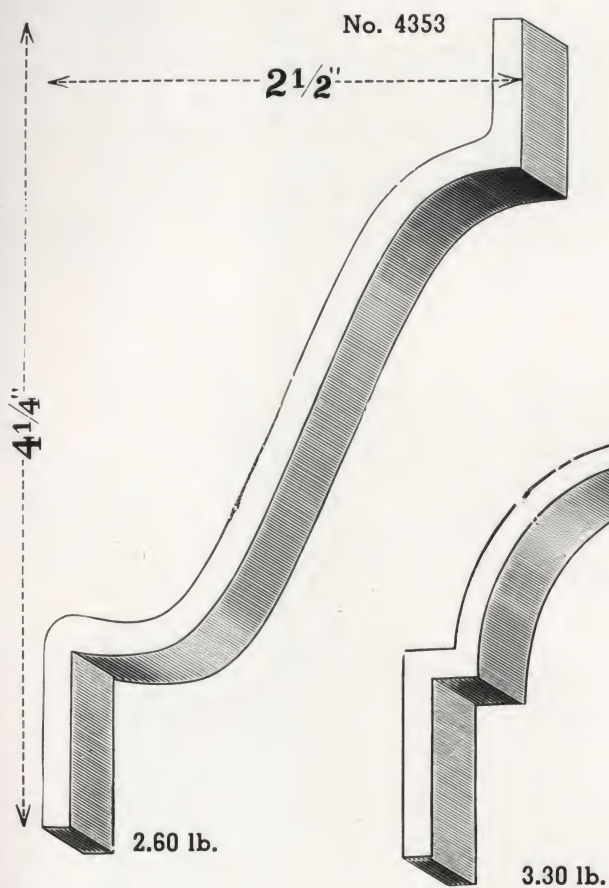




STEEL PARTITION


Front view of intersection

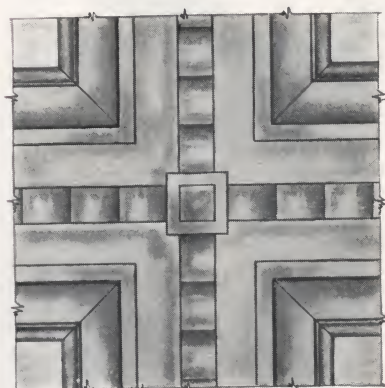

Plan Section from wall to door jamb

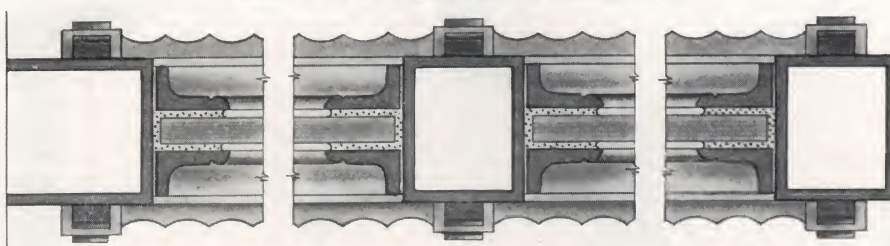


Cross Section from floor through sheet metal base to glass frame

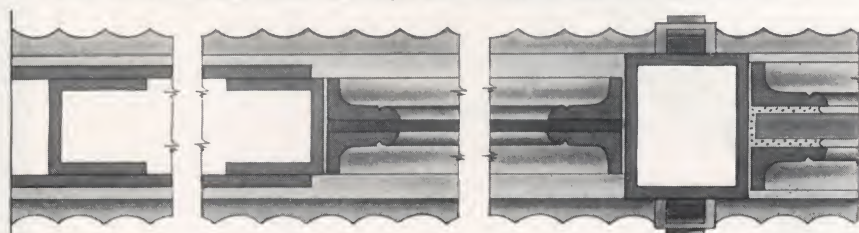


Details shown are ONE-HALF actual size

MODERNISTIC DESIGNS


No. 5300 $\frac{3}{8}$ " wide x $\frac{1}{4}$ " high

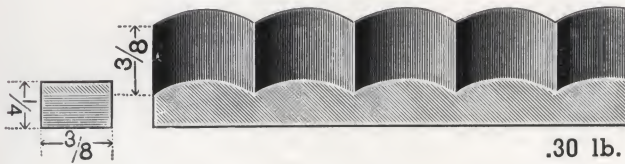



No. 5301 $\frac{3}{8}$ " wide x $\frac{1}{4}$ " high

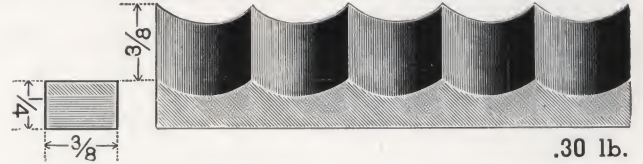

No. 5303 $\frac{5}{8}$ " wide x $\frac{9}{16}$ " high

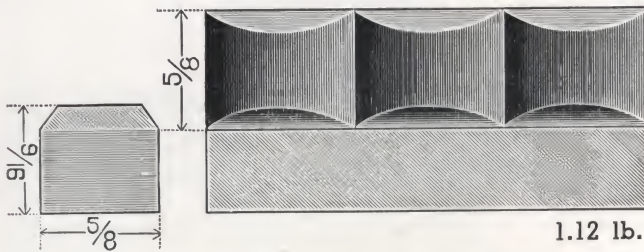

No. 5302 $\frac{1}{2}$ " wide x $\frac{1}{4}$ " high

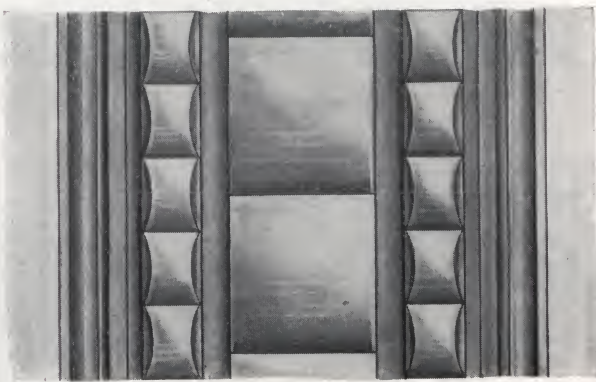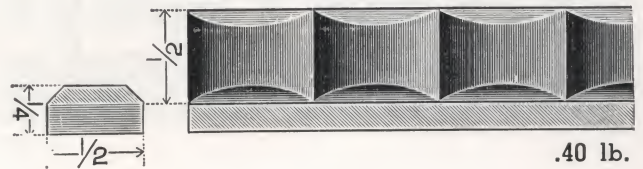


MULLION

Two Channels and Plates forming square or rectangular Mullion with moulded offsets.


Mouldings Nos. 5303 and 5308 used for trim on face member.

No. 5305

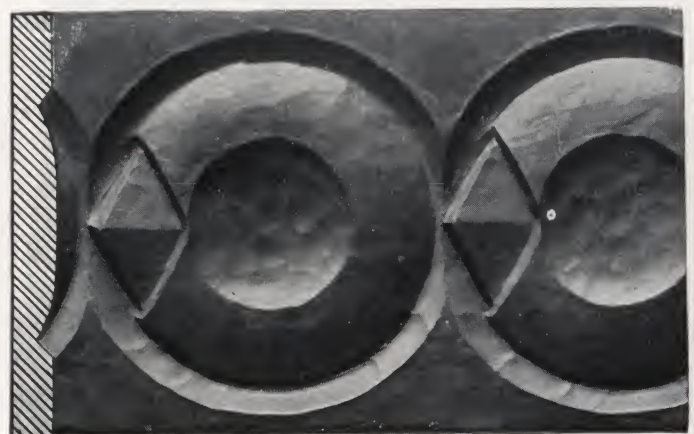


1.46 lb.

No. 5308 $1\frac{1}{2}$ " wide x $\frac{5}{16}$ " high

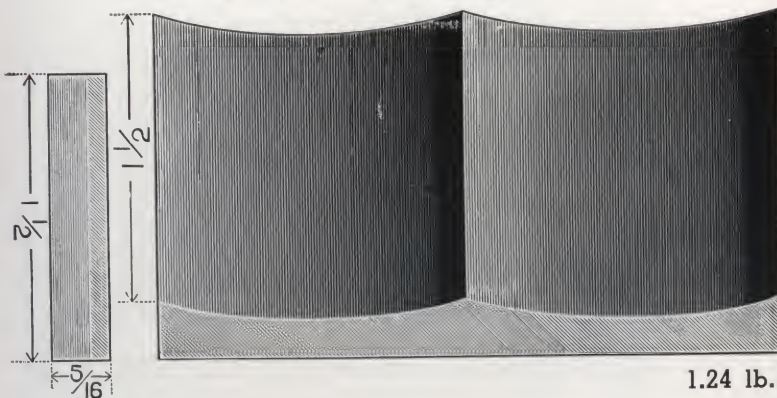


No. 5306

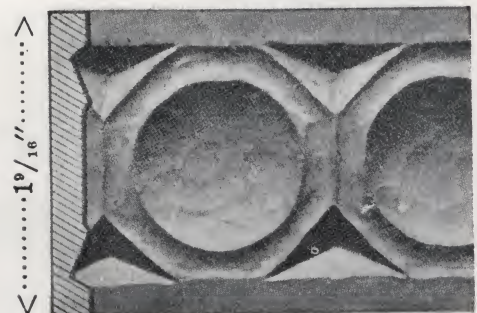


.96 lb.

On account of the simplicity of their design, these mouldings harmonize with plain and angular members used for iron work in the modern manner. These mouldings also lend themselves advantageously to ornamental work showing a combination of iron with brass, bronze, aluminum, etc.


No. 5070

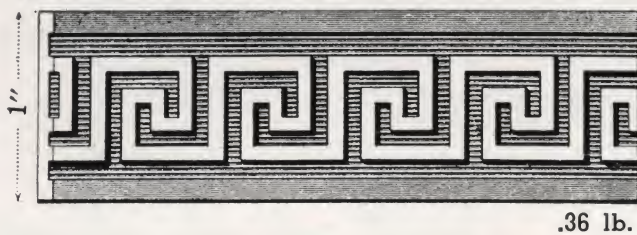


No. 5071

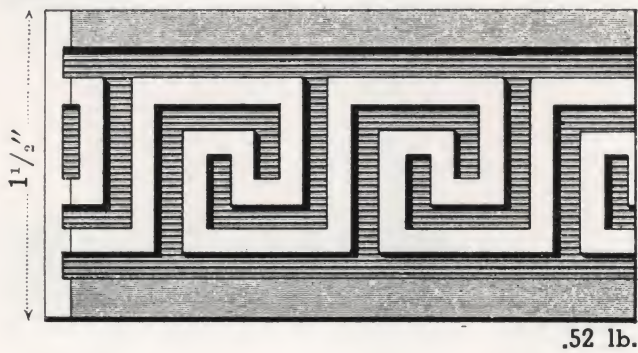


No. 5072

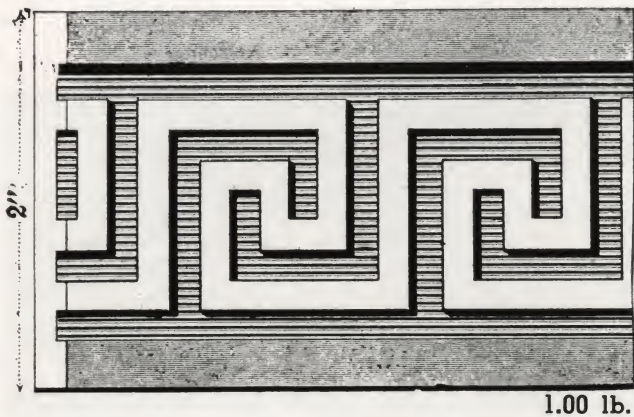


No. 5074

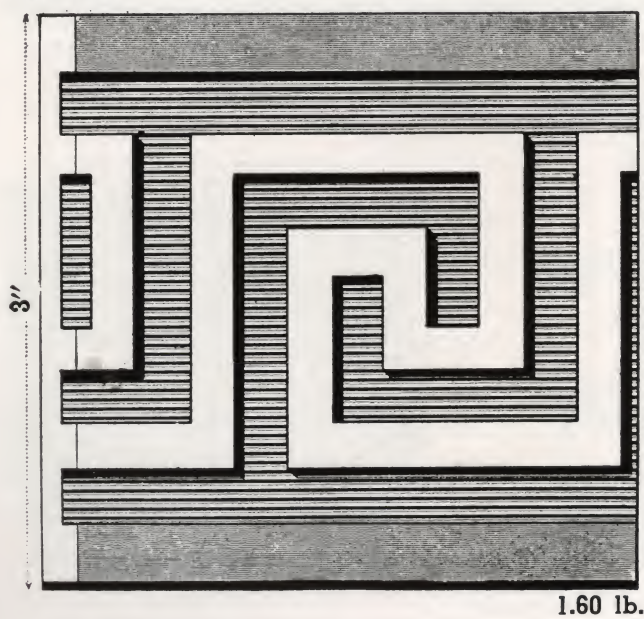


No. 5061

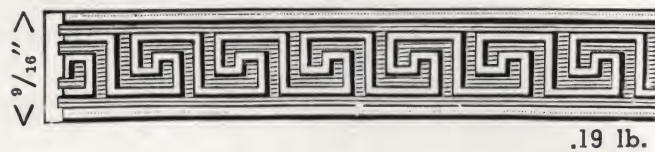


No. 5060

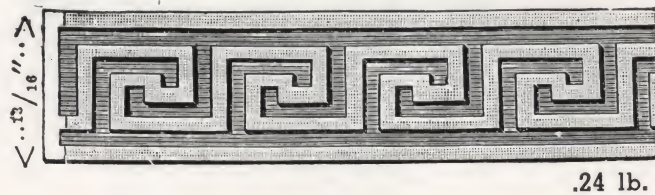


No. 5105

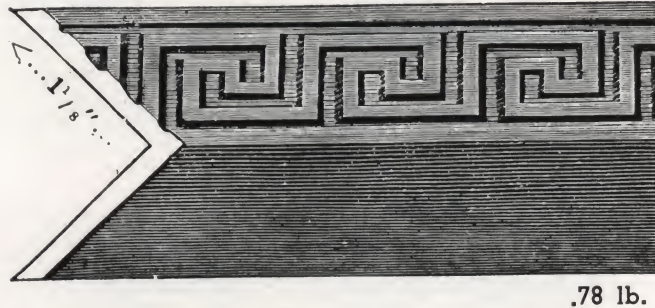


No. 5101

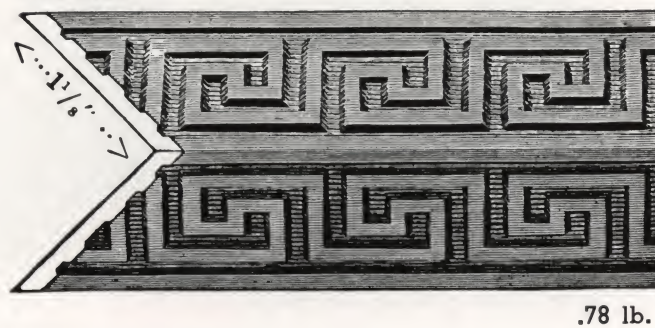


No. 5073

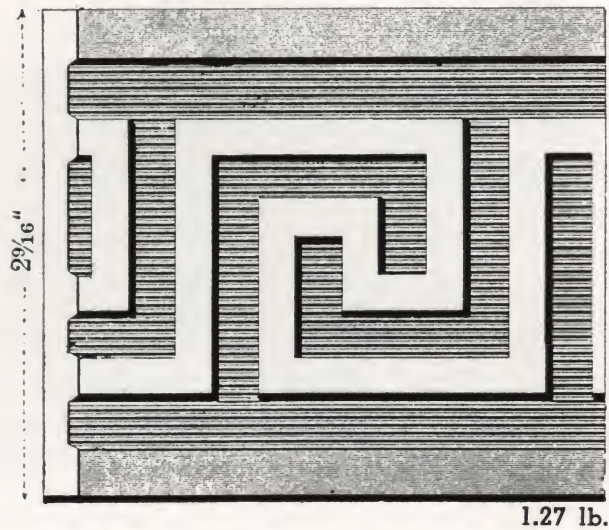


No. 5106

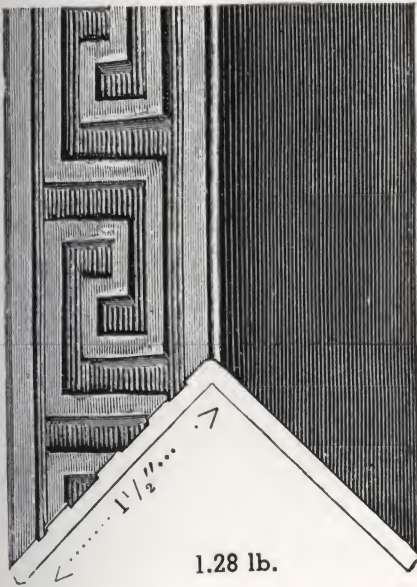



No. 5107

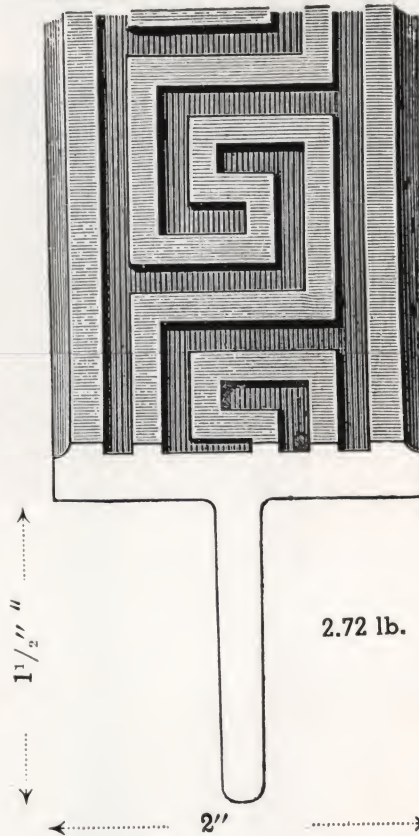


No. 5108

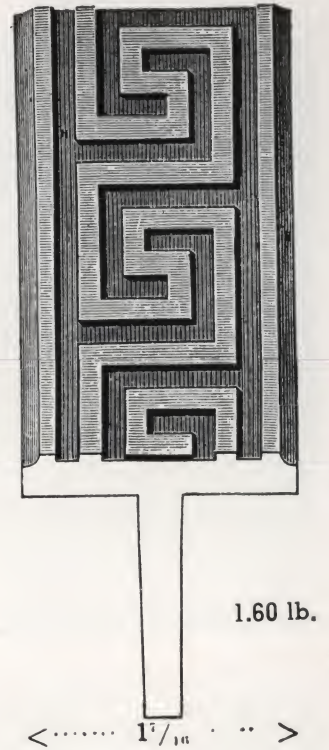


Showing Store Front or similar Glass Construction using (left) Mouldings Nos. 5102 and 5107 with Nos. 4320 and 4105 for glass stop. (right) Angle No. 4648 with Moulding No. 5052. Angle No. 4647 and Moulding No. 4105 used for glass stop.

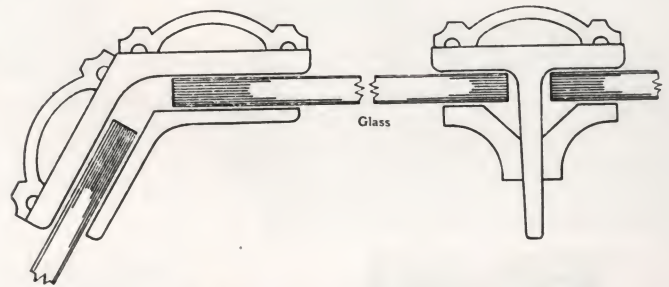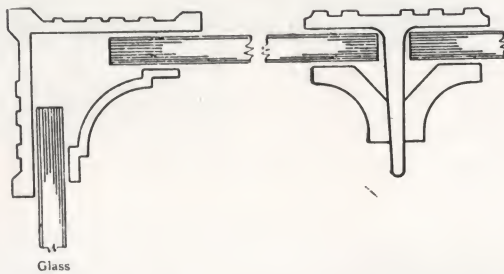



No. 5100

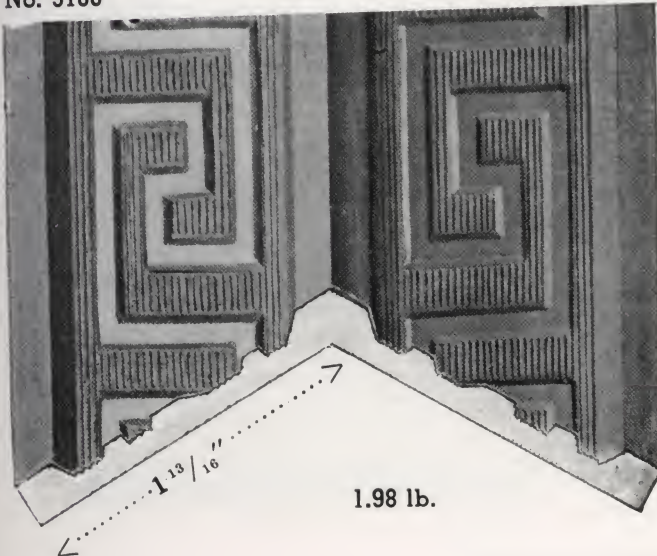

No. 5102

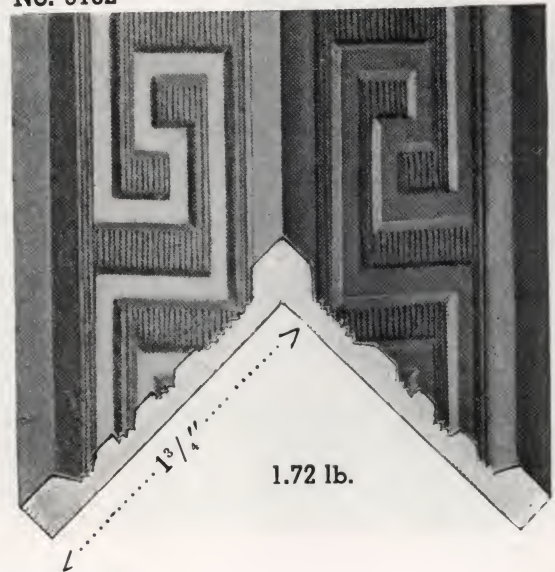

DIRECTORY OR SIGN BOARD

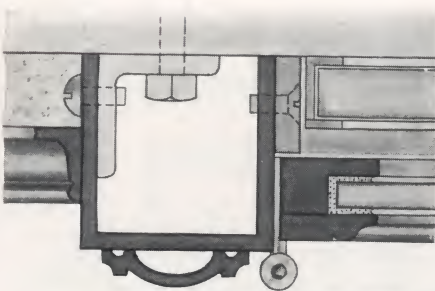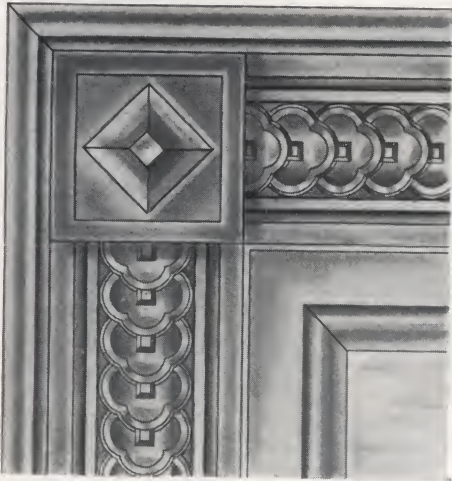

Specification: *Frame*—Channel No. 4752 trimmed with Moulding No. 5051. *Corner*—Square plate with Forged Nail No. 64 in center. Moulding No. 4121 used as plaster stop. *Hinged Glass Frame*—Moulding No. 4460 with No. 4450.

The board is fastened to the wall by angle knees, concealed inside the channel frame.




MULLION

Specification: Hot Rolled 4" x 4" x $\frac{1}{8}$ " Square Steel Tubing trimmed with Mouldings Nos. 5201 and 4258. Glass frame Moulding No. 4256 (stationary). For swinging glass frames, use Mouldings Nos. 4625, 4626, 4627, 4628, 4629.

For other Mullion Constructions, see Page Nos. 56, 74, 106.


Details shown are ONE-HALF actual size

No. 5050

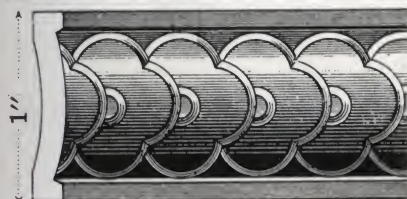


.49 lb.

No. 5051

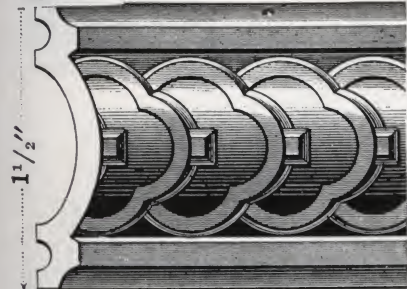


.93 lb.

No. 5052

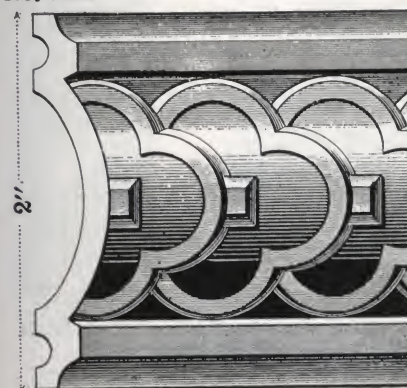


1.38 lb.

No. 5054

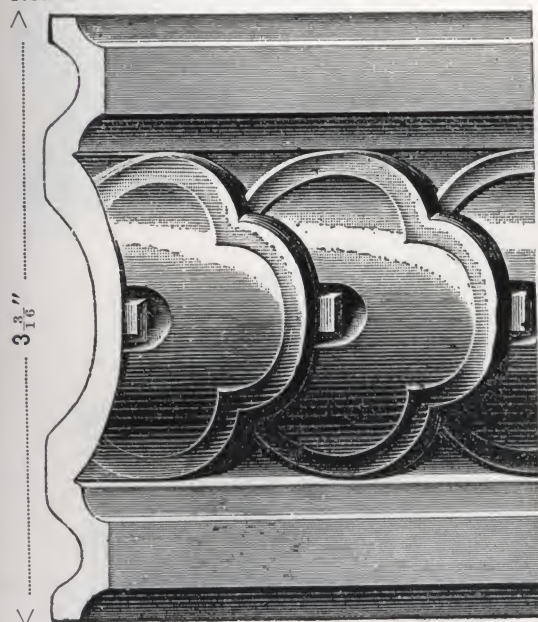


2.00 lb.

No. 5214

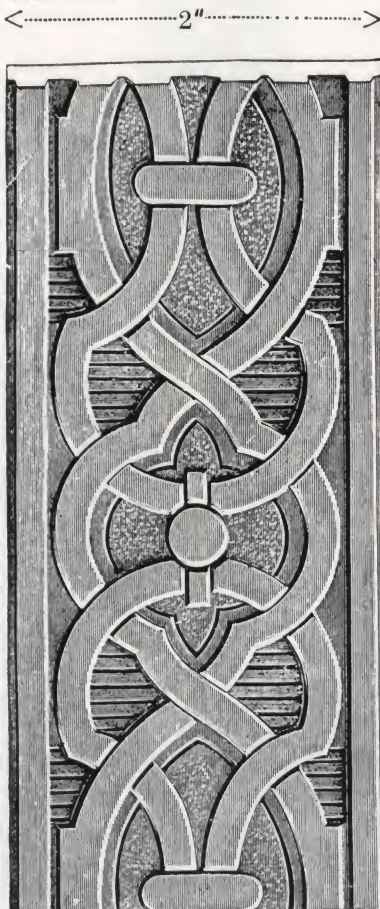


.64 lb.

No. 5063

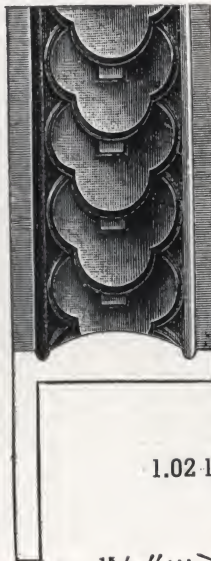


1.02 lb.

No. 5002

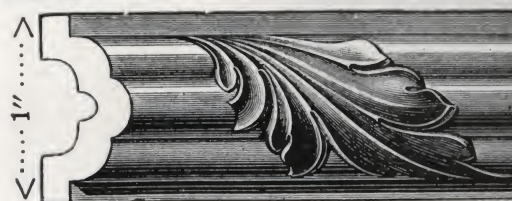


.57 lb.

No. 5003

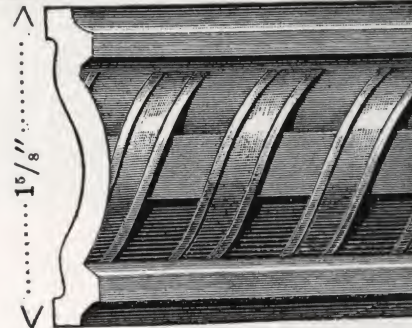


1.11 lb.

No. 5005














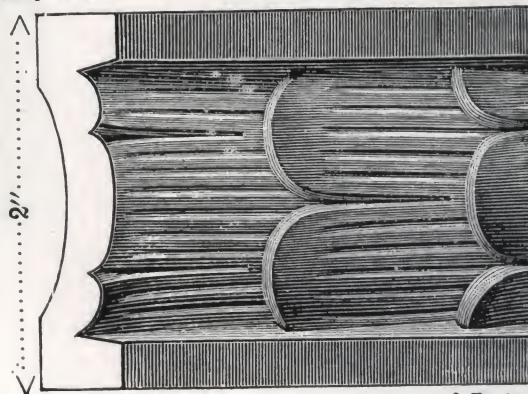


1.75 lb.


No. 5053

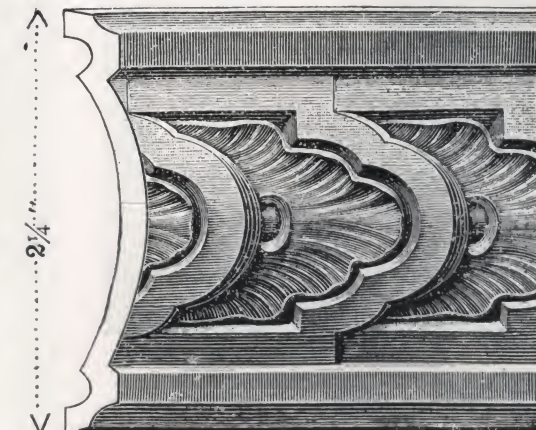

1.50 lb.

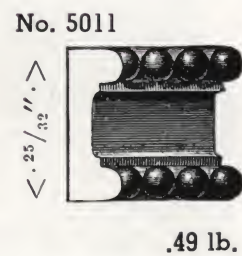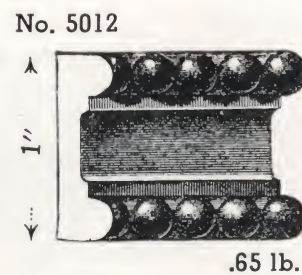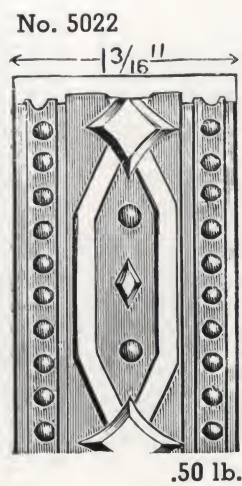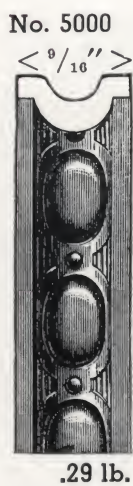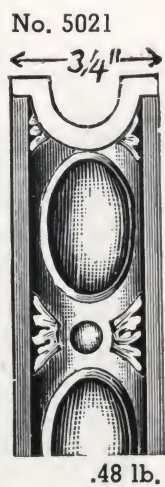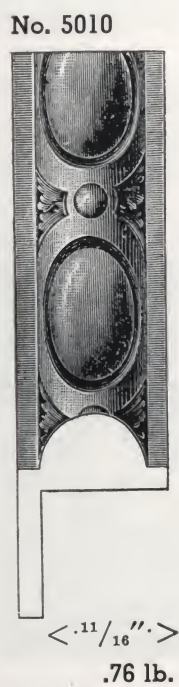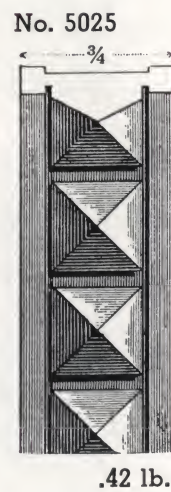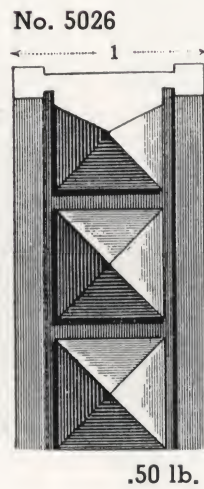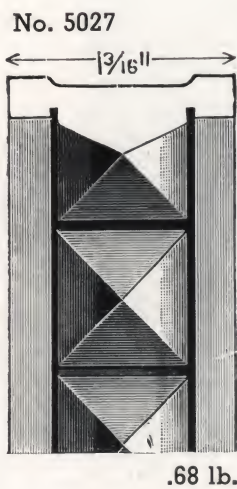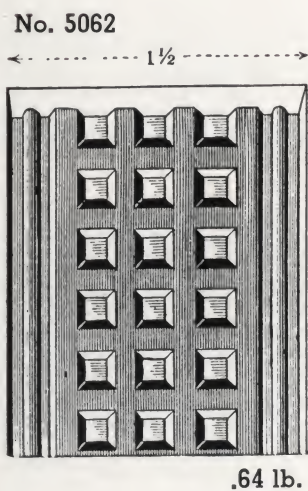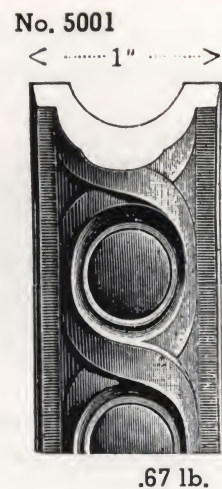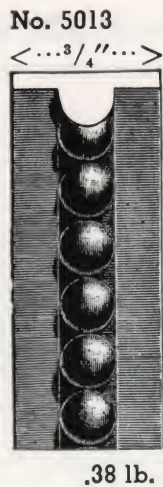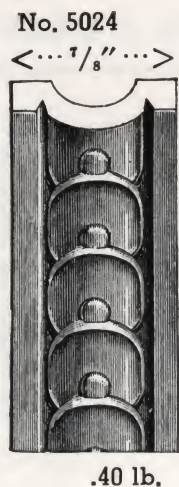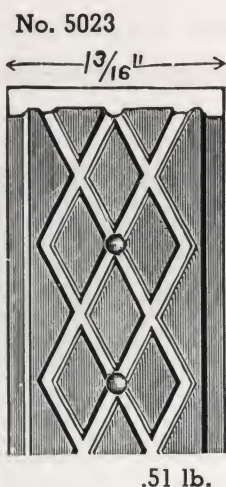

No. 5170

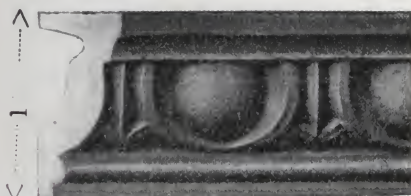


.67 lb.

No. 5171




1.32 lb.

No. 5172

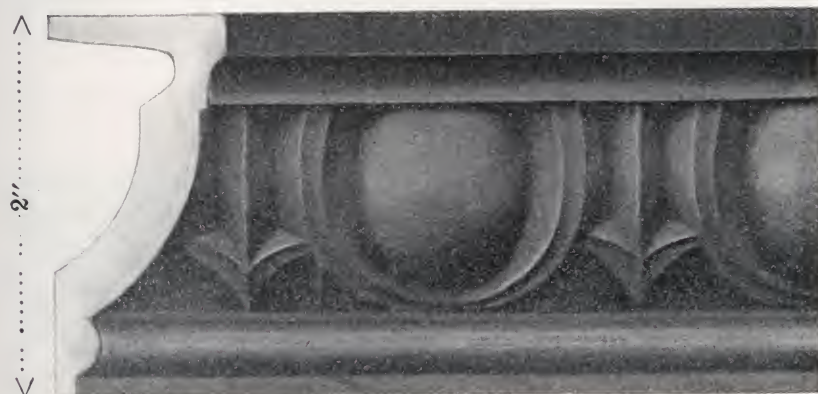


2.24 lb.

No. 5173

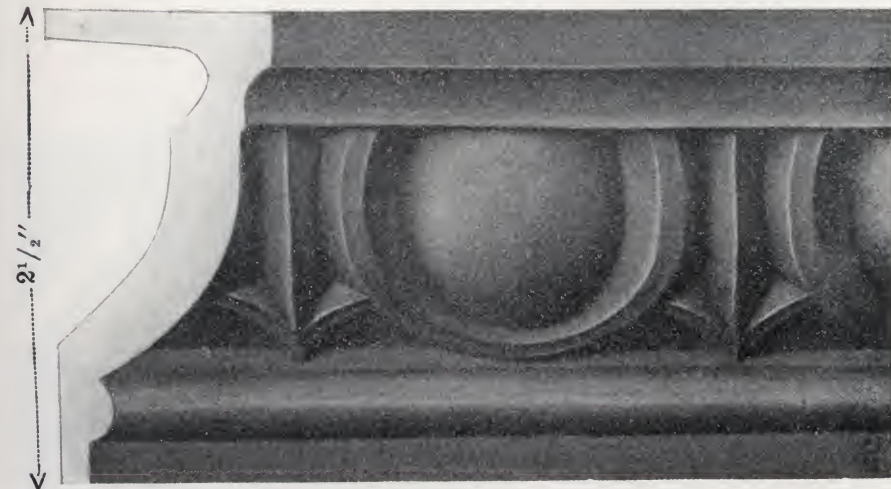


3.25 lb.

No. 5174

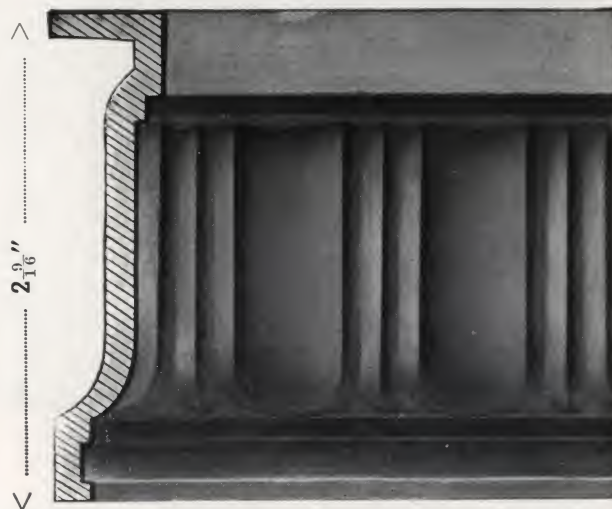


1.55 lb.

No. 5155

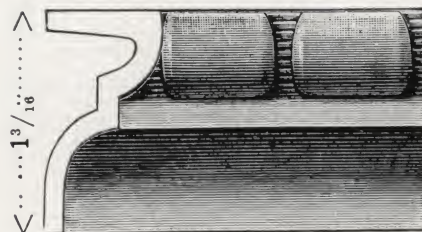


.80 lb.

No. 5156

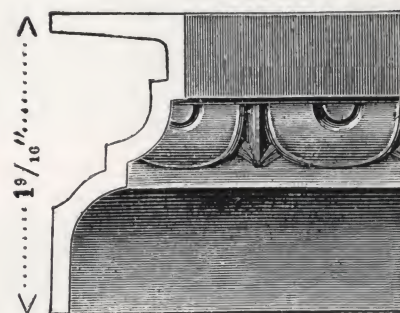


1.05 lb.

No. 5157

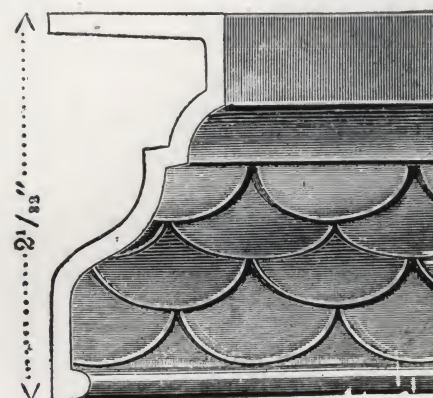


1.40 lb.

No. 5112

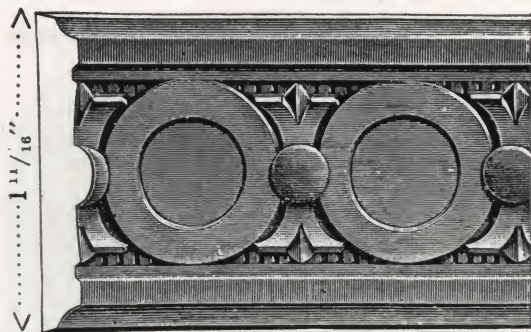

.96 lb.


No. 5111

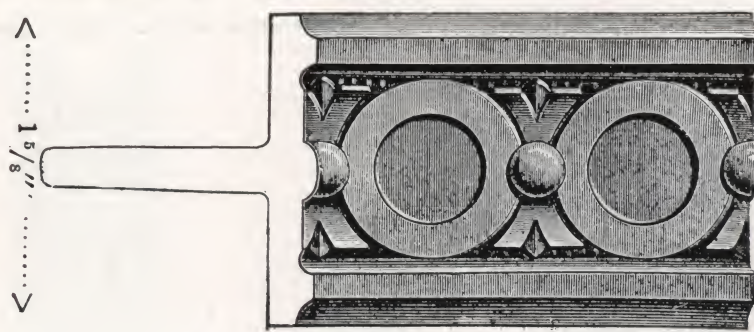

1.88 lb.


No. 5212

2 15/16"

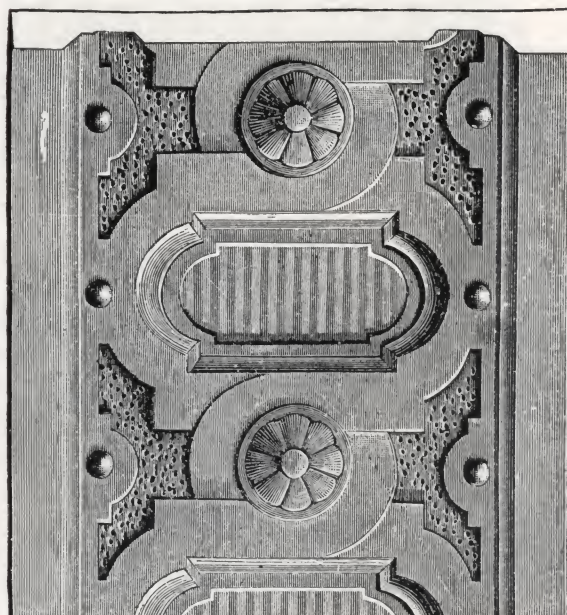

2.31 lb.


No. 5211

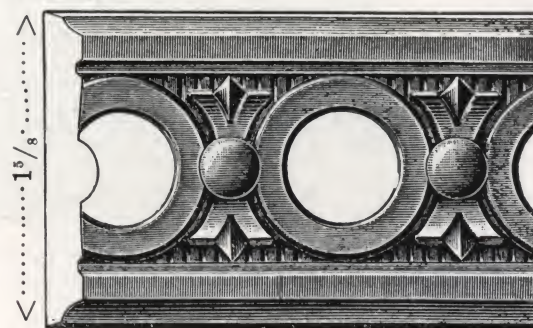

.90 lb.

No. 5203

3 15/16"

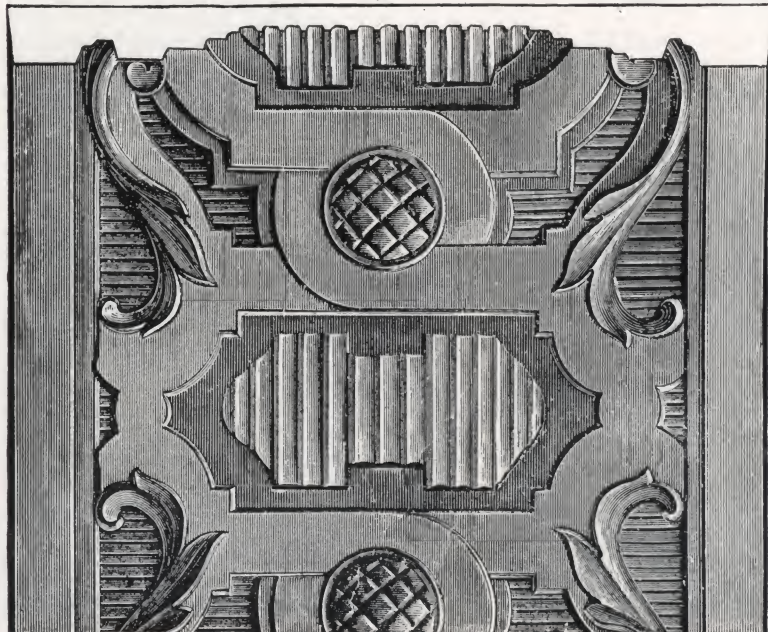


3.07 lb.

No. 5160



.57 lb.

No. 5161

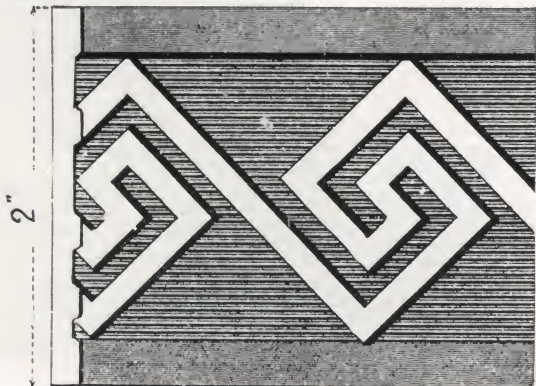

.98 lb.

No. 5252



1.41 lb.

No. 5251




2.20 lb.

No. 5250




2.23 lb.

No. 5201

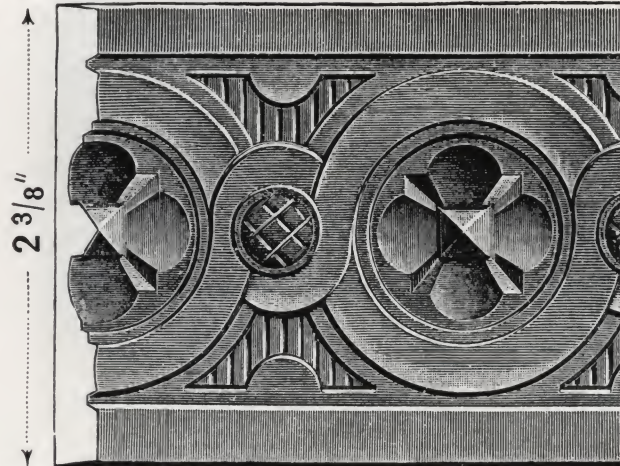

1.88 lb.

No. 5210

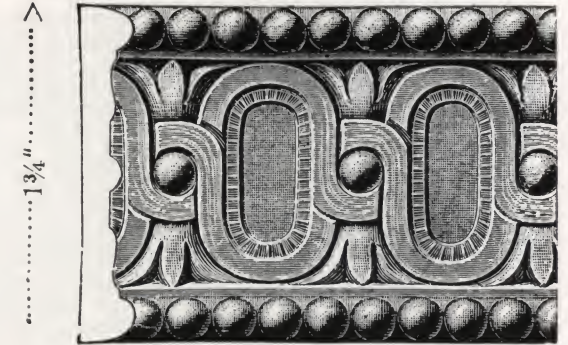


1.21 lb.

No. 5213



1.96 lb.

No. 5004

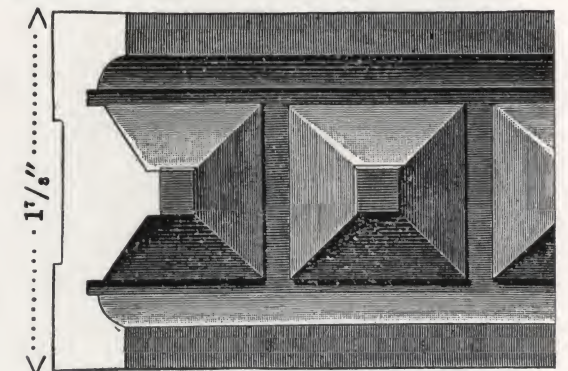

2.10 lb.


No. 5200




1.16 lb.

ROLLED STEEL CASEMENT MOULDINGS


No. 4625

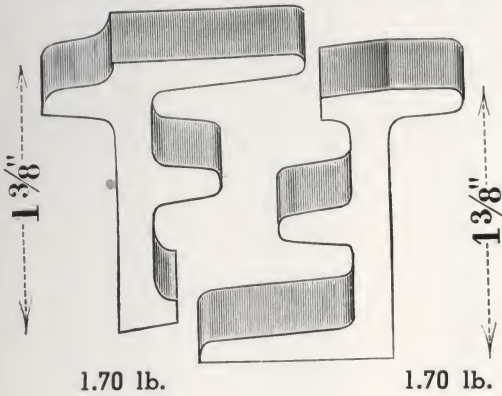


No. 4626

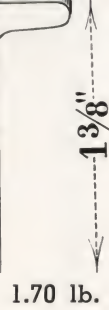



No. 4624

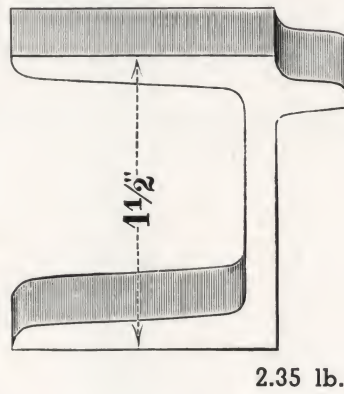


No. 4627

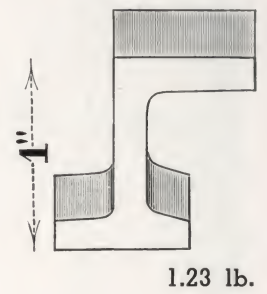


No. 4628

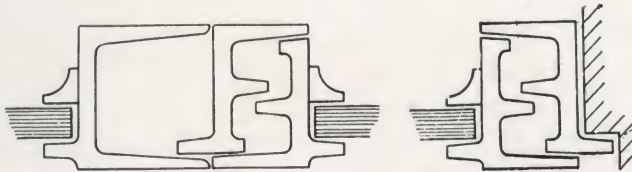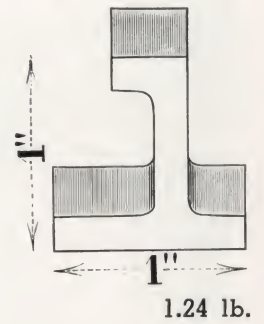


No. 4655

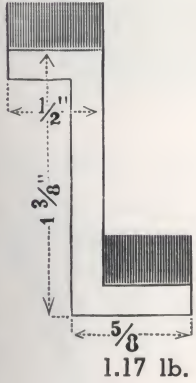



No. 4656

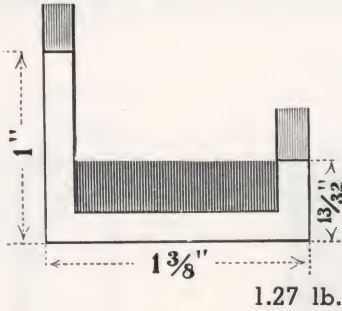

No. 4722

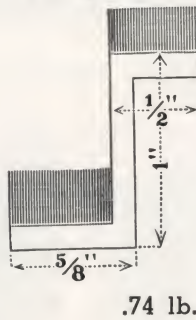


No. 4650

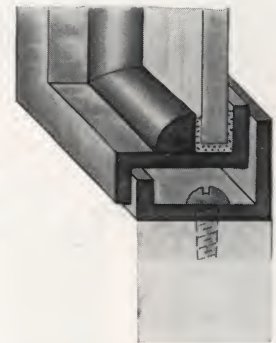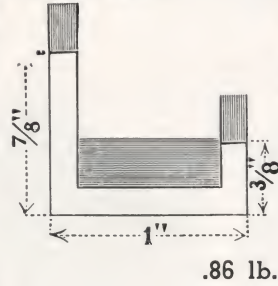

Rolled Steel Moulding
for Trench Covers

No. 4509

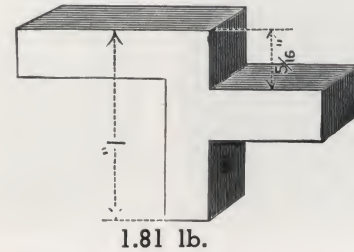




STEEL PARTITION

Plan Section from Wall to Door Jamb.



Showing pivoted and stationary glass frame.
TOP

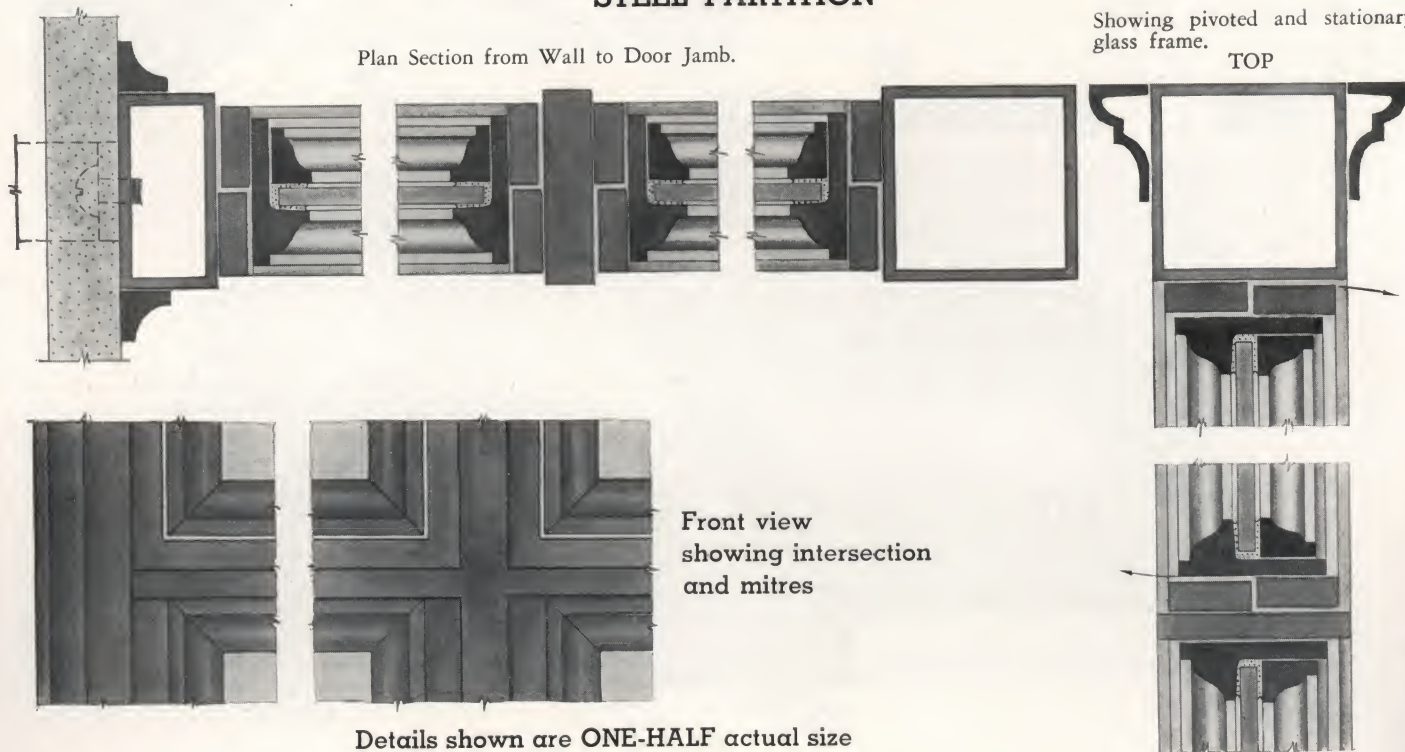


Front view
showing intersection
and mitres

Details shown are ONE-HALF actual size


MOULDINGS FOR GLASS CONSTRUCTIONS

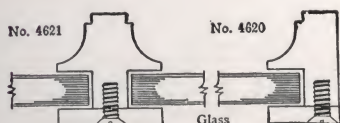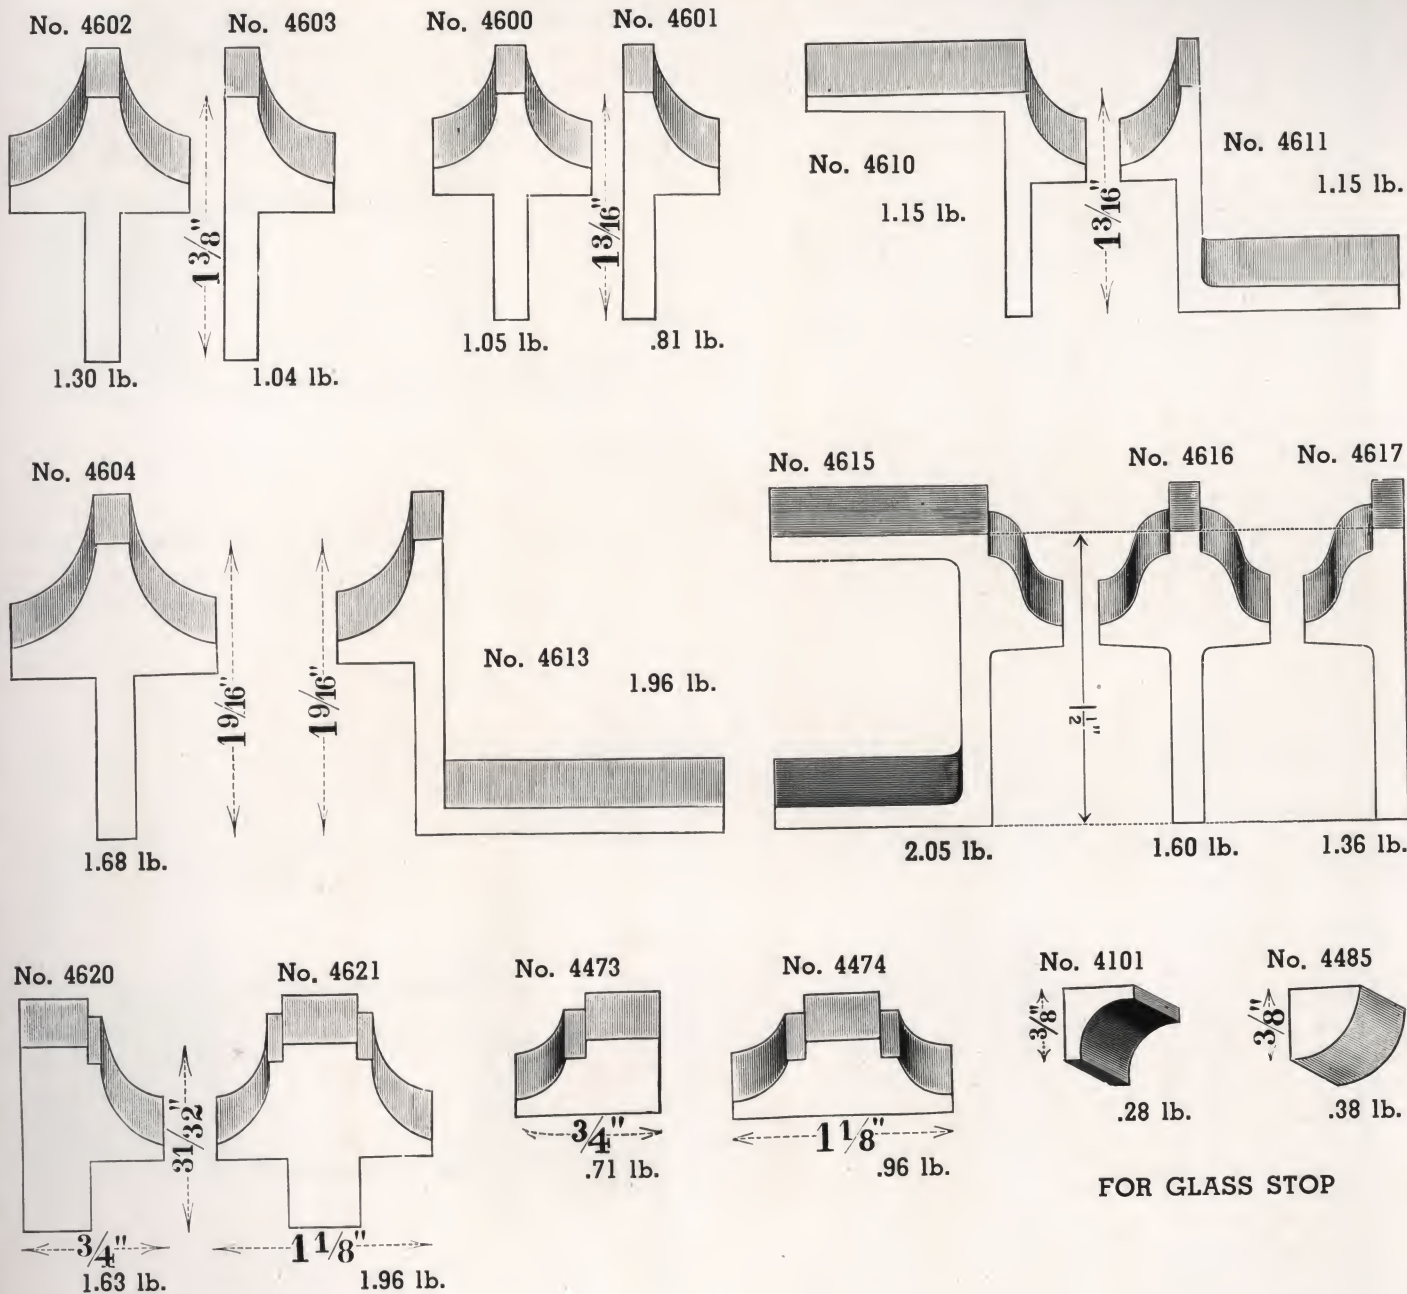

Showing how sections No. 4620 and No. 4621 are used for forming glass frames in vestibule and elevator doors and for partition work.

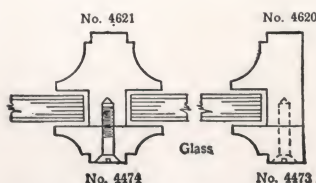


If Moulding is required both inside and outside use No. 4473 and No. 4474 for glass stops.

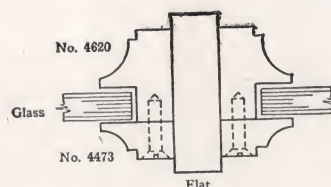

Showing Moulding No. 4620 forming a reinforced Mullion bar.

A flat bar of any desired size or rectangular tubing may be used in this manner, thereby forming an exceedingly strong construction.

DOOR

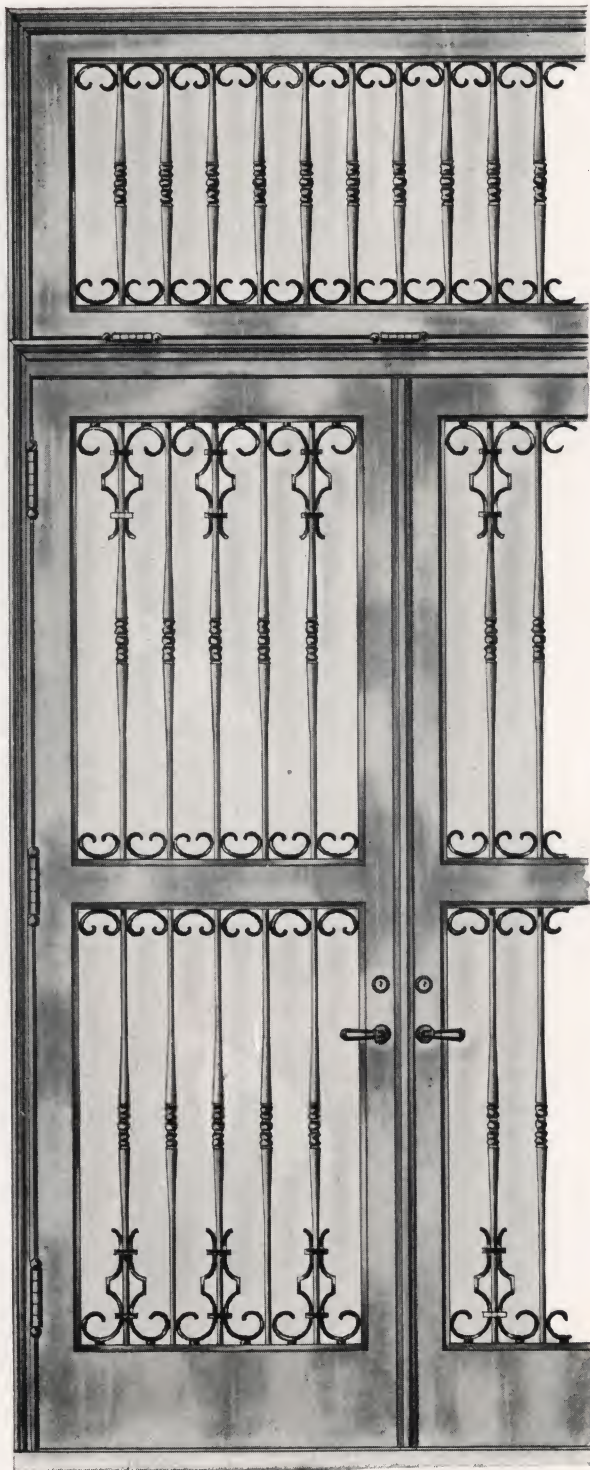


Grille: Hollow Tubular Spindles (or solid Forged Spindles). Scrolls forged from flat bars, spaced from frame by forged round or oval Balls.

Astragal: Moulding No. 4471.


Door Frame: Cold Drawn Rectangular Steel Tubing 3" x 2" x No. 14 gauge.

Hardware: Ball Bearing Hinges, Loose Pin Butts, Cylinder Lock, Octagon Handles, Flush Bolt (See pages Nos. 112 and 113 for details).

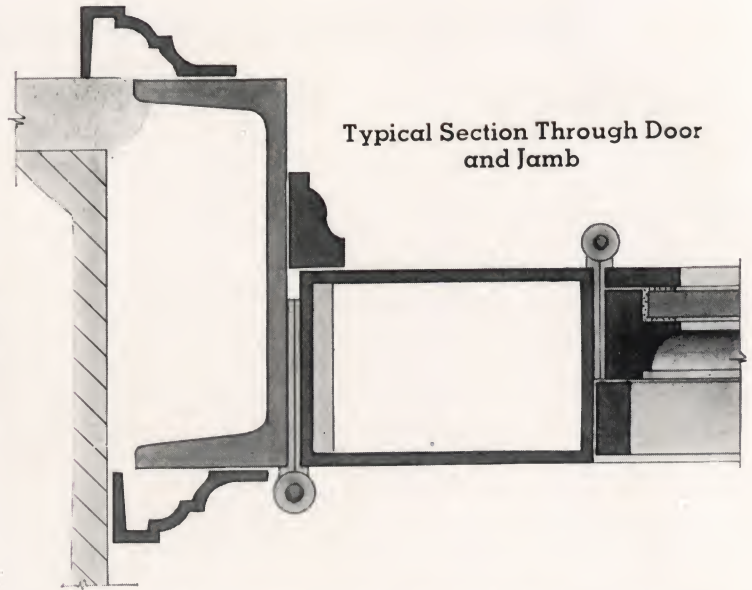

Typical Section Through Door and Jamb

(Above) Channel trimmed both sides with Moulding No. 4151
Striking bar Moulding No. 4256
Hinged glass frame Moulding No. 4620

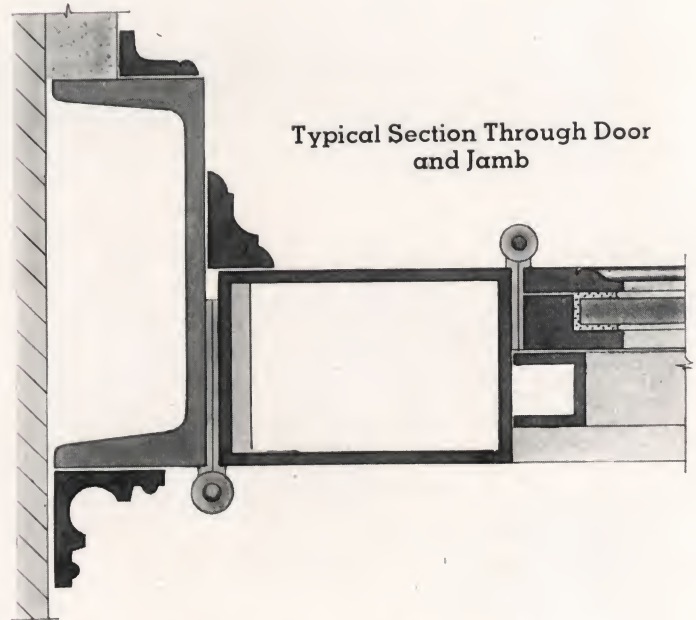


Typical Section Through Door and Jamb

(Above) Channel trimmed with Moulding No. 4495
Striking bar Moulding No. 4120
Plaster stop Moulding No. 4121
Hinged glass frame Mouldings Nos. 4460 and 4450
Grille frame Channel No. 4732


Details shown are ONE-HALF actual size

For further details about door construction, see Pages Nos. 68 and 76.


No. 4471

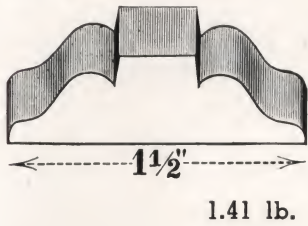


No. 4461

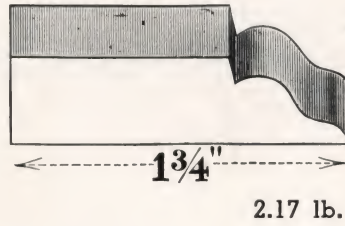


No. 4451




No. 4460




No. 4620

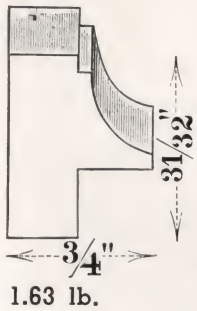


No. 4621

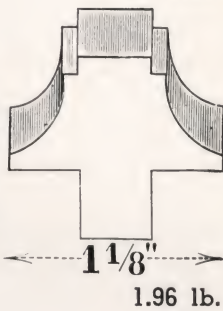


No. 4474




No. 4473




No. 4470




No. 4422

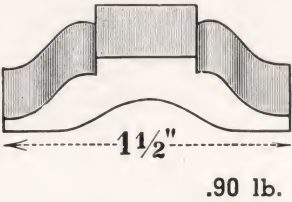


No. 4450



No. 4453




Showing how Mouldings Nos. 4450 and 4453 are used to form a glass frame.

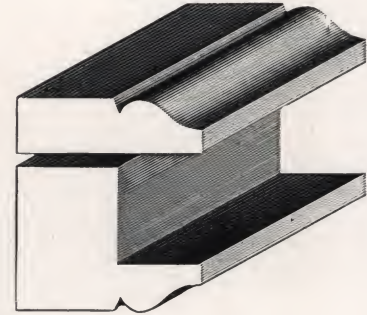

Cold Drawn Steel Mouldings

No. 696




No. 130









No. 152



No. 224

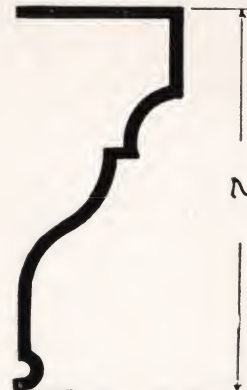


THESE MOULDINGS ARE COLD DRAWN FROM THIN STRIP STEEL

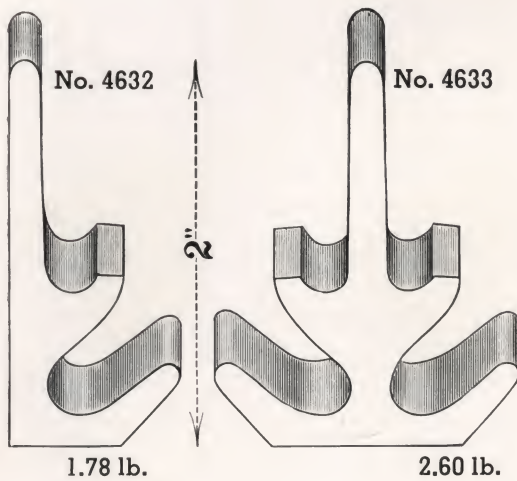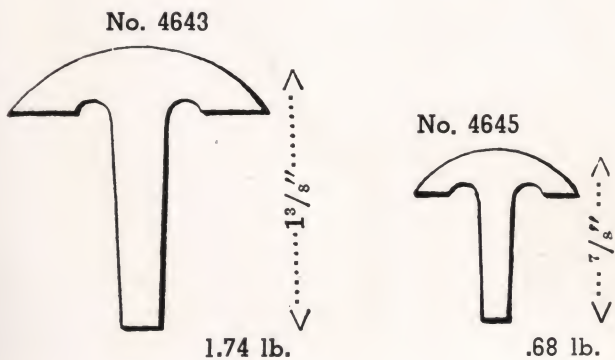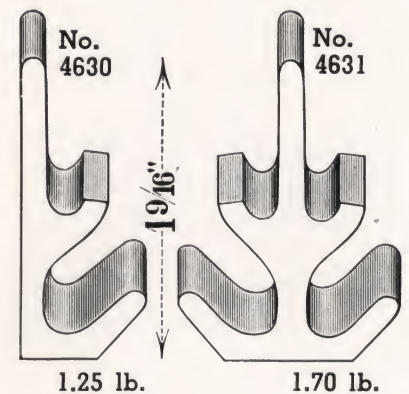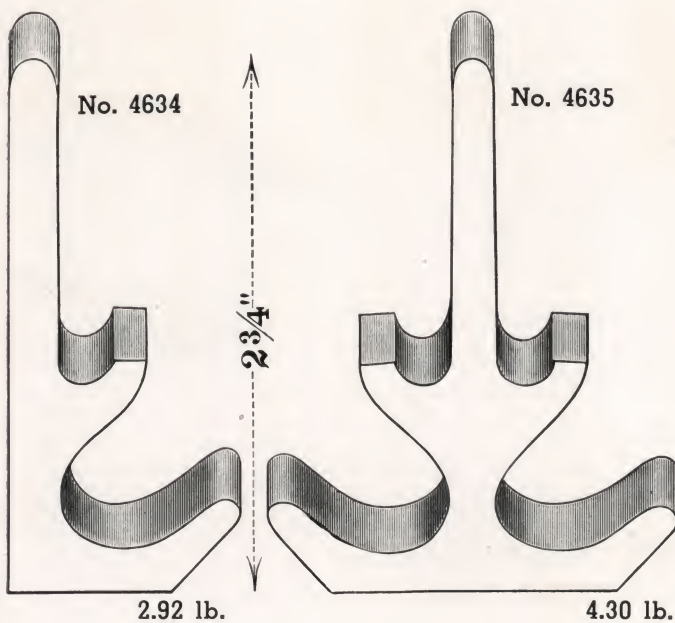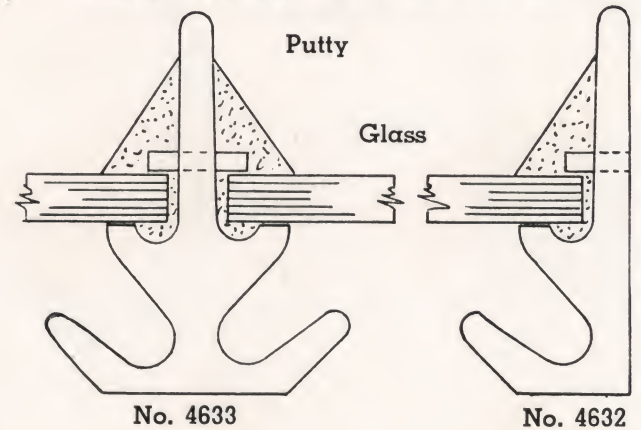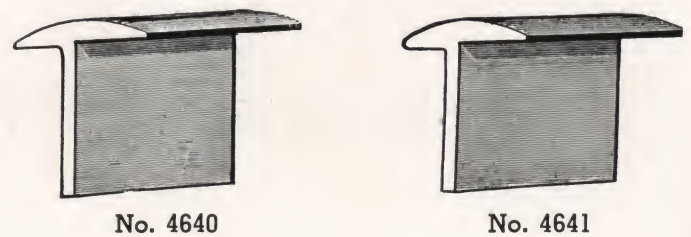ROLLED STEEL SKYLIGHT BARS**CONSTRUCTION OF ROLLED STEEL SKYLIGHT,
USING MOULDINGS No. 4632 and 4633****FOR STRIKING BARS**


ARCHITECTURAL BRONZE MOULDINGS

These Shapes can be used for the construction of store fronts, bank screens, wall panels, doors, partitions, fixtures, signs, bucks and other ornamental bronze work. All Architectural Bronze Mouldings and Shapes are uniform in color — furnished in random lengths up to about 20 ft. long or cut to specified lengths.

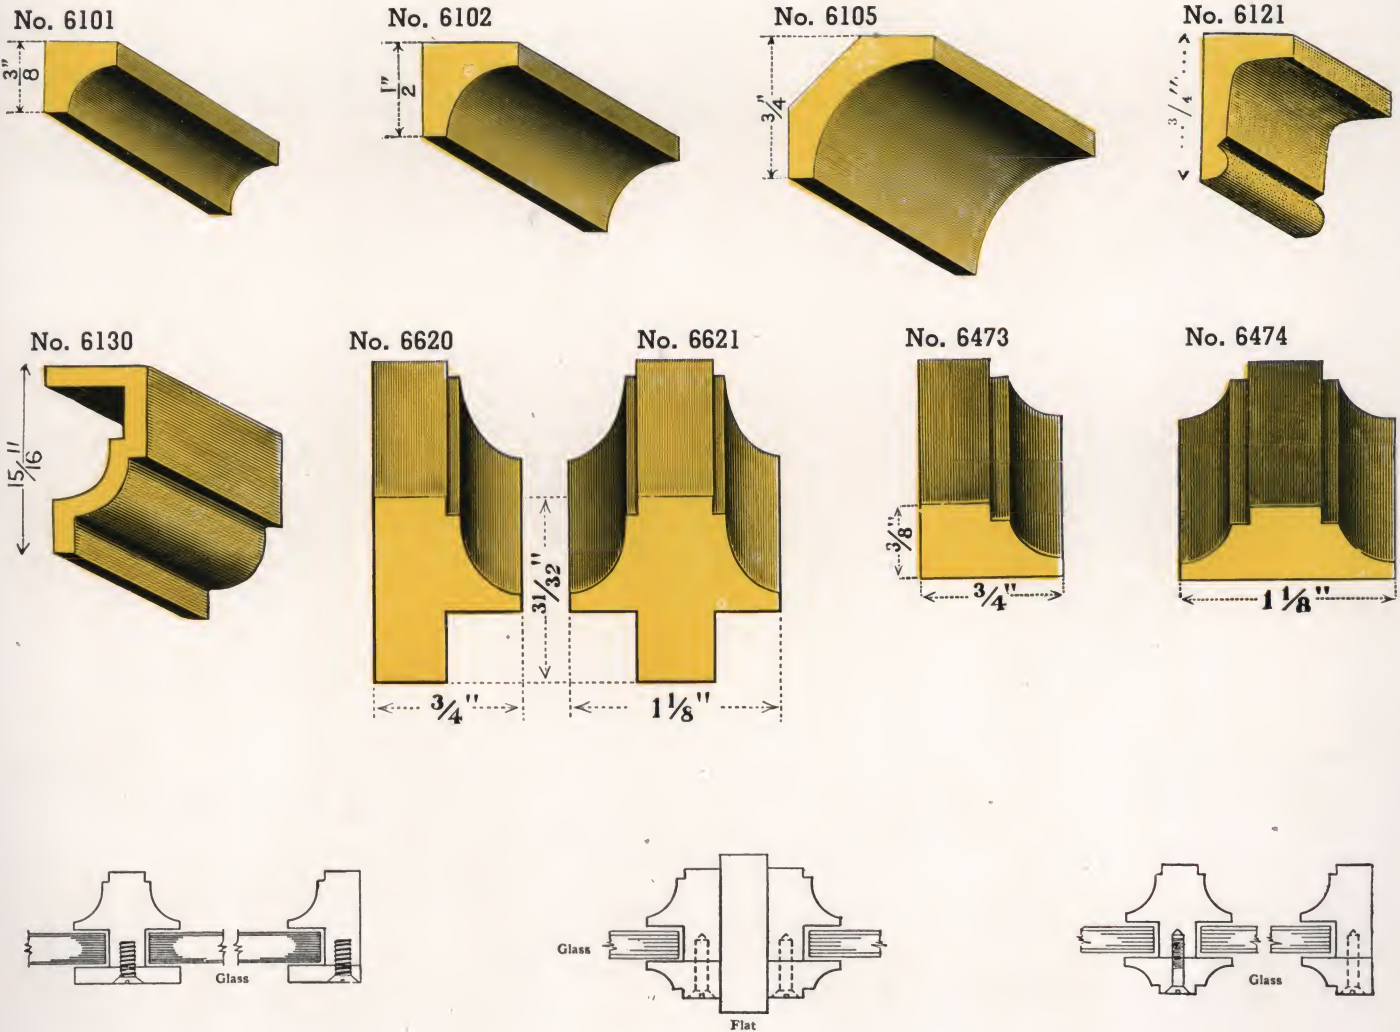


Details showing Mouldings Nos. 6620, 6621, 6473 and 6474 used for forming glass frames in Vestibule or Elevator Doors and for Partition Work.

For Trim and for Glass Stop

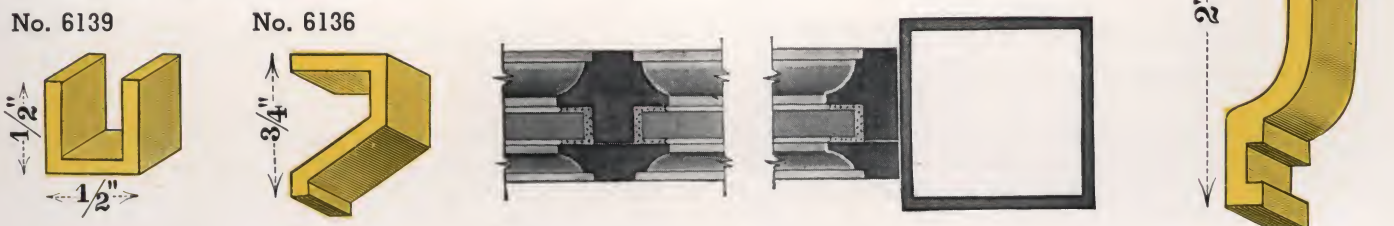


MULLION, BASE AND CORNER CONSTRUCTIONS

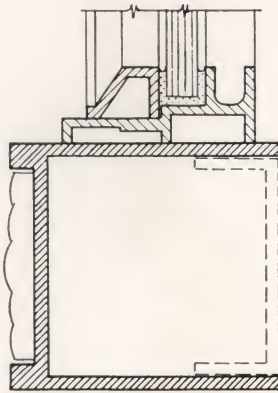


Sill constructed with Aluminum Mouldings Nos. 6942, 6937, 6936.

Channel in back may be recessed if plain panel effect or ornamentation on both sides is desired.

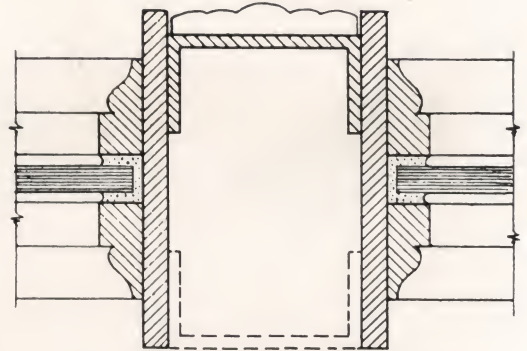


Mullions or transoms of any desired width or depth may be constructed by using Channels (or Angles and Plates). Suitable Mouldings are used for Glass Stops.

The Channel in back of the Mullion may be recessed if plain panel effect or ornamentation on both sides is desired.

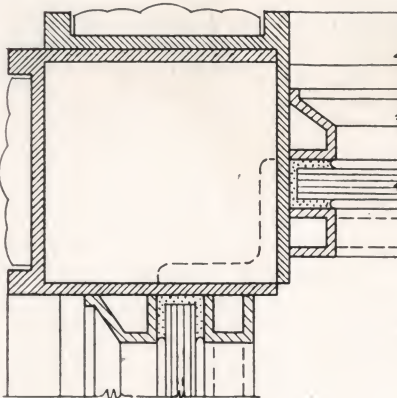

Details are shown
ONE-HALF
actual size

Corner constructed with Aluminum Mouldings Nos. 6942, 6943, 6936, 6956.

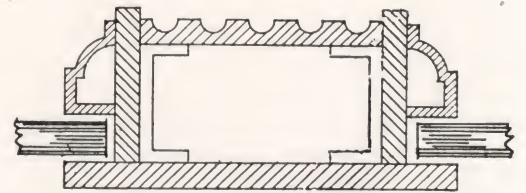

Showing similar construction as above with plain flat bar in back used as Glass Stop.

All the constructions shown may be ornamented with **APPLIED DESIGNS** and Rosettes as shown on Pages Nos. 104, 105 and 107 or with Flat Fluted Mouldings as shown on Page No. 98.

Strikingly beautiful effects may be produced by combining steel, bronze and aluminum shapes.

SEAMLESS DRAWN SQUARE AND RECTANGULAR ALUMINUM TUBING


We can furnish from mill a large variety of sizes and gauges of Seamless Drawn Square and Rectangular Aluminum Tubing with sharp or with rounded corners. Also Round, Oval and odd shapes of Tubing.

EXTRUDED ALUMINUM SHAPES



We are prepared to furnish from mill Extruded Aluminum Sections of every shape and alloy. Tools are available at the mill for a large variety of shapes and, in addition, we can make up special dies to customer's specification.

ALUMINUM MOULDINGS


Store Front Moulding
(with condensation gutter)

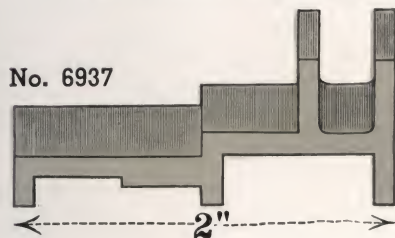

For Trim and for Glass Stop




No. 6938

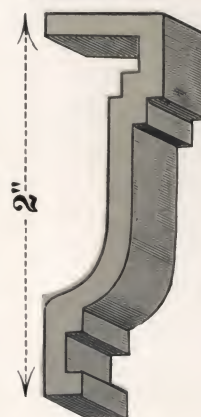



We carry in stock: ALUMINUM MACHINE SCREWS, Countersunk Flat Head
 $\frac{1}{4}$ " No. 20—1" long $\frac{1}{4}$ " No. 20—1 $\frac{1}{2}$ " long $\frac{1}{4}$ " No. 20—1 $\frac{1}{4}$ " long

COVE MOULDINGS AND GLASS STOPS

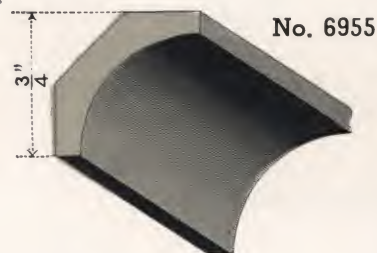


Aluminum Mouldings Nos. 6942, 6943, 6937, 6936 and 6956 are especially suited for construction of Store Fronts, Bank Screens and Partitions

Typical construction details are shown on Page No. 74

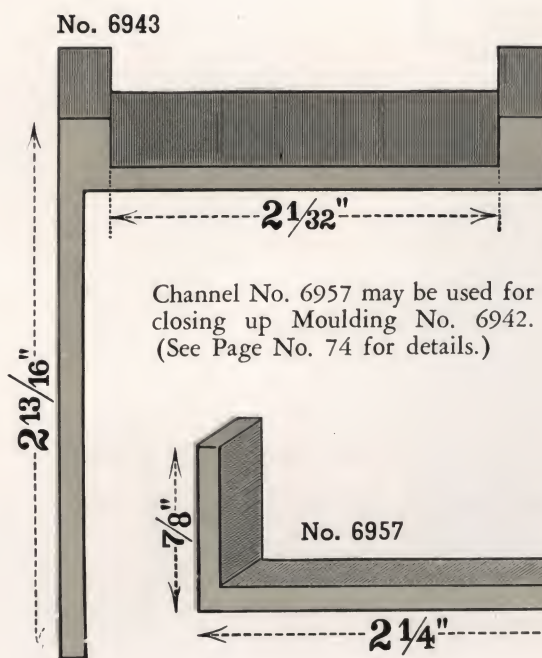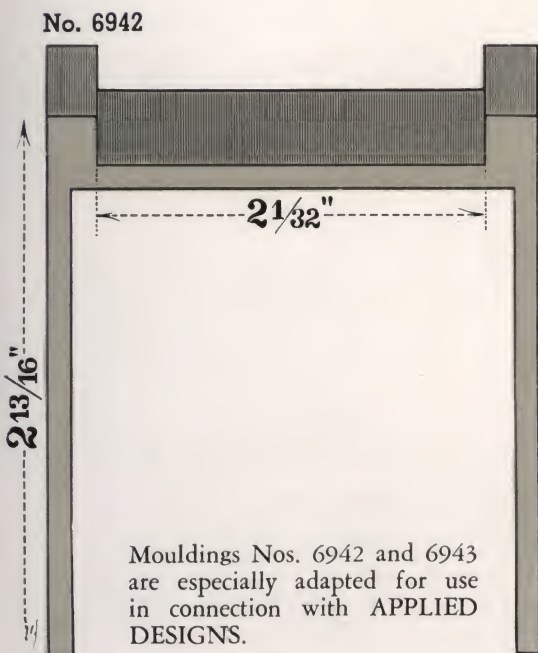

Channel No. 6957 may be used for closing up Moulding No. 6942. (See Page No. 74 for details.)

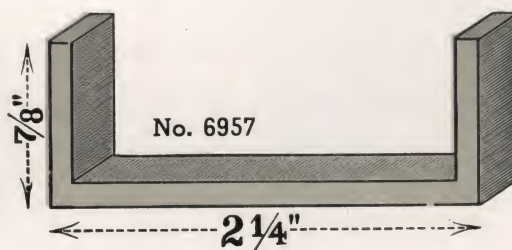

Mouldings Nos. 6942 and 6943 are especially adapted for use in connection with APPLIED DESIGNS.

ARCHITECTURAL BRONZE DOOR EDGINGS

No. 6642



No. 6643




No. 6640



No. 6641



No. 6646


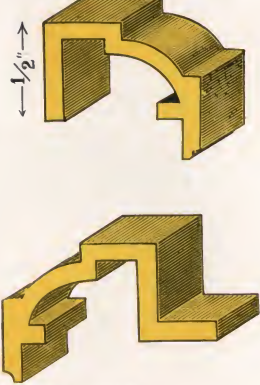


No. 6645



FOR 1 3/4" DOOR

Showing construction of doors with glass or with solid panels by use of Rolled Steel Channel No. 4762 for inner framing and Architectural Bronze Edgings and Glass Frame Mouldings. Doors constructed in this manner may have stiles of any width. Strikingly beautiful effects may be produced by using different metals or plastics for stile facing and by combining contrasting colors with Architectural Bronze Door Edgings.


Architectural Bronze Door Edgings may be used in a similar manner for 1 3/4" thick tubular doors, kalamein or wood doors.

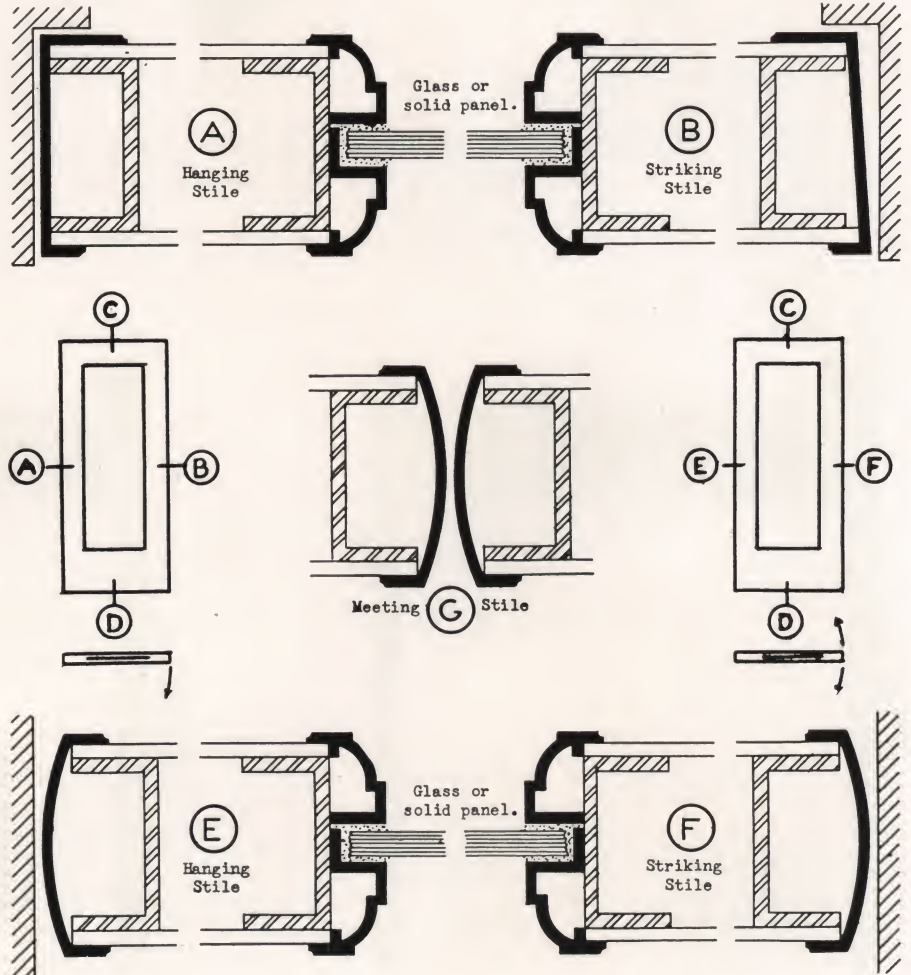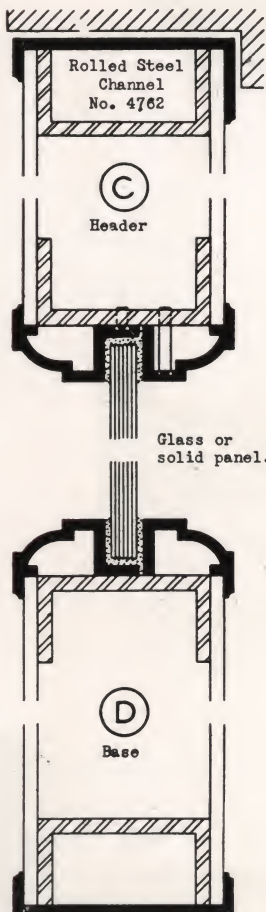


NOSINGS FOR STAIRS AND PLATFORMS

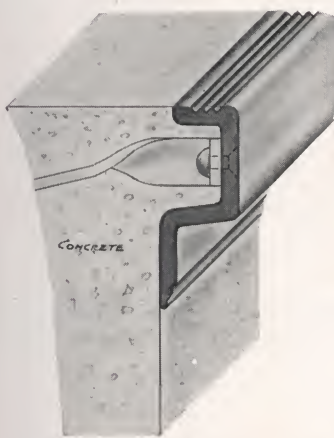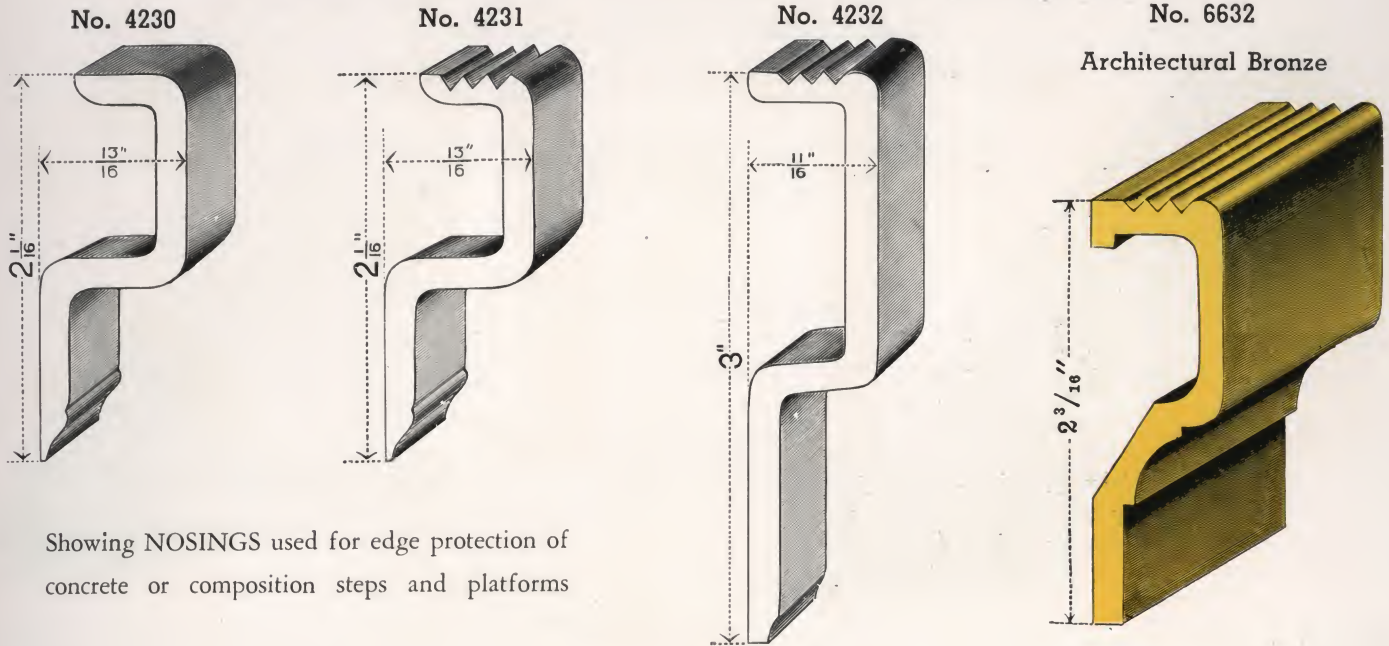


Showing NOSING applied to concrete riser and step (with anchor).

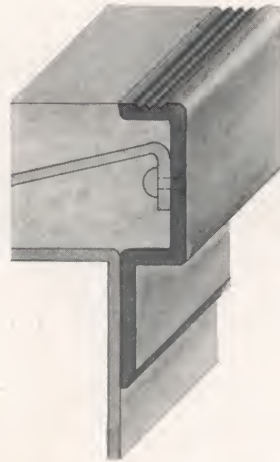


Showing NOSING applied to steel riser and steel subread (with anchor).

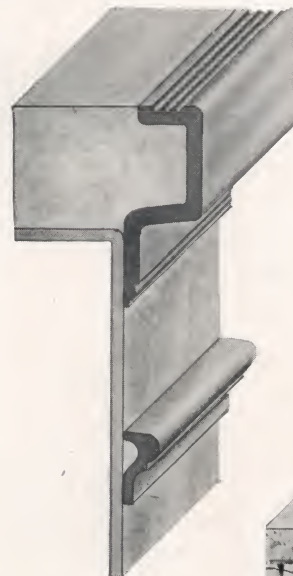

Showing NOSING applied to panelled steel riser and steel subread.

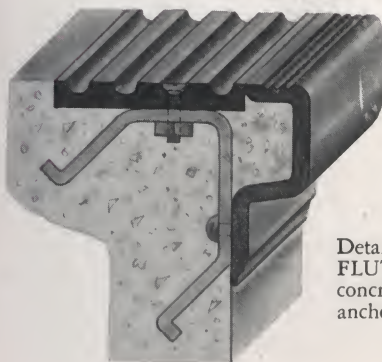

Detail of NOSING and FLAT FLUTED SECTION applied to concrete riser and tread (with anchor).

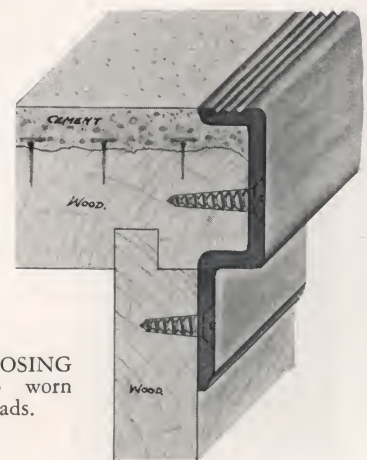

Showing NOSING applied to worn wooden treads.

HOT ROLLED GALVANIZED STEEL CURB BARS

FOR THE PROTECTION OF STAIR TREAD AND PLATFORM EDGES,
CURBS, COLUMN CORNERS, ETC., ETC.

THE NOSING AND ANCHORS CONSIST OF ONE PIECE


Showing Method of Employment on Curb
or Stair Edge. Note firm hold of anchor
in concrete.

These mouldings are rolled from
soft steel and can be bent easily.

Curb Bars are shown
ONE-QUARTER actual
size.

SECTION No. 4246 is a galvanized Steel Angle nosing with non-slipping safety tread. The forked anchors are punched and sheared from the top flange of the $1\frac{1}{4}$ " x $1\frac{1}{4}$ " x $\frac{3}{16}$ " galvanized angle and extend $2\frac{3}{4}$ " into the concrete, at a downward angle.


SECTION No. 4245 is a galvanized Steel Tee Moulding, rolled with a 1" Radius. The anchors are sheared and bent away from the center web, giving a $2\frac{3}{4}$ " anchorage into the concrete. These anchors are slightly staggered, which distributes the stress and prevents splitting of the concrete and permits a ready flow of same between the anchors.

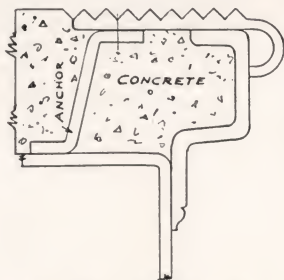


Moulding No. 4508 with anchor
and Nosing No. 4230 used on steel
risers.

NON-SLIPPING EDGE NOSINGS

No. 4508

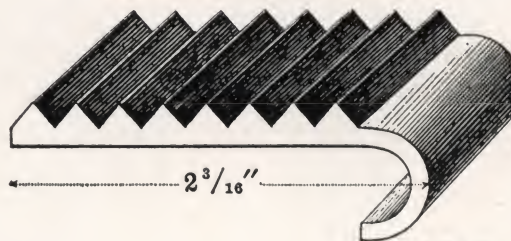


1.34 lb.

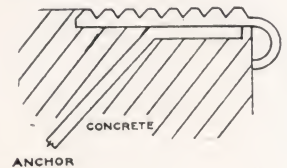


Moulding No. 4508 with anchor
for protection of concrete edges.

No. 4497

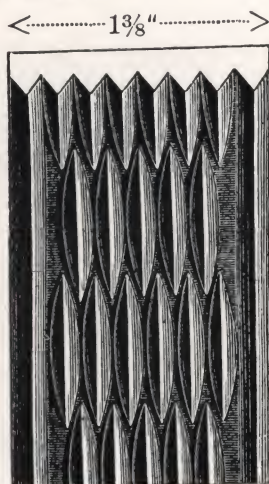


.54 lb.

No. 4498

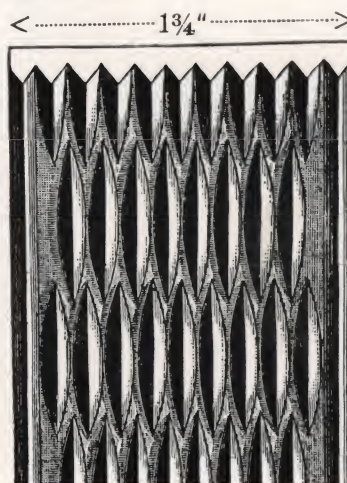

.81 lb.

No. 4499

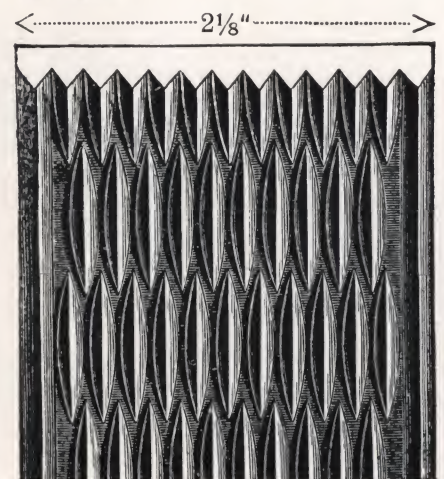

.99 lb.

SADDLES

JULIUS BLUM Rolled Steel, Architectural Bronze and Aluminum Shapes shown on the following pages provide a selection of sections for the construction of Thresholds and Elevator Saddles of all types.

These sections are of superior quality, free from imperfections, straight and true in alignment.

Rolled Steel, Architectural Bronze and Aluminum Sections are carried in stock in long bars and can also be furnished cut to specified lengths.


It is impossible to show in this catalog the great variety of Door Sills and Elevator Saddles which may be assembled at low cost by the use of our Shapes.

No elaborate details, patterns, machining or cleaning are necessary and it is possible to obtain without waiting a single saddle or a large quantity for any typical form of construction.

Conditions which can be met through the use of these sections include:

Any Length, Width or Depth—Single Groove—Double Groove—Without Groove—Any Door Thickness—Center Opening—Side Opening—Single, Double or Hinged Doors—Between Jamb—Behind Jamb—With or Without Cut-outs for Floor Hinges, Mullions or Door Bucks — Weatherstrip — Roof Door Saddles, etc.


Julius Blum & Co., Inc. will be pleased to submit details or sketches as to how to build up Thresholds or Elevator Saddles of special character.

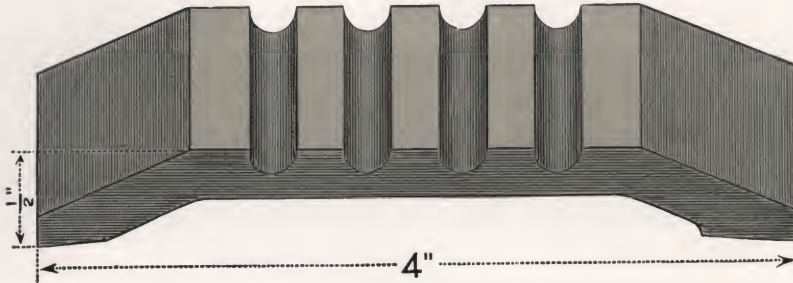ARCHITECTURAL ALUMINUM DOOR SADDLESNo. 6923 4" wide x $\frac{1}{2}$ " high



Aluminum Door Saddles are made from a tough, heat treated, wear resisting Aluminum Alloy. Surface is free from imperfections. A highly polished finish can be produced by buffing.

**ALUMINUM WOOD SCREWS
CARRIED IN STOCK**

$1\frac{1}{2}$ " Long x No. 16 Flat Head
2" Long x No. 16 Flat Head

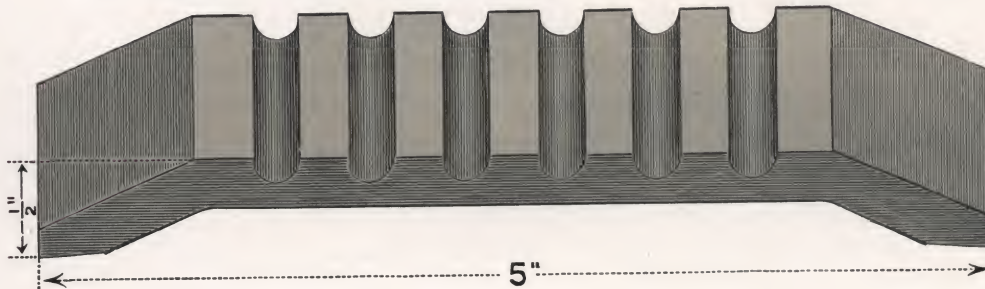
No. 6922 5" wide x $\frac{1}{2}$ " high

Carried in stock in long straight bars. Can also be cut to specified lengths.

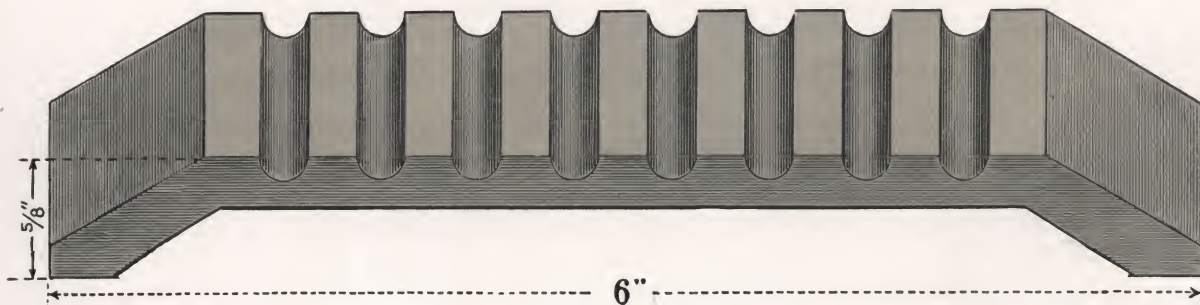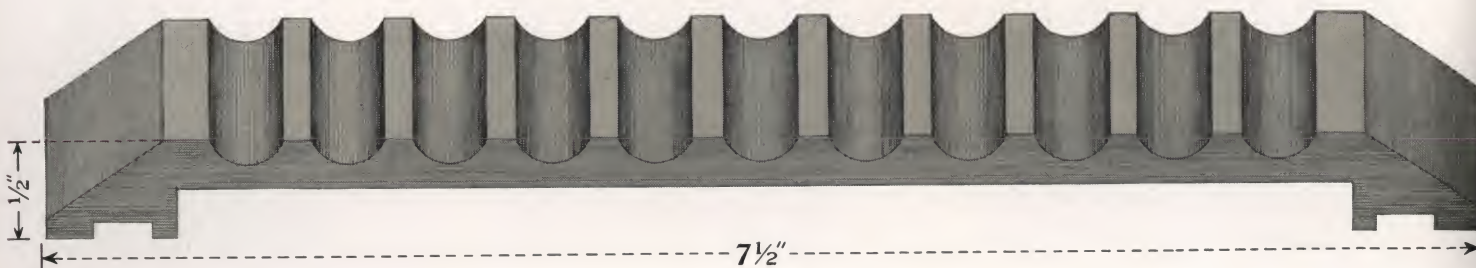
No. 6920 6" wide x $\frac{5}{8}$ " highNo. 6919 $7\frac{1}{2}$ " wide x $\frac{1}{2}$ " high Sufficiently Wide to Cut-Out for Floor Hinge Boxes

ROLLED STEEL DOOR SADDLES


No. 4504

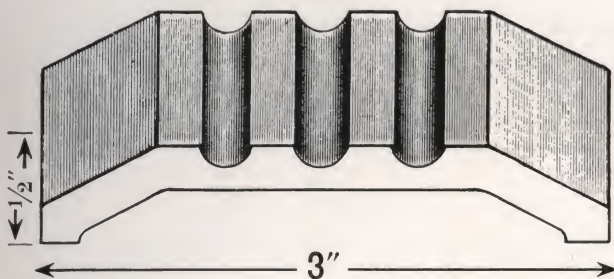


No. 4503

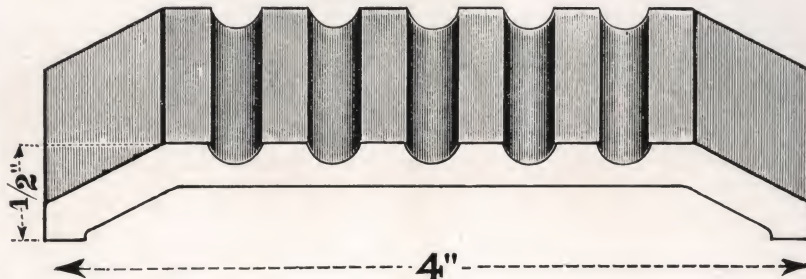

No. 4501

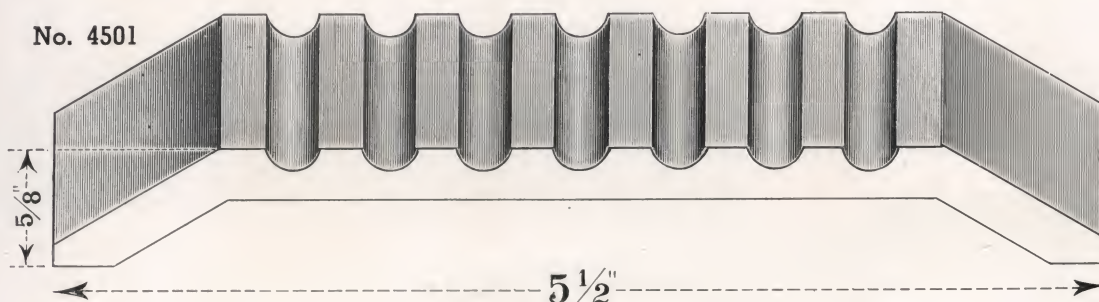

No. 4500

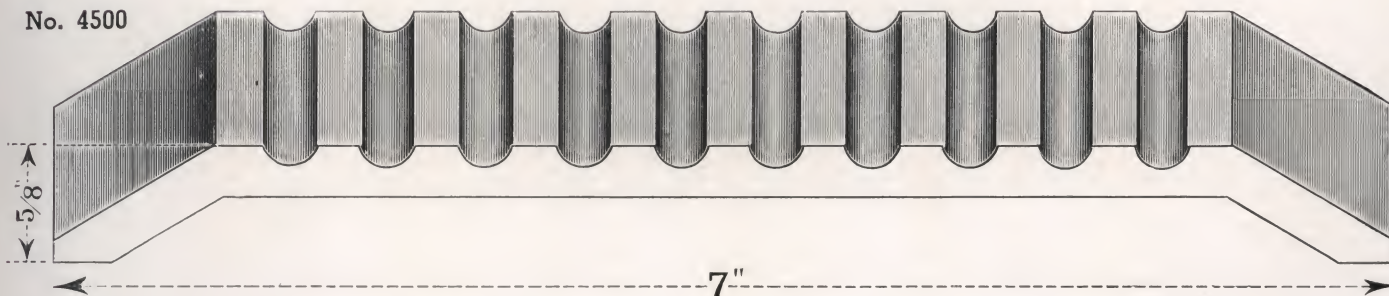

ROLLED STEEL DOOR SADDLES are stronger, cleaner in appearance and cheaper than Cast Iron Saddles.

ROLLED STEEL DOOR SADDLES may be properly centered between jambs and doors may be hung without the necessity of changing the position of the saddle.

ROLLED STEEL DOOR SADDLES may be fitted with ease and at low cost into jamb or around mullions.


CARRIED IN STOCK IN LONG, STRAIGHT BARS, CAN ALSO BE CUT TO SPECIFIED LENGTH

NO BREAKAGE
NO PATTERNS


NO IMPERFECTIONS
LOW IN COST

NO WAITING





NO STRAIGHTENING
NO ERRORS

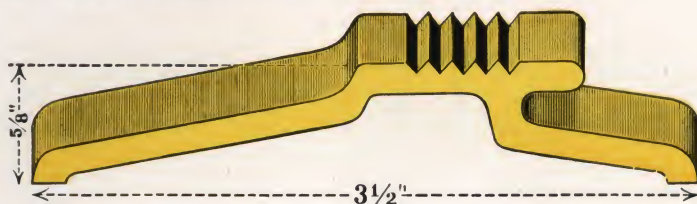WEATHERSTRIP DOOR SILLS**No. 4590 ARCHITECTURAL BRONZE**

Brass Hook Strip can be furnished from stock to be used with sills No. 4590, No. 4591, No. 4593, No. 4598 and No. 6991.

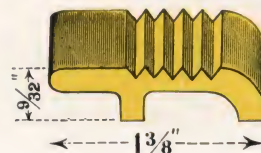No. 4598 ARCHITECTURAL BRONZE

May be used alone or with other saddle sections.

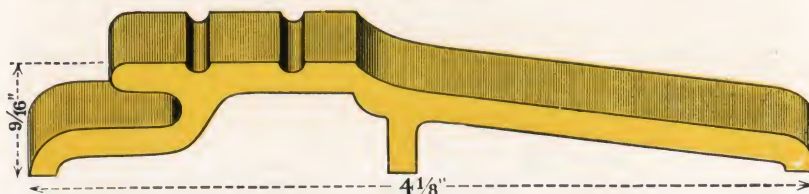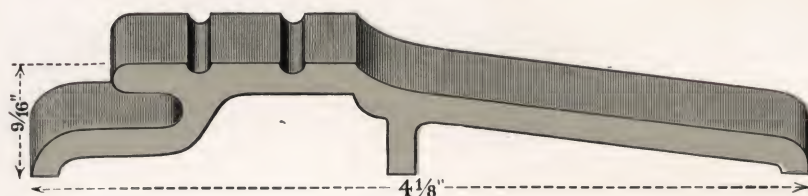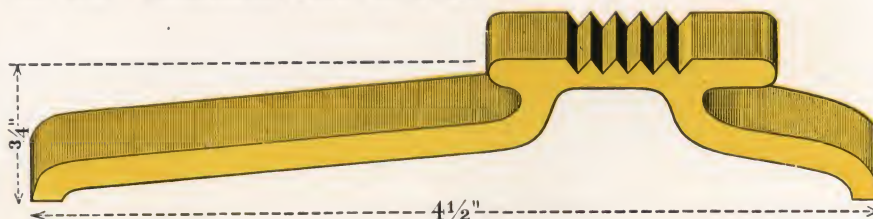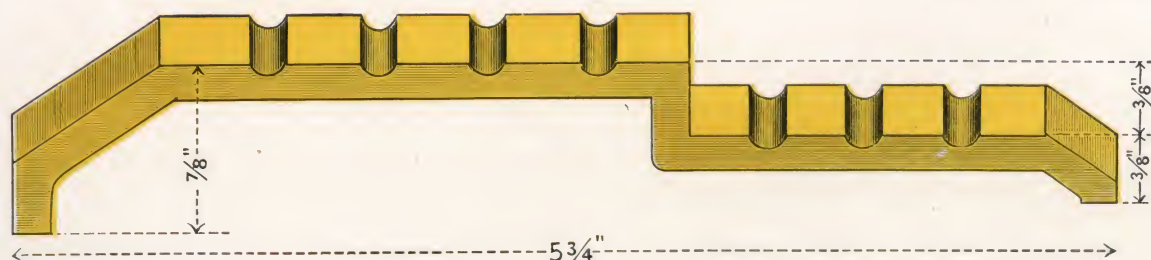No. 4591 ARCHITECTURAL BRONZE**No. 6991 ARCHITECTURAL ALUMINUM****No. 4593 ARCHITECTURAL BRONZE****No. 4597 ROOF DOOR SADDLE****ARCHITECTURAL BRONZE**

CARRIED IN STOCK IN LONG, STRAIGHT BARS. CAN ALSO BE CUT TO SPECIFIED LENGTH

NO BREAKAGE
NO PATTERNS


NO IMPERFECTIONS
LOW IN COST

NO WAITING


NO STRAIGHTENING
NO ERRORS

ARCHITECTURAL BRONZE DOOR SADDLES


No. 4524

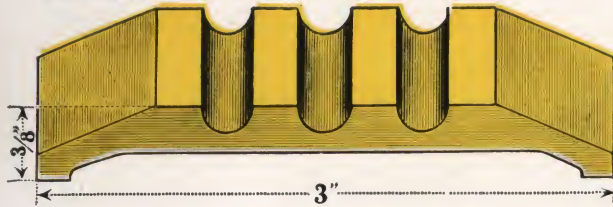

No. 4510

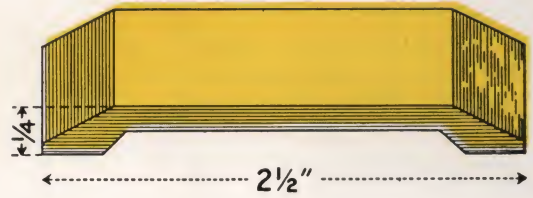


No. 4523

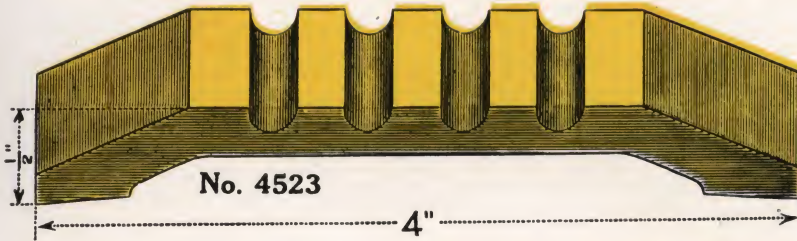


EXTRA WIDE SADDLES

Bronze Saddles from 7" to 10" wide may be constructed by using sections No. 4511, No. 4512 and No. 4513 shown on page No. 91. For wider Saddles use Flat Fluted Sections and Bevel End Pieces shown on page No. 85.


No. 4521

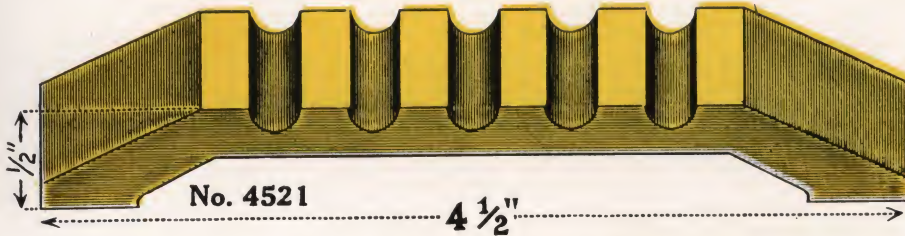


No. 4522

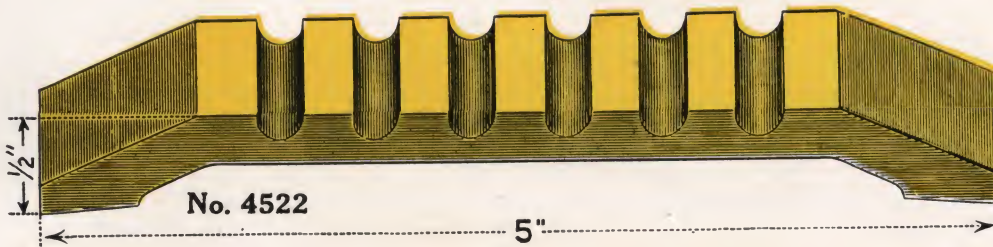




No. 4520

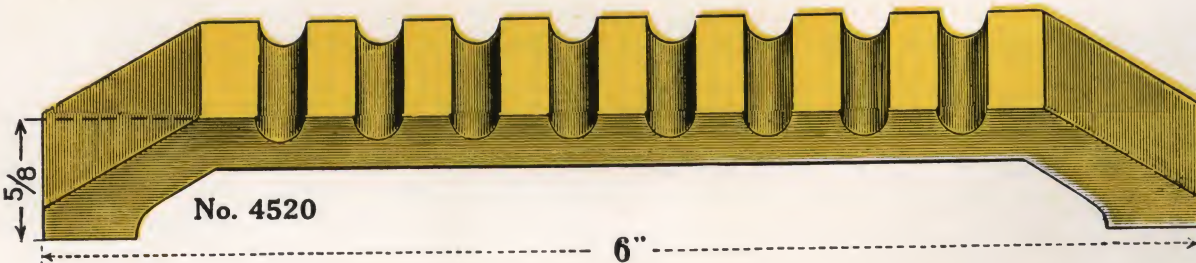

No. 4525

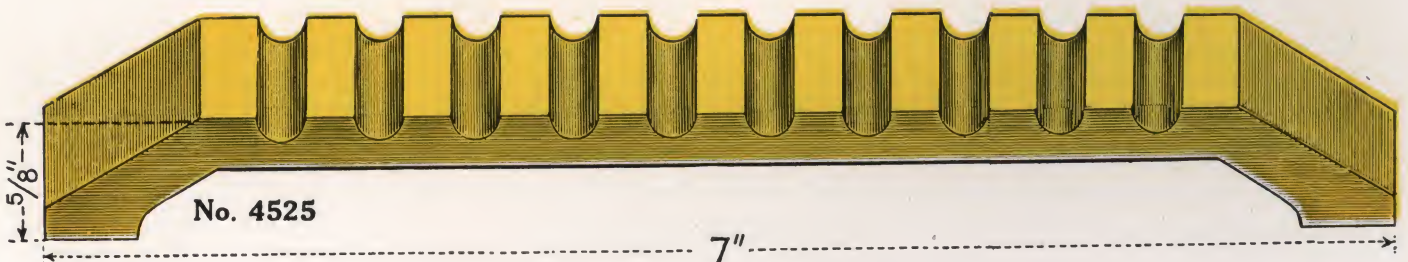


Architectural Bronze Sections for Elevator and Door Saddles

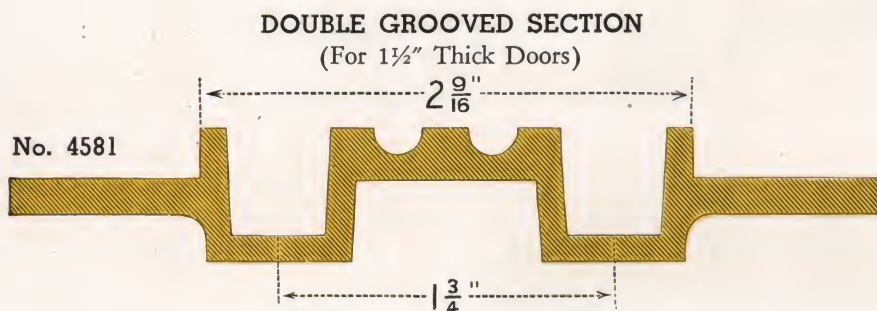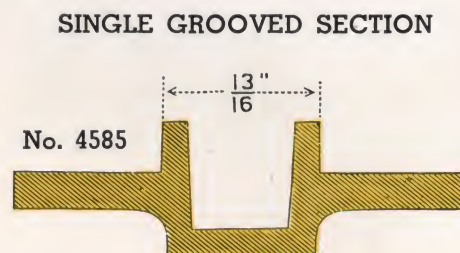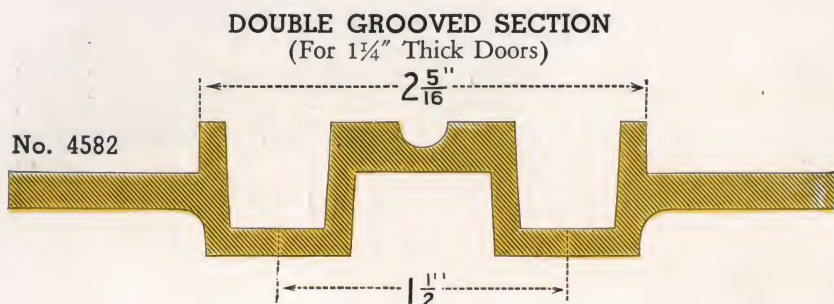




INSERT SECTION
No. 4588



For filling up part of groove and for door stop.

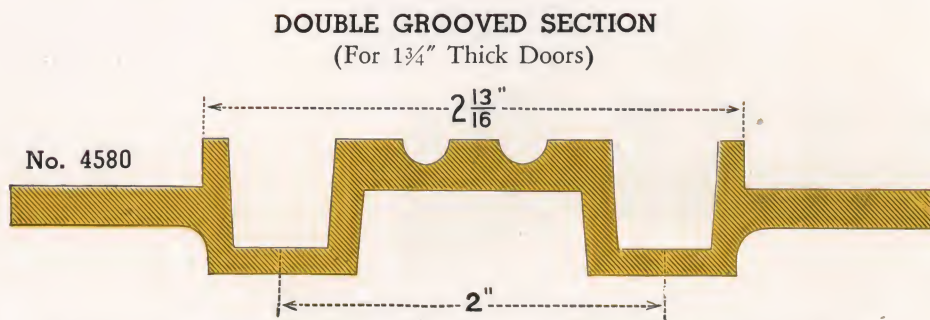

If doors are slightly thicker or thinner the guide pins in the bottom of the door are set a trifle off center. As a rule, $\frac{1}{4}$ " clearance is allowed between doors.

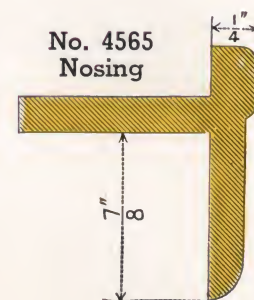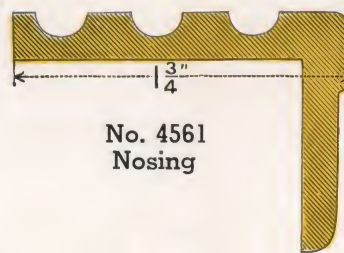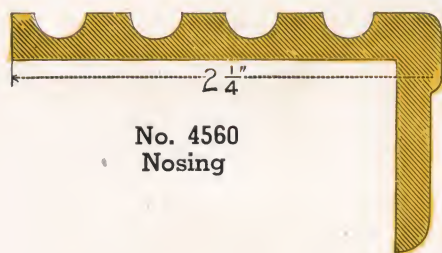

BRONZE RIVETS FOR ASSEMBLING SADDLES

$\frac{3}{16}$ " x $\frac{9}{16}$ "	Round Head
$\frac{3}{16}$ " x 1"	" "
$\frac{1}{4}$ " x $1\frac{1}{8}$ "	" "

Architectural Bronze Sections for Door and Elevator Saddles

No. 4559

6 ¹/₈"

No. 4550

5 ¹/₂"

No. 4551

5"

No. 4552

4 ¹/₂"

No. 4553Q

4 ¹/₄"

No. 4553

4"

No. 4554

3 ¹/₂"

No. 4555

3"

No. 4528

3/4" x 3/8"

No. 4526

7/8" x 1/2"

No. 4527

1" x 5/8"

No. 4558

1 ¹/₂"

No. 4557

2"

No. 4556

2 ¹/₂"

ANGLE

1" x 1" x 3/16"

PLAIN SECTIONS FOR PANELS

5/8" x 1/4"
3/4" x 1/4"
1" x 1/4"
2" x 1/4"
3" x 1/4"

1/4" half round for filling in grooves.

CARRIED IN STOCK IN LONG, STRAIGHT BARS, CAN ALSO BE CUT TO SPECIFIED LENGTH

NO BREAKAGE	NO IMPERFECTIONS	NO STRAIGHTENING
NO PATTERNS	LOW IN COST	NO ERRORS
		NO WAITING

TUBING & SHAPES
ORNAMENTS
MISCELLANEOUS


Typical Construction of Architectural Bronze Elevator Saddles

CONSTRUCTION OF BRONZE ELEVATOR SADDLE WITH DOUBLE GROOVES

DOUBLE GROOVE ELEVATOR SADDLES (or for triple doors), opening right or left may be constructed by using Double Groove Sections Nos. 4580, 4581 or 4582 in conjunction with fluted flats of suitable widths. As a rule, double groove elevator saddles do not extend behind the partition.

The thickness of the doors governs the type of double groove section to be used. A space of $\frac{1}{4}$ " is generally allowed between doors.

As a rule, the saddle should be flush on the hall side with the jamb or finish within that line. If saddle projects beyond this line it is cut out to follow the lines of the jamb.

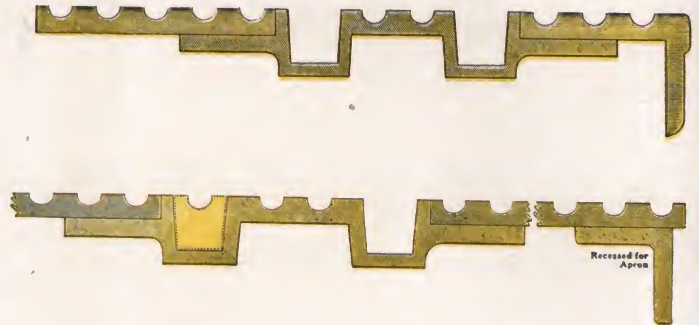


CONSTRUCTION OF BRONZE ELEVATOR SADDLE WITH SINGLE GROOVE

SINGLE GROOVE ELEVATOR SADDLES are generally used for elevator doors opening to the right or left, or center opening. The groove in which the door slides usually extends behind the partition.

The location of the grooves is determined by the thickness of the door, the type hanger and door closing device used and whether or not the partition wall is recessed to provide space for the sliding door.

Single groove elevator saddles are constructed by using one or more Flat Fluted Sections No. 4550 to No. 4559 of suitable width, together with Single Groove Section No. 4585. The dimensions of the over-all depth are governed by the thickness of the door jamb.

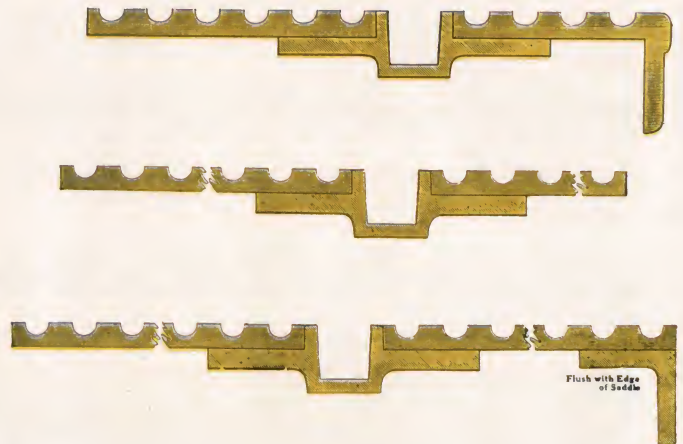

CONSTRUCTION OF BRONZE ELEVATOR SADDLE WITHOUT GROOVES

The method of constructing elevator saddles without grooves, with or without nosing, is practically the same as the construction of single groove elevator saddles.



The dimension from the shaft line to the center of the groove depends upon conditions in the elevator shaft. Usually, from $\frac{3}{4}$ " to $1\frac{1}{4}$ " clearance is allowed between the end of the saddle and the edge of the elevator cab.

When saddles of extreme width are to be constructed, two or more fluted flat sections, with or without nosing, may be used side by side or on end with a plate underneath. The pattern of all fluted sections being identical, the joint will not be apparent.

If a sheet metal apron is used within the shaft Section No. 4560, or 4561 is used, or nosing No. 4565, or an angle. If an angle is used, same may be fastened flush with the edge of the saddle or the angle is recessed sufficiently to receive the apron.

The sheet metal apron may be straight or bent at an angle according to conditions in the elevator shaft and may be fastened to the nosing or angle in front or in back. If fastened to the front, the nosing is sufficiently heavy to receive tap screws. If fastened to the back, the head of the screw or bolt is countersunk into the leg of the nosing or angle.


If no sheet metal apron is used, the angle or nosing acts as a plaster stop.

**NO BREAKAGE
NO PATTERNS**

**NO IMPERFECTIONS
LOW IN COST
NO MACHINING OF GROOVES NECESSARY**


**NO STRAIGHTENING
NO ERRORS**

Typical Construction of Door Saddles with cut-out for Floor Hinges

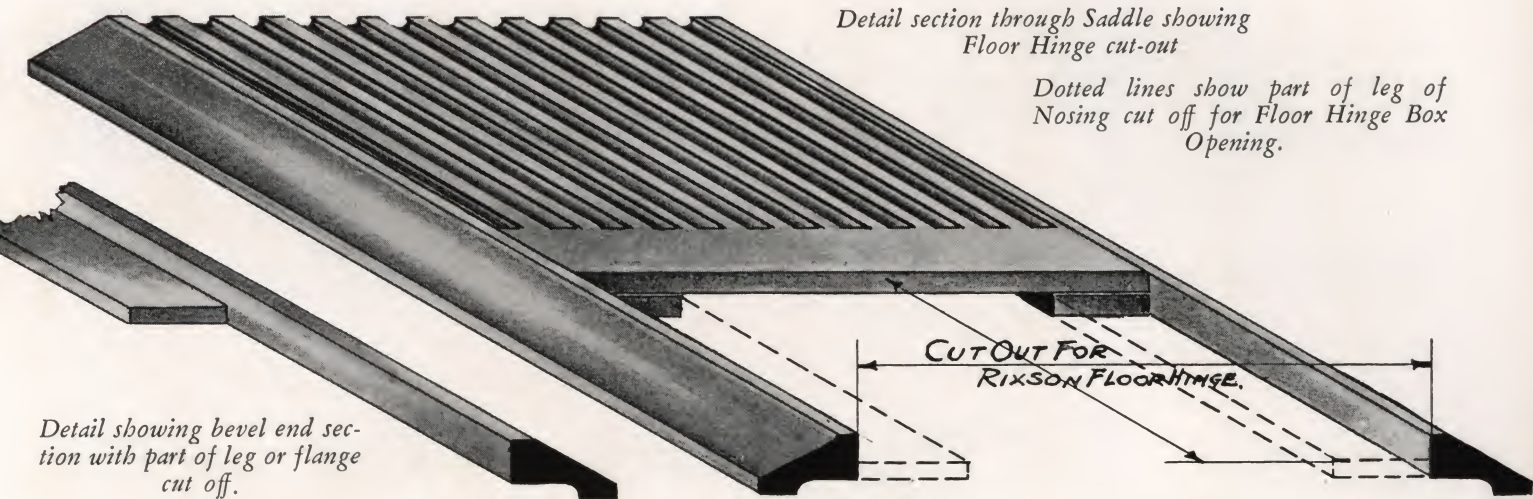


Thresholds with cut-outs for Mullions or Columns may be constructed easily and at low cost. The flat members (fluted or plain) may be cut out or notched out to fit the Mullion, Column or Jamb BEFORE assembling. Saddles constructed in this manner will fit perfectly and may be set at a minimum expense for field labor.

Typical Construction of Door Saddles with Box cut-outs for Floor Hinges and cut-out for Mullions or Columns

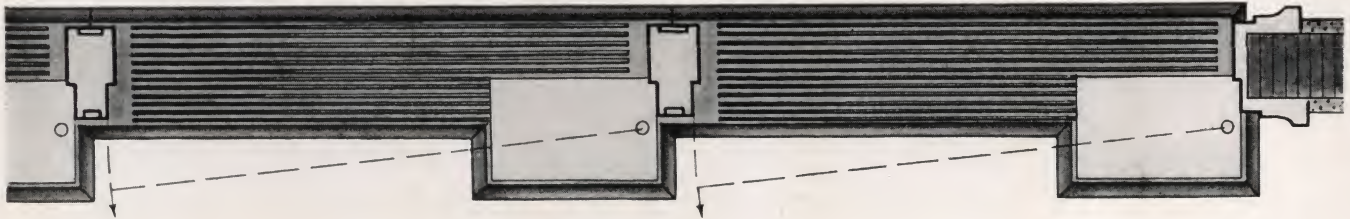

Typical Construction of Door Saddles with straight cut-out for Floor Hinges

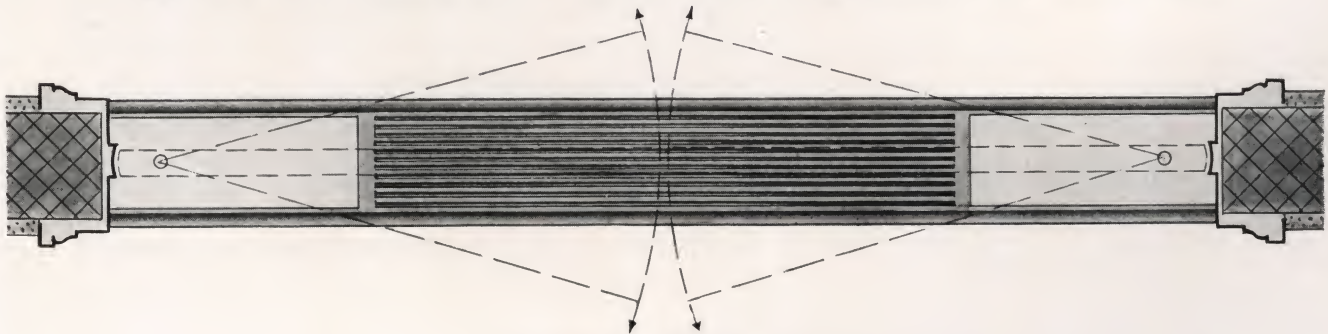

NO BREAKAGE
NO PATTERNS


NO IMPERFECTIONS
LOW IN COST

NO WAITING

NO STRAIGHTENING
NO ERRORS

Rolled Steel Saddle Sections for Elevator and Door Saddles



DOUBLE GROOVED SECTION
(FOR $1\frac{1}{4}$ " THICK DOORS)

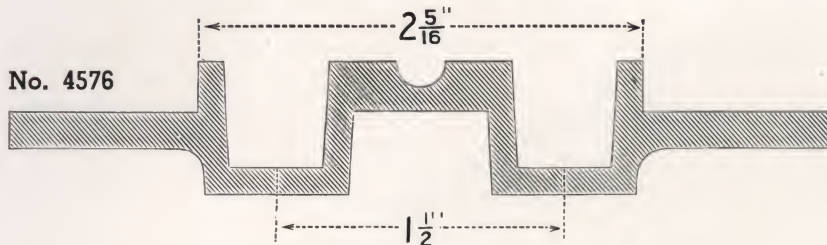


SINGLE GROOVED SECTIONS



(FOR $1\frac{1}{2}$ " THICK DOORS)

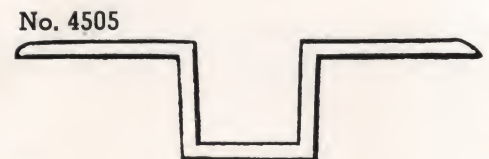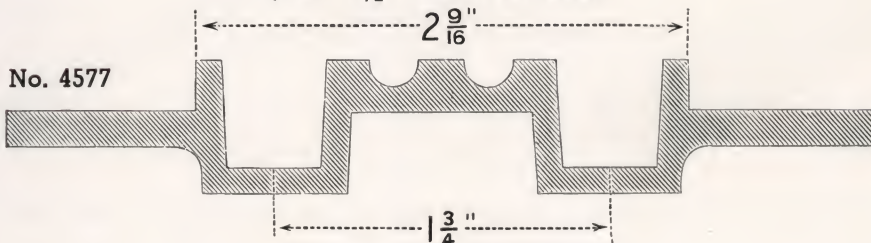

(FOR $1\frac{3}{4}$ " THICK DOORS)


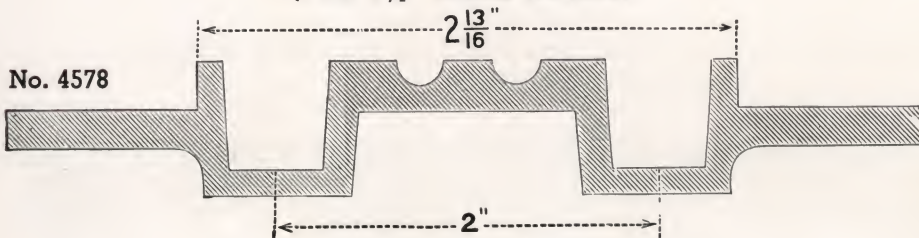


INSERT SECTION
No. 4587



For filling up part of groove and for door stop.

METHOD OF CONSTRUCTING SINGLE AND DOUBLE GROOVE SADDLES

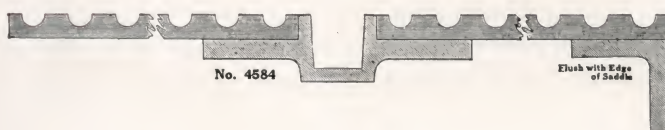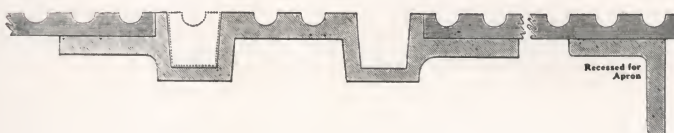

The thickness of the doors governs the type of double groove section to be used. As a rule, $\frac{1}{4}$ " clearance is allowed between doors.


If doors are slightly thicker or thinner, the pins on the bottom of door are set a trifle off center.

For details on construction and assembly see page 86 covering bronze grooved saddles. Steel and bronze sections used for this type saddle are similar in size and shape.




Rolled Steel Sections for the Construction of Elevator Saddles and Door Sills


No. 4540

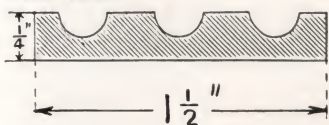


No. 4546

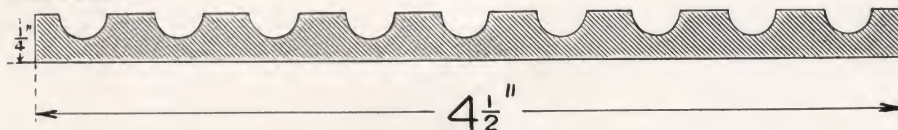


No. 4541

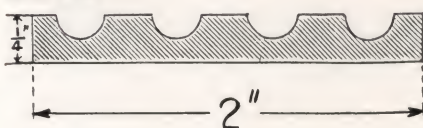


No. 4545

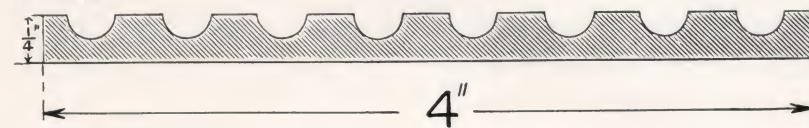


No. 4542

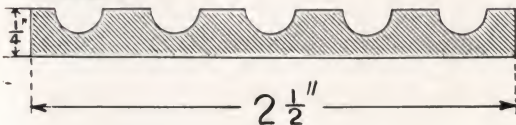

No. 4544

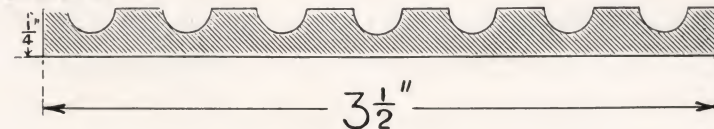


No. 4543

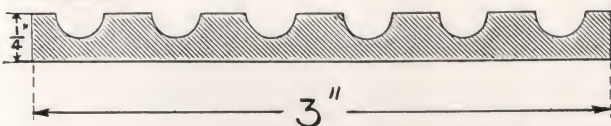


BEVEL END PIECE


No. 4237

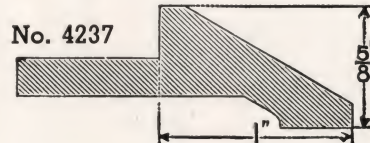

No. 4549

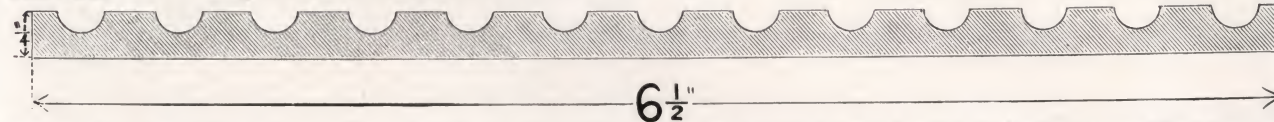

When door saddles of extreme depths or lengths are to be constructed, two or more fluted flat sections may be used side by side or on end with a plate underneath. The pattern of all fluted sections being identical, the joint will not be apparent.

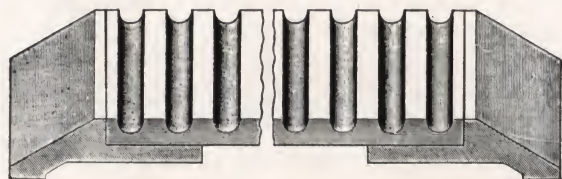

Showing method by which ROLLED STEEL DOOR SADDLES of any depth or width or length, with or without panels, may be constructed by using Bevel End Piece No. 4237 together with Flat Fluted Sections.

ROOF DOOR SADDLE




DOOR SADDLE WITH GROOVE FOR SLIDING DOORS




Saddles with double grooves (for double doors or screen doors) may be constructed in similar manner by using Double Groove Sections Nos. 4576, 4577 or 4578.

Typical Construction of Door Saddles with cut-out for Floor Hinges

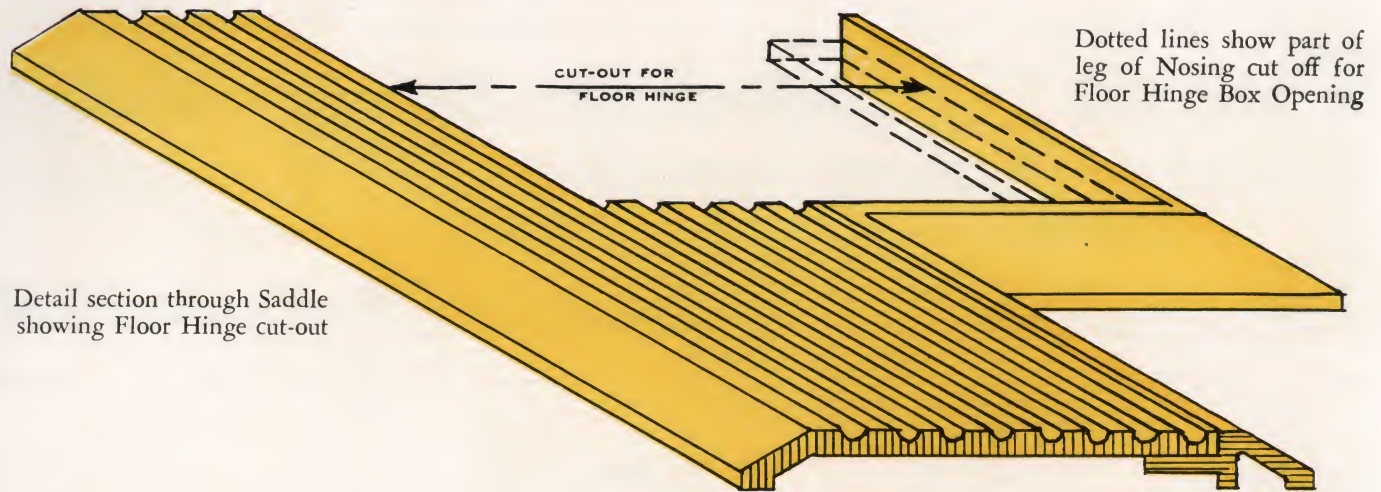

Assembled Architectural Bronze Door Saddle Sections

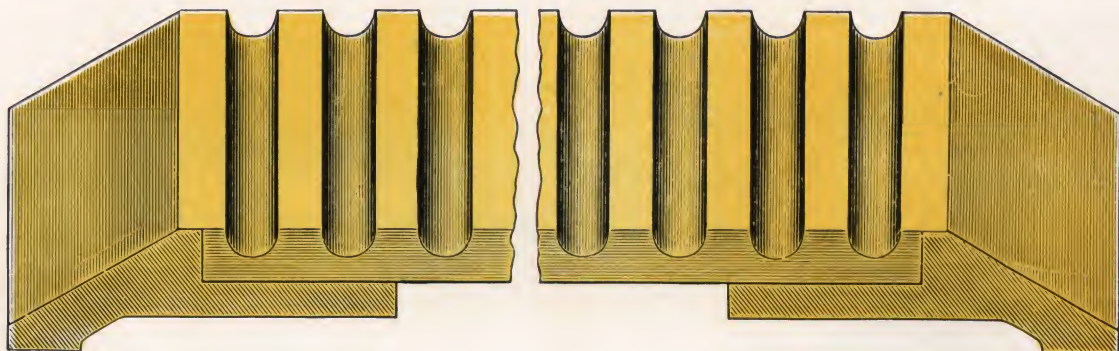

ASSEMBLED DOOR SADDLE



ASSEMBLED ROOF DOOR SADDLE



ASSEMBLED DOOR SADDLE WITH GROOVE



Architectural Bronze Saddles of odd sizes or for installations requiring special types of construction are easily assembled from our stock sections.


These illustrations show a few typical forms of commonly used saddles. Saddles constructed in this manner are straight and true in alignment and accurate dimensions are easy to maintain.

No delays are involved in making up such special saddles and pattern costs are eliminated.


It is a simple matter to select from our large variety of shapes the sections necessary for the assembly of practically any type of saddle.

Sections for the Construction of Door Saddles with Cut-Outs for Floor Hinges

ARCHITECTURAL BRONZE

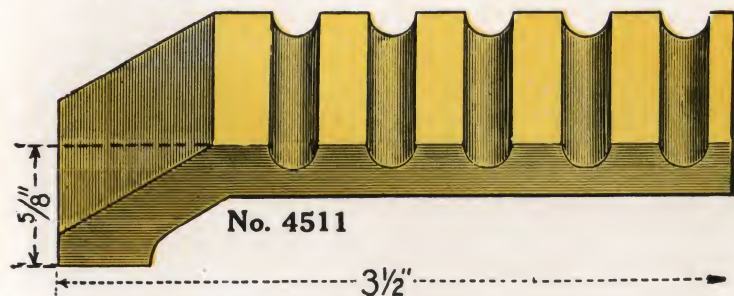


ARCHITECTURAL BRONZE

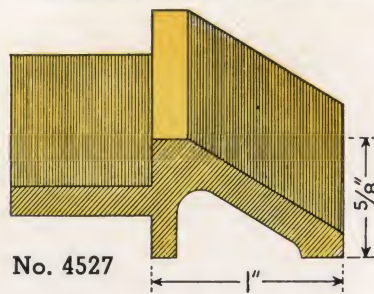


The leg or flange of Bevel End Nosing No. 4527 acts as support for the fluted section. This leg is notched out according to the size of the FLOOR HINGE BOX. See Illustration, Pages 87 and 90.

ARCHITECTURAL BRONZE

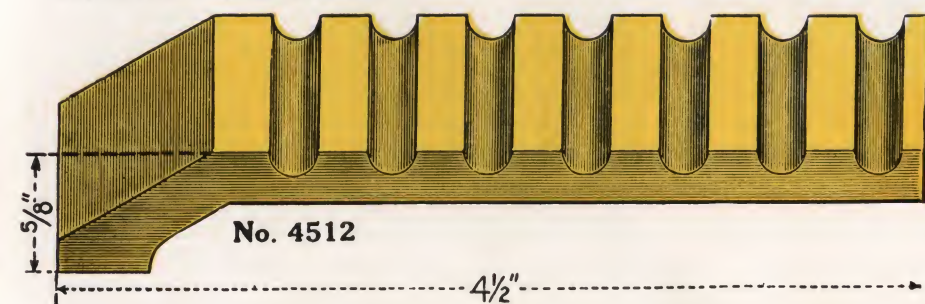


ARCHITECTURAL BRONZE

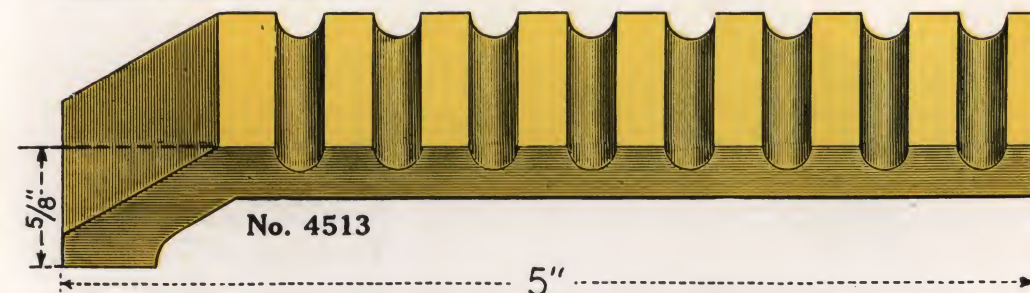

Bronze
1/4" Half Round
For Filling in Grooves




Showing method by which Architectural Bronze Door Saddles with or without cut-out for floor hinges may be constructed. To assemble Architectural Bronze Door Saddles of this type use sections Nos. 4511, 4512 or 4513 with Bevel End Nosing No. 4527.

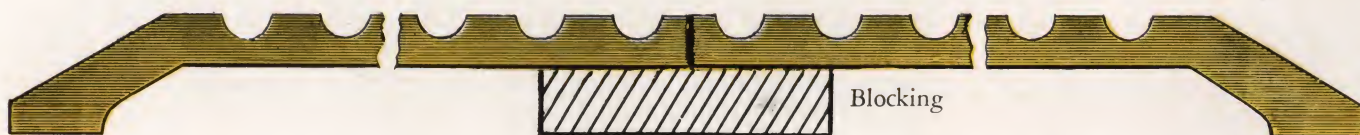


Showing method by which extra wide Architectural Bronze Door Saddles with or without cut-out for floor hinges may be constructed by using sections Nos. 4511, 4512 or 4513. For Floor Hinge Boxes at ends use Bevel End Nosing No. 4527. For Detail, See Page 90.

TYPICAL CONSTRUCTION OF ELEVATOR SADDLES

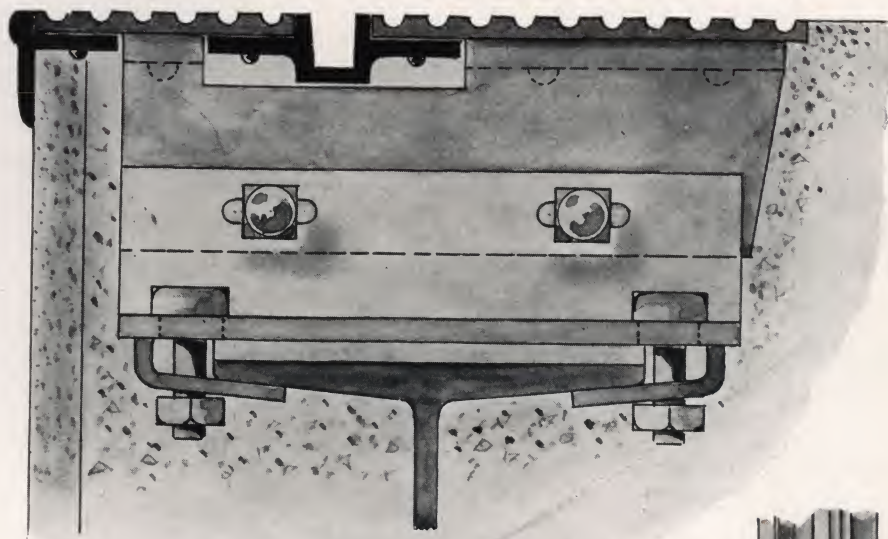


Showing
Construction of
Single Groove
Elevator Saddle

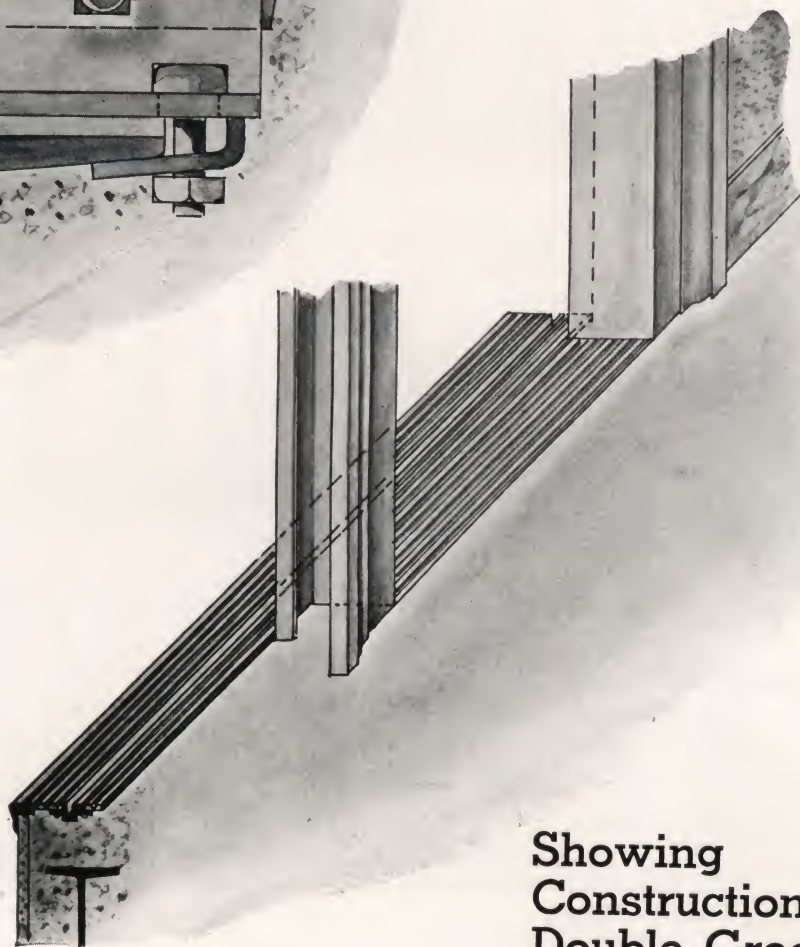

Showing
Construction of
Double Groove
Elevator Saddle


For erecting Elevator Saddles we recommend two angles, each with slotted holes, fastened in the shape of a Z to the bottom of the saddle. The legs of the bottom angles are fastened to the floor beam or channel, the saddle is then leveled between the jamb, the bolts and nuts connecting the two Z-shaped angles are tightened and the concrete flushed underneath.

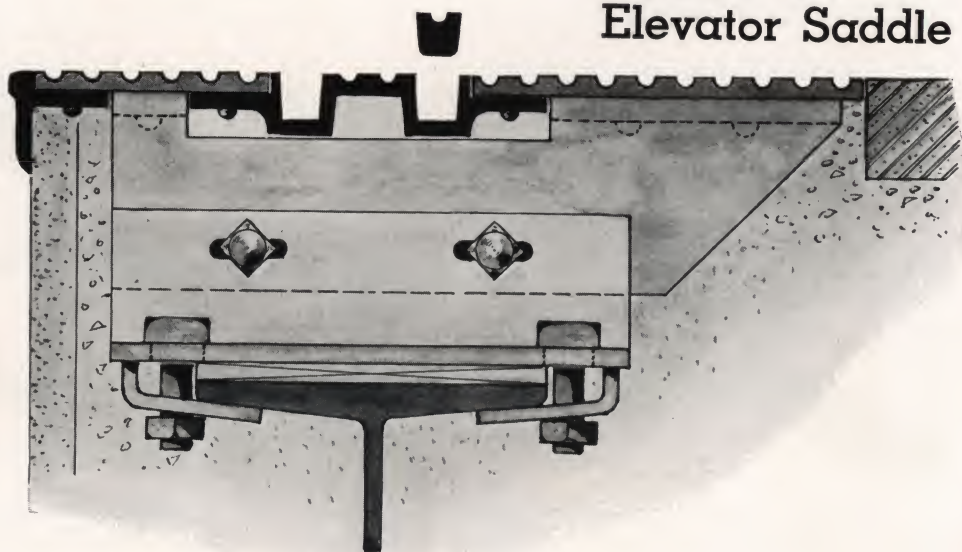

HOT ROLLED STEEL ELEVATOR SADDLE

ROLLED IN ONE PIECE

No. 4517

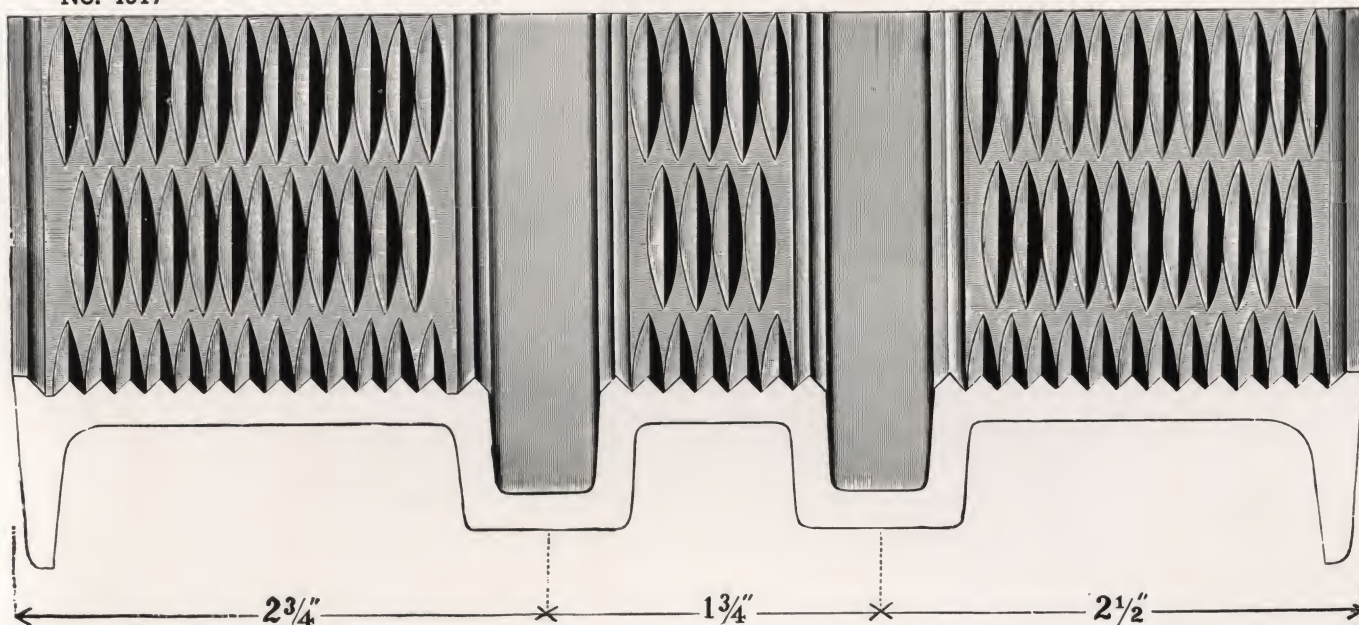

ROLLED STEEL ELEVATOR SADDLE No. 4517 (with two grooves) may be used for single or double type sliding doors of various thicknesses, opening from center or sideways, operating on single or two speed hangers.

If necessary to close up part or all of one of the slots, filler section No. 4518, which fits snugly into either groove, may be used for this purpose.

ROLLED STEEL ELEVATOR SADDLE No. 4517 is reversible. Sufficient room is allowed on the 2 3/4" side for installation of door closing device.

Position or thickness of sliding doors may vary. Practically all conditions can be met by placing the pins at bottom of doors slightly off center.

The nosing on the side of the elevator shaft is slightly tilted in and beveled. This member acts as a lock for the plaster finish or it will receive the sheet steel facia or apron. Sufficient room is allowed for bolting the sheet to the *inside* of the nosing, thereby assuring a clean and neat finish.


Our ROLLED STEEL ELEVATOR SADDLE No. 4517 is rolled true and smooth of best soft steel. It is strong and durable, cannot break, non-slipping, neat in appearance and requires no upkeep. The grooves or slots being rolled smooth and even, dirt does not collect and they may be kept clean easily. As a result doors will hang right, will not rattle and will operate easily and noiselessly.

ROLLED STEEL ELEVATOR SADDLES are carried in stock in long bars; can also be furnished cut to specified length.

No. 4518



Filler Section No. 4518 fits snugly into either groove of Saddle No. 4517

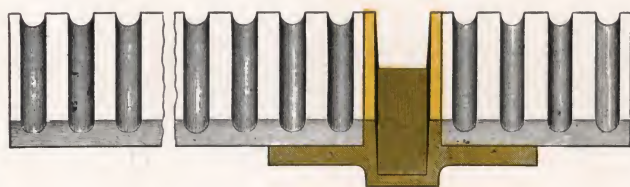

Showing a single groove elevator saddle constructed by means of hot rolled steel flat fluted sections of suitable width in conjunction with Architectural Bronze single groove section No. 4585. Double groove sections No. 4580, 4581, 4582 may be used in the same manner.

Saddles constructed in this manner are good in appearance and the perfect, smooth and true Architectural Bronze groove insures noiseless operation of elevator doors.

MEMORANDUM

SUPPLEMENTAL DATA AND ILLUSTRATIONS MAY BE PASTED ON THIS PAGE


TUBING & SHAPES

JULIUS BLUM & CO., Inc. has long been recognized as a leading supplier of **Square and Rectangular Cold Drawn and Hot Rolled Tubing** for every type of architectural and industrial use. We carry in stock a complete range of commercial sizes in both light gauge and heavy wall tubing and can furnish special sizes on short notice. Square and Rectangular Tubing is furnished in long bars or cut to specified lengths.

The Shapes shown on the following pages include **Square Root Cold Drawn Angles and Deep Channels**. These Sections, as well as the other Shapes illustrated, are designed to meet the frequent demands for special type sections in structural and decorative construction.

We are also in a position to furnish special shapes and solicit your inquiries for any such requirements for special needs.

Cold Drawn Mechanical Steel Tubing

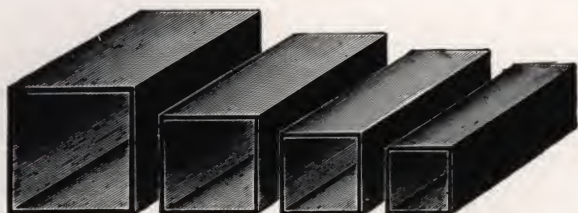

SQUARE


$\frac{3}{8}$ "	x	$\frac{3}{8}$ "	x	No. 18	B W G
$\frac{1}{2}$ "	x	$\frac{1}{2}$ "	x	"	18
$\frac{1}{2}$ "	x	$\frac{1}{2}$ "	x	"	16
$\frac{5}{8}$ "	x	$\frac{5}{8}$ "	x	"	16
$\frac{3}{4}$ "	x	$\frac{3}{4}$ "	x	"	16
$\frac{7}{8}$ "	x	$\frac{7}{8}$ "	x	"	16
1 "	x	1 "	x	"	20
1 "	x	1 "	x	"	18
1 "	x	1 "	x	"	16
$1\frac{1}{8}$ "	x	$1\frac{1}{8}$ "	x	"	16
$1\frac{1}{4}$ "	x	$1\frac{1}{4}$ "	x	"	16
$1\frac{1}{4}$ "	x	$1\frac{1}{4}$ "	x	"	14
$1\frac{1}{2}$ "	x	$1\frac{1}{2}$ "	x	"	20
$1\frac{1}{2}$ "	x	$1\frac{1}{2}$ "	x	"	16
$1\frac{1}{2}$ "	x	$1\frac{1}{2}$ "	x	"	14
$1\frac{3}{4}$ "	x	$1\frac{3}{4}$ "	x	"	14
2 "	x	2 "	x	"	16
2 "	x	2 "	x	"	14
$2\frac{1}{2}$ "	x	$2\frac{1}{2}$ "	x	"	14
3 "	x	3 "	x	"	16
3 "	x	3 "	x	"	14
3 "	x	3 "	x	"	10
3 "	x	3 "	x	"	7
$3\frac{1}{2}$ "	x	$3\frac{1}{2}$ "	x	"	7
4 "	x	4 "	x	"	10
4 "	x	4 "	x	"	7

COLD DRAWN SEAMLESS SQUARE STEEL TUBING

(Soft Annealed)

$\frac{3}{8}$ "	x	$\frac{3}{8}$ "	x	No. 20	B.W.G.
$\frac{1}{2}$ "	x	$\frac{1}{2}$ "	x	"	20
$\frac{5}{8}$ "	x	$\frac{5}{8}$ "	x	"	20
$\frac{3}{4}$ "	x	$\frac{3}{4}$ "	x	"	20

Seamless Square Steel Tubing, on account of its soft anneal, lends itself advantageously to bending, twisting and shaping operations.

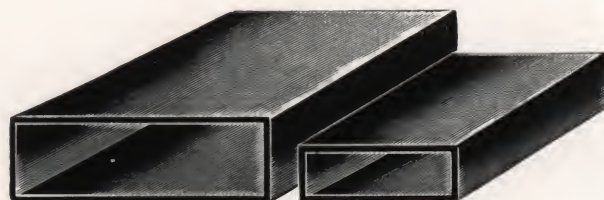


RECTANGULAR

$\frac{3}{8}$ "	x	$\frac{3}{4}$ "	x	No. 16	B W G
$\frac{3}{8}$ "	x	1 "	x	"	16
$\frac{5}{8}$ "	x	2 "	x	"	14
$\frac{3}{4}$ "	x	$\frac{3}{8}$ "	x	"	16
$\frac{3}{4}$ "	x	$1\frac{1}{2}$ "	x	"	14
1 "	x	$\frac{3}{8}$ "	x	"	16
1 "	x	$1\frac{1}{2}$ "	x	"	14
1 "	x	2 "	x	"	14
1 "	x	$2\frac{1}{2}$ "	x	"	14
1 "	x	3 "	x	"	14
1 "	x	$3\frac{1}{2}$ "	x	"	14
$1\frac{1}{4}$ "	x	$1\frac{3}{4}$ "	x	"	14
$1\frac{1}{4}$ "	x	2 "	x	"	14
$1\frac{1}{4}$ "	x	$2\frac{1}{2}$ "	x	"	16
$1\frac{1}{4}$ "	x	$2\frac{1}{2}$ "	x	"	14
$1\frac{1}{4}$ "	x	3 "	x	"	14
$1\frac{1}{4}$ "	x	$3\frac{1}{2}$ "	x	"	14
$1\frac{1}{2}$ "	x	$\frac{3}{4}$ "	x	"	14
$1\frac{1}{2}$ "	x	1 "	x	"	14
$1\frac{1}{2}$ "	x	2 "	x	"	14
$1\frac{1}{2}$ "	x	$2\frac{1}{2}$ "	x	"	14
$1\frac{1}{2}$ "	x	3 "	x	"	16
$1\frac{1}{2}$ "	x	3 "	x	"	14
$1\frac{1}{2}$ "	x	$3\frac{1}{2}$ "	x	"	14
$1\frac{3}{4}$ "	x	$1\frac{1}{4}$ "	x	"	14
2 "	x	$\frac{5}{8}$ "	x	"	14
2 "	x	1 "	x	"	14
2 "	x	$1\frac{1}{4}$ "	x	"	14
2 "	x	$1\frac{1}{2}$ "	x	"	14
2 "	x	3 "	x	"	14
2 "	x	4 "	x	"	14
$2\frac{1}{2}$ "	x	1 "	x	"	14
$2\frac{1}{2}$ "	x	$1\frac{1}{4}$ "	x	"	16
$2\frac{1}{2}$ "	x	$1\frac{1}{4}$ "	x	"	14
$2\frac{1}{2}$ "	x	$1\frac{1}{2}$ "	x	"	14
3 "	x	1 "	x	"	14
3 "	x	$1\frac{1}{4}$ "	x	"	14
3 "	x	$1\frac{1}{2}$ "	x	"	16
3 "	x	$1\frac{1}{2}$ "	x	"	14
3 "	x	2 "	x	"	14
$3\frac{1}{2}$ "	x	1 "	x	"	14
$3\frac{1}{2}$ "	x	$1\frac{1}{4}$ "	x	"	14
$3\frac{1}{2}$ "	x	$1\frac{1}{2}$ "	x	"	14
4 "	x	2 "	x	"	14

OUTSIDE MEASUREMENTS

Square and rectangular steel tubing is carried in stock in long random lengths up to 20 feet.
Can also be furnished cut to specified lengths.

Heavy Wall Square and Rectangular Steel Tubing

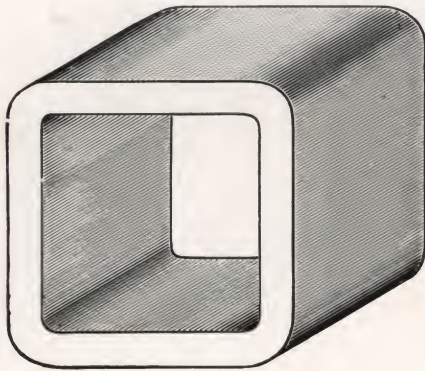


SQUARE

1 " x 1 " x $\frac{1}{8}$ " WALL
1 " x 1 " x $\frac{3}{16}$ "
1 $\frac{1}{4}$ " x 1 $\frac{1}{4}$ " x .135"
1 $\frac{1}{4}$ " x 1 $\frac{1}{4}$ " x $\frac{3}{16}$ "
1 $\frac{1}{2}$ " x 1 $\frac{1}{2}$ " x $\frac{9}{64}$ "
1 $\frac{1}{2}$ " x 1 $\frac{1}{2}$ " x $\frac{3}{16}$ "
1 $\frac{1}{2}$ " x 1 $\frac{1}{2}$ " x $\frac{1}{4}$ "
2 " x 2 " x .145"
2 " x 2 " x $\frac{3}{16}$ "
2 " x 2 " x $\frac{1}{4}$ "
2 $\frac{1}{2}$ " x 2 $\frac{1}{2}$ " x $\frac{3}{16}$ "
3 " x 3 " x $\frac{1}{8}$ "
3 " x 3 " x $\frac{3}{16}$ "
3 " x 3 " x $\frac{1}{4}$ "
3 $\frac{1}{2}$ " x 3 $\frac{1}{2}$ " x $\frac{3}{16}$ "
4 " x 4 " x .134"
4 " x 4 " x $\frac{3}{16}$ "
4 " x 4 " x $\frac{1}{4}$ "


COLD DRAWN

HEXAGON STEEL TUBING

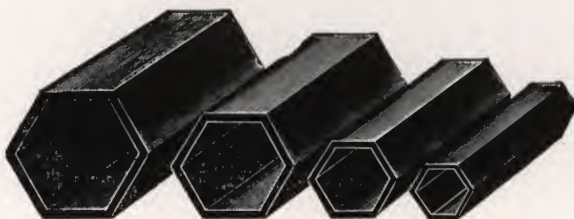

(Measurements are taken across flat sides)

$\frac{5}{8}$ " x 20 B.W.G.
$\frac{3}{4}$ " x 20 B.W.G.
$\frac{7}{8}$ " x 20 B.W.G.
1 $\frac{1}{8}$ " x 20 B.W.G.

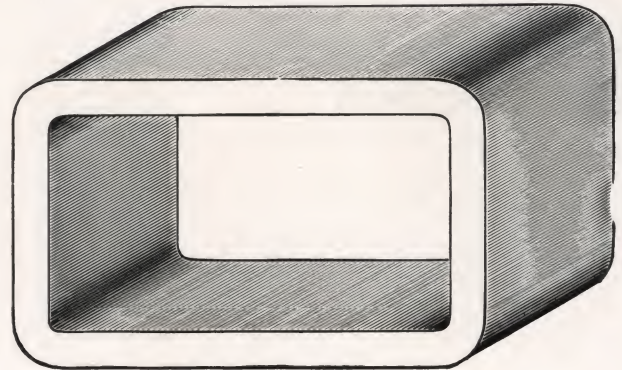

RECTANGULAR

2 " x 1 $\frac{1}{2}$ " x $\frac{9}{64}$ " WALL
2 $\frac{1}{2}$ " x 1 $\frac{1}{2}$ " x .145"
3 " x 2 " x $\frac{3}{16}$ "
4 " x 3 " x $\frac{3}{16}$ "
6 " x 3 " x $\frac{3}{16}$ "
6 " x 4 " x $\frac{3}{16}$ "
8 " x 3 " x $\frac{3}{16}$ "
8 " x 4 " x $\frac{3}{16}$ "

**OUTSIDE
MEASUREMENTS**

**WE CARRY IN STOCK
POST CAPS**

for structural steel tubing from 1 $\frac{1}{2}$ " square to 4" square and from 4" x 3" rectangular to 8" x 4" rectangular. See Page 28.

**COLD DRAWN
TWISTED SQUARE STEEL TUBING**



$\frac{1}{2}$ " x $\frac{1}{2}$ " x 20 gauge	1 " x 1 " x 20 B.W.G.
$\frac{5}{8}$ " x $\frac{5}{8}$ " x 20 gauge	1 $\frac{1}{4}$ " x 1 $\frac{1}{4}$ " x 20 B.W.G.
$\frac{3}{4}$ " x $\frac{3}{4}$ " x 20 gauge	1 $\frac{1}{2}$ " x 1 $\frac{1}{2}$ " x 18 B.W.G.
$\frac{7}{8}$ " x $\frac{7}{8}$ " x 20 gauge	2 " x 2 " x 18 B.W.G.

ARCHITECTURAL BRONZE SHAPESAll shapes are *square edge* and *square root***Channels**

$\frac{1}{2}$ "	x	$\frac{1}{2}$ "	x	$\frac{3}{8}$ "
1"	x	$\frac{1}{2}$ "	x	$\frac{1}{8}$ "
$1\frac{1}{4}$ "	x	$\frac{5}{8}$ "	x	$\frac{1}{8}$ "
$1\frac{1}{2}$ "	x	$\frac{5}{8}$ "	x	$\frac{1}{8}$ "
2"	x	$\frac{3}{4}$ "	x	$\frac{1}{8}$ "
$2\frac{1}{4}$ "	x	$\frac{7}{8}$ "	x	$\frac{1}{8}$ "

Tees

$\frac{3}{4}$ "	x	$\frac{3}{4}$ "	x	$\frac{1}{8}$ "
1"	x	1"	x	$\frac{1}{8}$ "

Flats

$\frac{1}{2}$ "	x	$\frac{1}{8}$ "
$\frac{1}{2}$ "	x	$\frac{3}{16}$ "
$\frac{5}{8}$ "	x	$\frac{1}{8}$ "
$\frac{5}{8}$ "	x	$\frac{3}{16}$ "
$\frac{5}{8}$ "	x	$\frac{1}{4}$ "
$\frac{3}{4}$ "	x	$\frac{1}{8}$ "
$\frac{3}{4}$ "	x	$\frac{3}{16}$ "
$\frac{3}{4}$ "	x	$\frac{1}{4}$ "
1"	x	$\frac{1}{8}$ "
1"	x	$\frac{3}{16}$ "
1"	x	$\frac{1}{4}$ "

$1\frac{1}{4}$ "	x	$\frac{1}{8}$ "
$1\frac{1}{4}$ "	x	$\frac{3}{16}$ "
$1\frac{1}{2}$ "	x	$\frac{1}{8}$ "
$1\frac{1}{2}$ "	x	$\frac{3}{16}$ "
2"	x	$\frac{1}{8}$ "
2"	x	$\frac{3}{16}$ "
$2\frac{1}{2}$ "	x	$\frac{3}{16}$ "
3"	x	$\frac{3}{16}$ "
3"	x	$\frac{1}{4}$ "

**Angles**

$\frac{1}{2}$ "	x	$\frac{1}{2}$ "	x	$\frac{1}{8}$ "
$\frac{5}{8}$ "	x	$\frac{5}{8}$ "	x	$\frac{1}{8}$ "
$\frac{3}{4}$ "	x	$\frac{3}{4}$ "	x	$\frac{1}{8}$ "
1"	x	1"	x	$\frac{1}{8}$ "
1"	x	1"	x	$\frac{3}{16}$ "
$1\frac{1}{4}$ "	x	$1\frac{1}{4}$ "	x	$\frac{1}{8}$ "
$1\frac{1}{2}$ "	x	$1\frac{1}{2}$ "	x	$\frac{1}{8}$ "
2"	x	2"	x	$\frac{1}{8}$ "

Squares $\frac{3}{8}$ " — $\frac{1}{2}$ " — $\frac{5}{8}$ " — $\frac{3}{4}$ " — 1" — $1\frac{1}{4}$ "**SEAMLESS DRAWN ARCHITECTURAL BRONZE SQUARE AND RECTANGULAR TUBING****Square**

$\frac{1}{2}$ "	x	No. 16	B. W. G.
$\frac{5}{8}$ "	x	No. 16	"
$\frac{3}{4}$ "	x	No. 16	"
1"	x	No. 16	"
$1\frac{1}{4}$ "	x	No. 14	"
$1\frac{1}{2}$ "	x	No. 14	"
2"	x	No. 14	"

Rectangular

OUTSIDE	2"	x	1"	x	No. 14	B. W. G.
MEASUREMENTS	$2\frac{1}{2}$ "	x	$1\frac{1}{4}$ "	x	No. 14	"
	3"	x	$1\frac{1}{2}$ "	x	No. 14	"
	3"	x	2"	x	No. 14	"


We can furnish *from mill* a large variety of sizes and gauges of square and rectangular Architectural Bronze Tubing.

ARCHITECTURAL ALUMINUM CHANNELS

ALL ARE SQUARE EDGE AND SQUARE ROOT

$\frac{1}{2}$ "	x	$\frac{1}{2}$ "	x	$\frac{3}{8}$ "
1"	x	$\frac{1}{2}$ "	x	$\frac{1}{8}$ "
$1\frac{1}{4}$ "	x	$\frac{5}{8}$ "	x	$\frac{1}{8}$ "

$1\frac{1}{2}$ "	x	$\frac{5}{8}$ "	x	$\frac{1}{8}$ "
$2\frac{1}{4}$ "	x	$\frac{7}{8}$ "	x	$\frac{1}{8}$ "

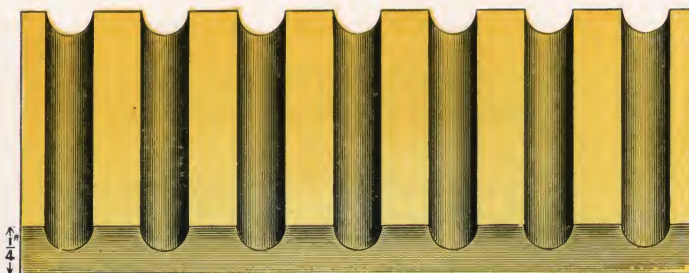Flat Fluted Sections**ARCHITECTURAL BRONZE**

No. 4558— $1\frac{1}{2}$ "	wide	No. 4553Q— $4\frac{1}{4}$ "	wide
4557—2"	"	4552— $4\frac{1}{2}$ "	"
4556— $2\frac{1}{2}$ "	"	4551—5"	"
4555—3"	"	4550— $5\frac{1}{2}$ "	"
4554— $3\frac{1}{2}$ "	"	4559— $6\frac{1}{8}$ "	"
4553—4"	"		

Architectural Bronze Flat Fluted Sections may be used for many practical and decorative purposes such as:

For Pilasters and Mullions


For Edge Protection

For Decorative Trim

For the construction of Elevator Saddles and Thresholds see pages 86, 87.

For details of all sizes see page 85.

COLD DRAWN STEEL ANGLES

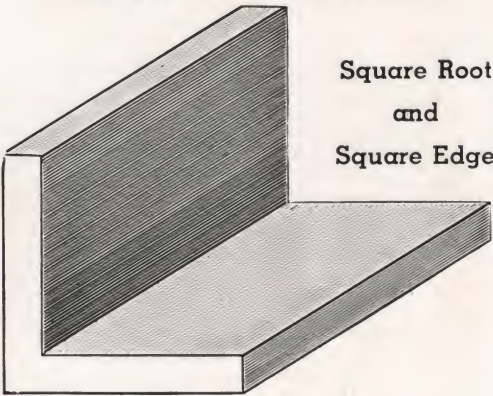

- 1/2" x 1/2" x 1/8"
- 5/8" x 5/8" x 1/8"
- 3/4" x 3/4" x 1/8"
- 1" x 5/8" x 1/8"
- 1" x 1" x 1/8"
- 1 1/4" x 1 1/4" x 1/8"
- 1 1/4" x 1 1/4" x 3/16"
- 1 1/2" x 1 1/2" x 1/8"
- 1 1/2" x 1 1/2" x 3/16"
- 2" x 1" x 1/8"
- 2" x 2" x 1/8"
- 2" x 2" x 3/16"
- 2 1/2" x 2 1/2" x 3/16"
- 3" x 3" x 3/16"

120° HOT ROLLED STEEL ANGLES

No. 4639

.72 lb.

No. 4646

1.11 lb.

No. 4647

1.58 lb.

No. 4648

2.50 lb.

SQUARE ROOT HOT ROLLED STEEL ANGLES

No. 4700

No. 4701

No. 4702

No. 4709

SQUARE ROOT HOT ROLLED STEEL ANGLES
UNEQUAL LEG

No. 4710

No. 4711

No. 4712

No. 4713

No. 4714


No. 4715

ORNAMENTS
MISCELLANEOUS


No. 4771




No. 4773




No. 4772




No. 4618




Method of constructing: Glass Frame with Moulding No. 4618 and Flat Bar.

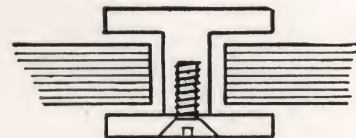


No. 4722

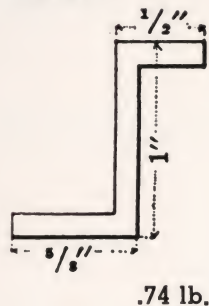


No. 4721

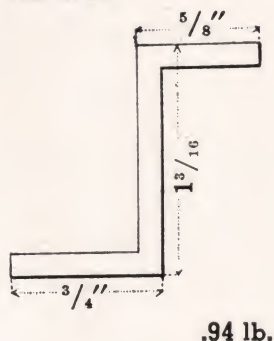


No. 4720

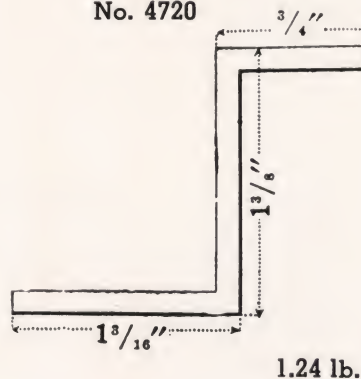


No. 4655

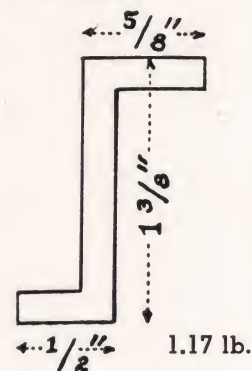


No. 4656

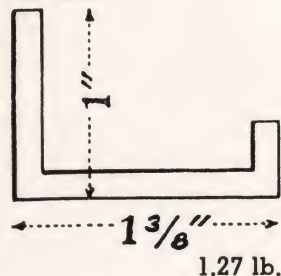


No. 4650




No. 4505

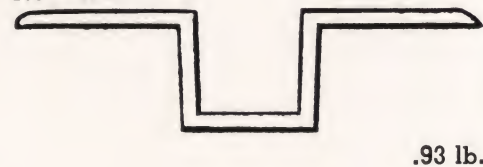


No. 4460



No. 4470




No. 4584

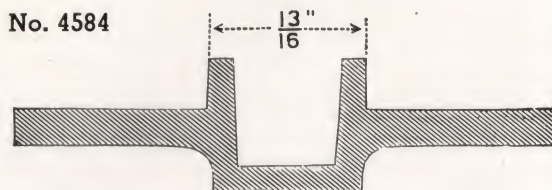


COLD ROLLED STEEL HALF ROUNDS



WIDTH — $\frac{1}{2}$ "
HEIGHT — $\frac{1}{4}$ "



WIDTH — $\frac{5}{8}$ "
HEIGHT — $\frac{5}{16}$ "




WIDTH — $\frac{3}{4}$ "
HEIGHT — $\frac{3}{8}$ "




WIDTH — 1"
HEIGHT — $\frac{1}{2}$ "

ROLLED STEEL CHANNELS

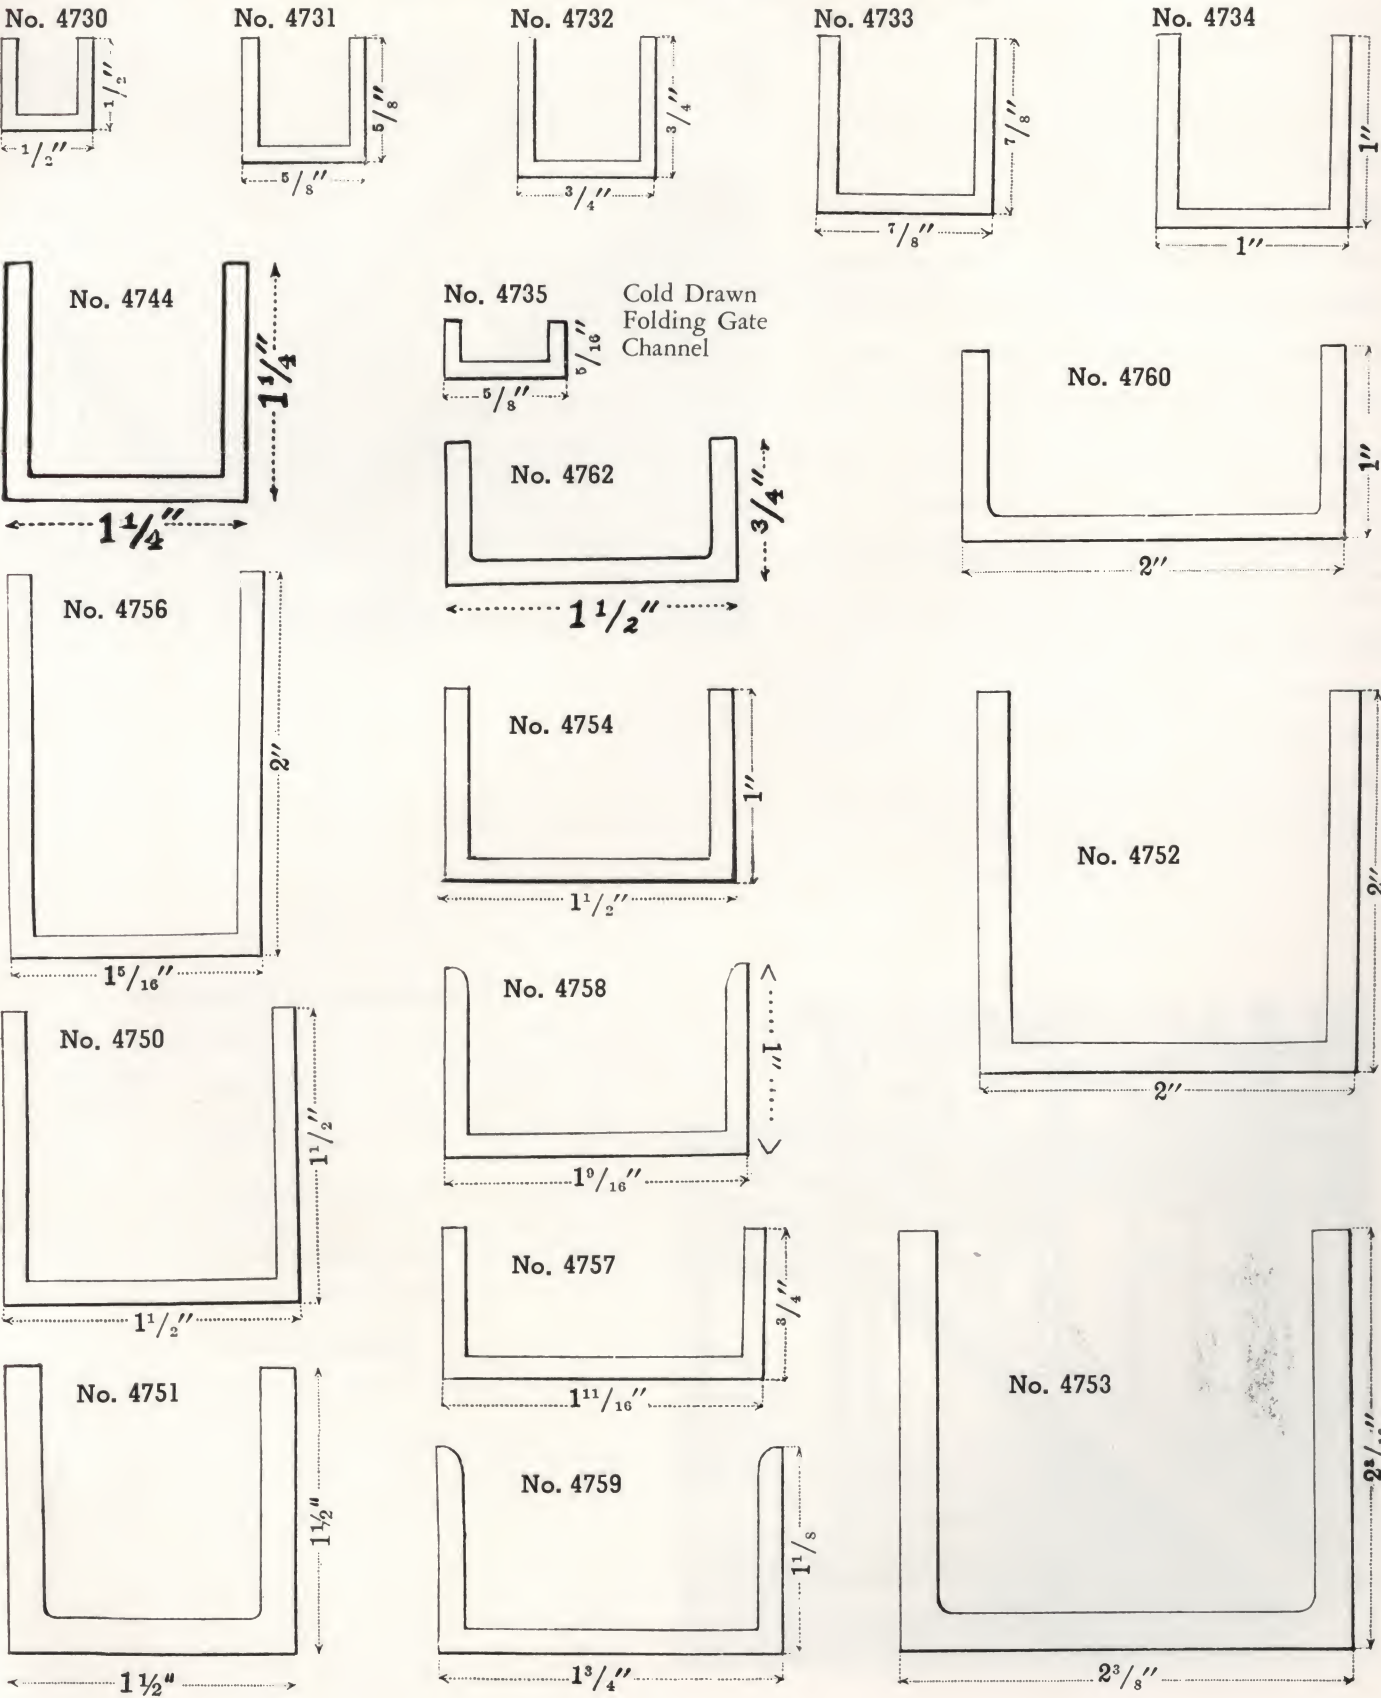

J & L JUNIOR 10" AND 12" STEEL STAIR CHANNELS

J & L Junior Channels are exclusive Jones & Laughlin rolled steel channel sections available in three sizes: 10" 6.5 lb., 10" 8.4 lb. and 12" 10.6 lb. per foot. These channels weigh much less than the lightest standard structural channel of equal depth; yet embody all of the characteristics of true form, and constancy of dimension offered by a hot rolled section. They are much stronger than formed plate channels of equal weight and in addition assure perfect fitting square corners and true lines. With these exclusive advantages you can design minimum steel weight, at low steel cost, without sacrificing structural strength. Handling and fabrication also are facilitated by the reduced weight.

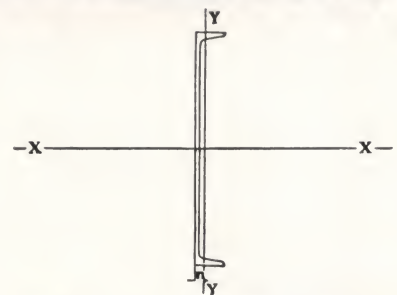

Functions of Sections

Section No.	Depth of Channel and Wt. per Ft. Lbs.	Area Sq. In.	Axis X-X (Perpendicular to Web)			Axis Y-Y (Parallel to Web)			
			I	S	r	n'	I'	S'	r'
C-758	10"- 6.5	1.91	22.1	4.4	3.47	.19	.12	.13	.25
C-752	10"- 8.4	2.47	32.3	6.5	3.61	0.29	0.33	0.28	0.37
C-700	12"-10.6	3.12	55.8	9.3	4.23	0.27	0.39	0.32	0.35

Dimensions

Section Index	Depth of Channel, Inches	Weight per Foot, Pounds	Flange Width		Web Thickness	
			Inches and Decimal Parts	Inches and Fractional Parts	Decimal Parts of an Inch	Fractional Parts of an Inch
C-758	10	6.50	1.125	1 $\frac{1}{8}$.150	$\frac{3}{16}$
C-752	10	8.4	1.500	1 $\frac{1}{2}$.170	$\frac{11}{64}$
C-700	12	10.6	1.500	1 $\frac{1}{2}$.190	$\frac{3}{16}$



ORNAMENTS

MANY forms of construction require decorative effects which also serve a practical purpose.

It is not convenient to list in this catalog the large variety of ornaments which Julius Blum & Co., Inc. carries in stock. These include Forged and Pressed Steel Rosettes, Leaves, Cups, Husks, Candle Pans, Flowers, Gallery Mouldings, Crestings, etc.

We would suggest that you send us drawings of the pieces required and we will be pleased to submit a full size drawing or sample for your approval.

Fabricators and Designers of Ornamental Metal, Metal Furniture, Lighting Fixtures, Fire Screens, Signs, Hardware, Radiator Enclosures, Cabinets, Flower Stands and Novelties will find opportunities for creative design and numerous applications in this selection of JULIUS BLUM products.

APPLIED DESIGNS

Ornamentation of exceptionally fine character may be achieved by using APPLIED DESIGNS and ROSETTES, together with Mouldings and Shapes. Some examples, illustrating how this material may be advantageously used for the construction of Store Fronts, Bank Screens, Posts, etc., are shown on Pages Nos. 60, 74 and 106.

APPLIED DESIGNS may be used for decorative purposes for almost any kind of ornamental work, for furniture, signs, mirrors, etc., also for panels in marble, wood, plaster, etc.

ALL APPLIED DESIGNS and ROSETTES shown can be furnished from stock in *CAST IRON*, *ARCHITECTURAL BRONZE* and *ALUMINUM*.

APPLIED DESIGNS are a *finished product*, requiring no further labor than drilling and fitting together.

APPLIED DESIGNS — ROSETTES



No. 6201

No. 6202

No. 6203

Illustrations are shown ONE-THIRD actual size

APPLIED DESIGNS as shown may be used in short sections (by finishing end pieces) or as a continuous pattern. Corners may be formed by mitering or by using ROSETTES to match.

ROSETTES

CAST IRON

CAST IRON




No. 554
2 3/4" Dia.



No. 553
3 3/4" x 2 1/4" Oval

PRESSED STEEL

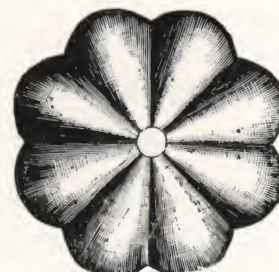

1", 1 1/4", 1 1/2",
2" or 3" Dia.

FORGED AND PRESSED ORNAMENTS

We carry in stock a large variety of Rosettes, Leaves, Cups, Husks, Candle Pans, Shields, Heads, Corners, Flowers, Wreaths, Gallery Mouldings, Crestings, etc.




It is not practicable to show Forged and Pressed Ornaments in catalog form because of the large variety of shapes and sizes. We suggest you include with your inquiries a sketch showing size and type required and we shall be pleased to submit details or samples of ornaments available for your needs.

APPLIED DESIGNS

All Applied Designs and Rosettes can be furnished in Cast Iron,
Architectural Bronze and Aluminum

For Details of Construction Refer to Page No. 106

ALL APPLIED DESIGNS and Rosettes match in color our Architectural Bronze or Aluminum shapes.

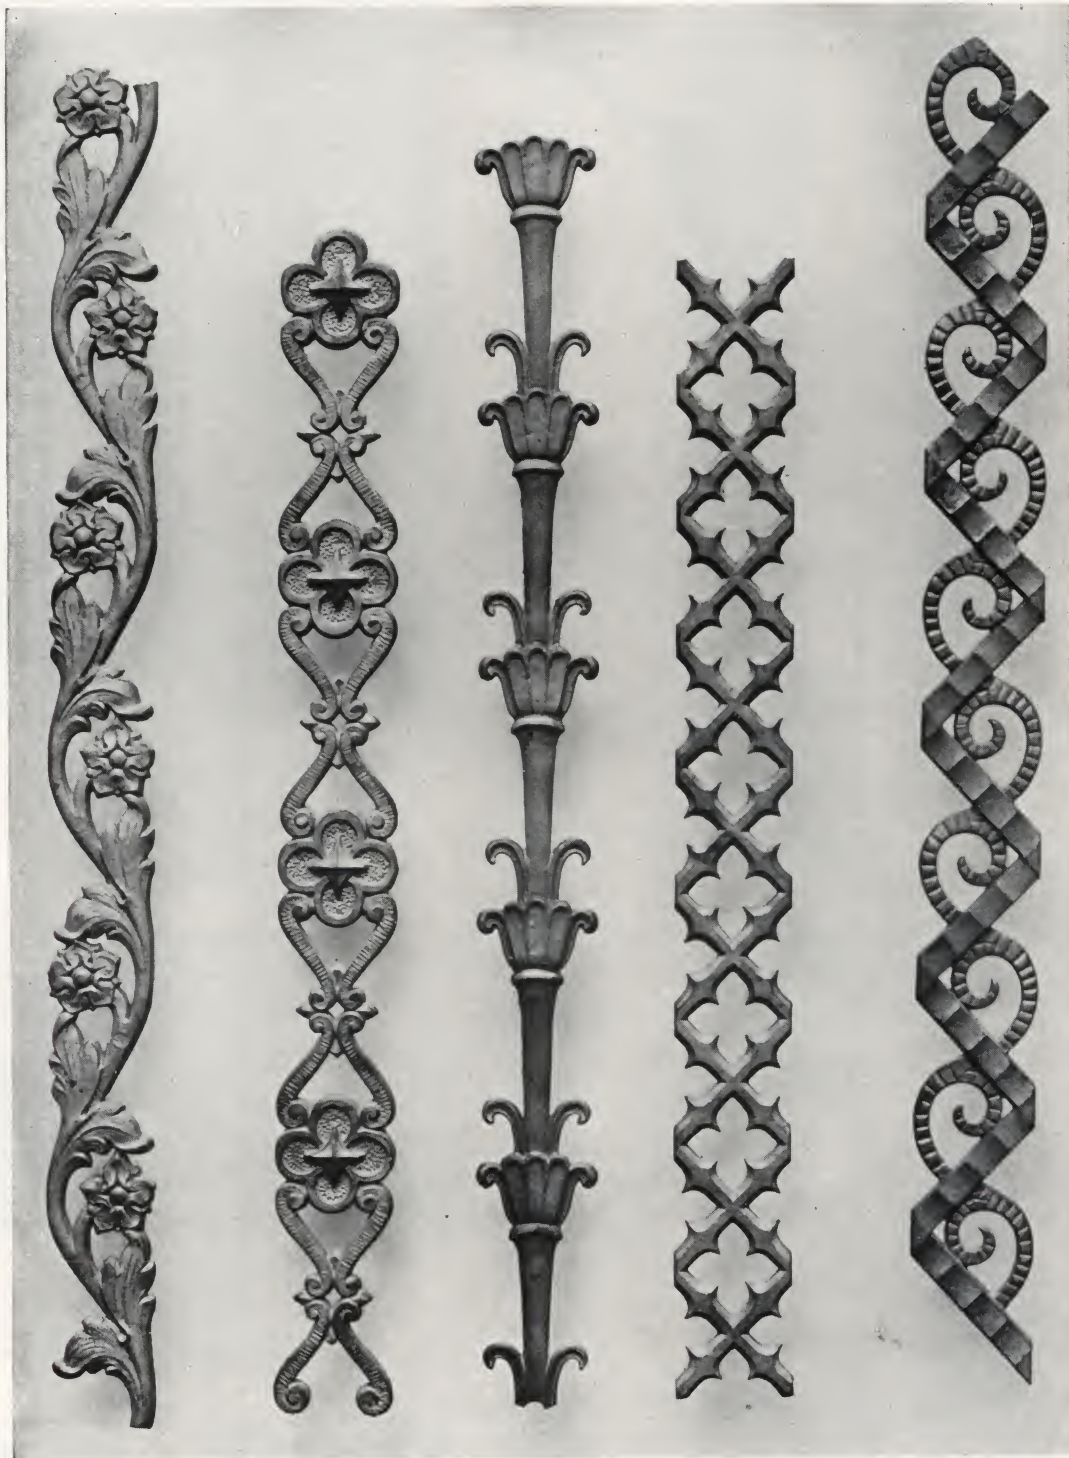

No. 6215

No. 6216

No. 6217

No. 6218

No. 6219

Illustrations are shown ONE-THIRD actual size



Cornice Store Front Bank Screen & Mullion Construction

A great variety of constructions may be produced in this or a similar manner by using steel, bronze and aluminum shapes, ornamented with Applied Designs and Rosettes. Page Nos. 104, 105 and 107.

The variety of patterns of Applied Designs are shown merely for the purpose of illustrating their appearance, not as a suggestion that they should be used in the combination as shown here.

The beauty of the design may be greatly enhanced by combining steel, bronze and aluminum shapes.

For various mullion and corner constructions, see details on Page Nos. 60 and 74.

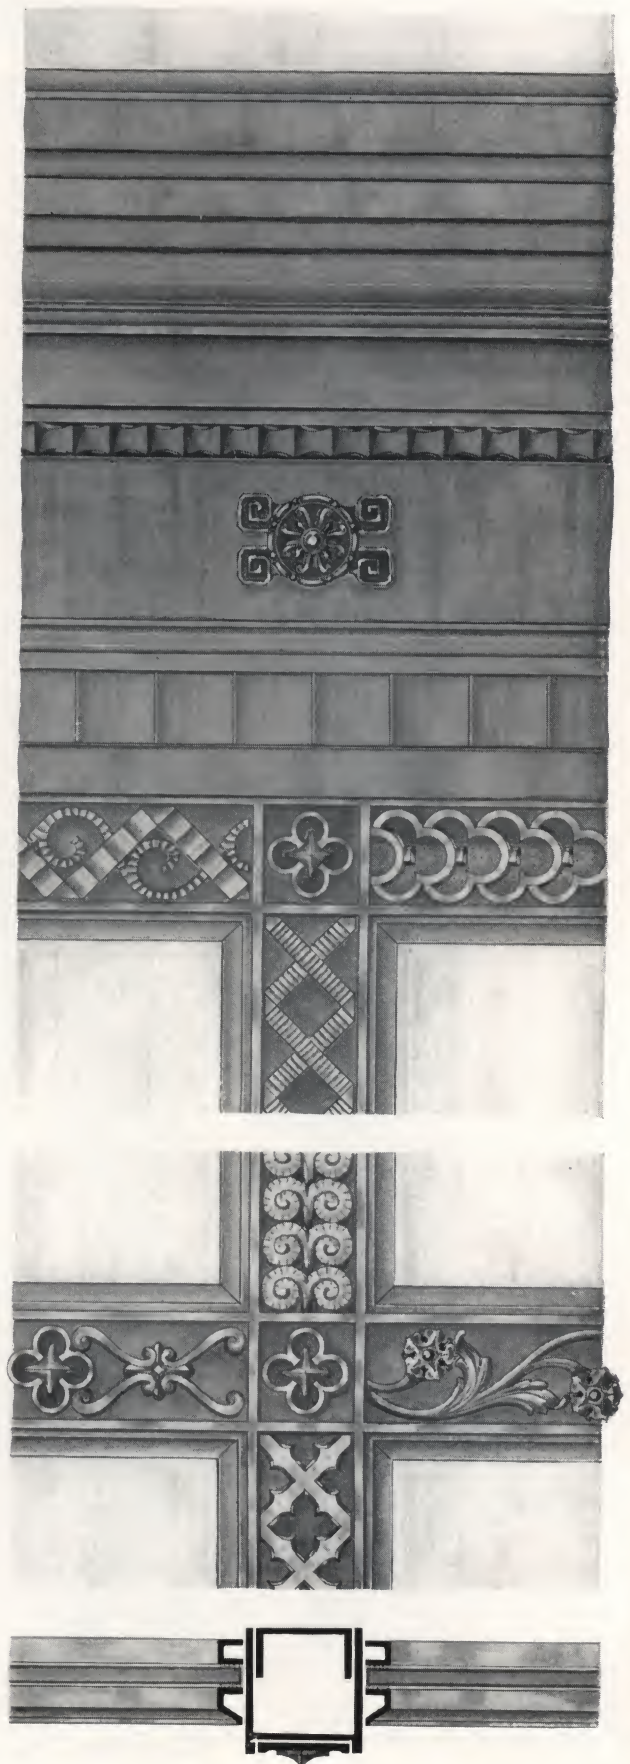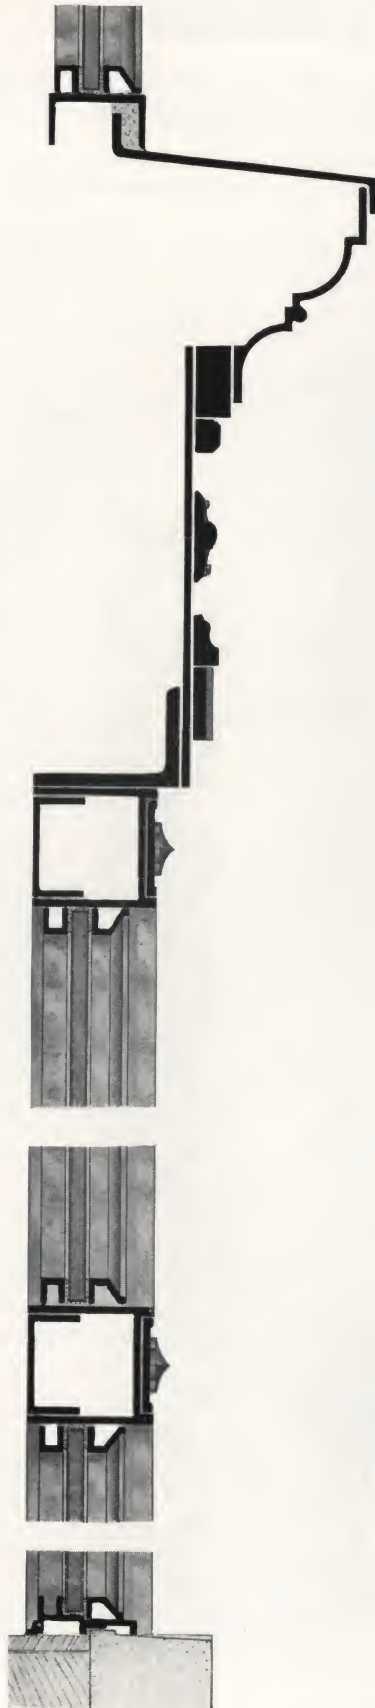


APPLIED DESIGNS

All Applied Designs and Rosettes can be furnished in Cast Iron,
Architectural Bronze and Aluminum

For Details of Construction Refer to Page Nos. 60 and 74

ALL APPLIED DESIGNS and Rosettes match in color our Architectural Bronze or Aluminum shapes.

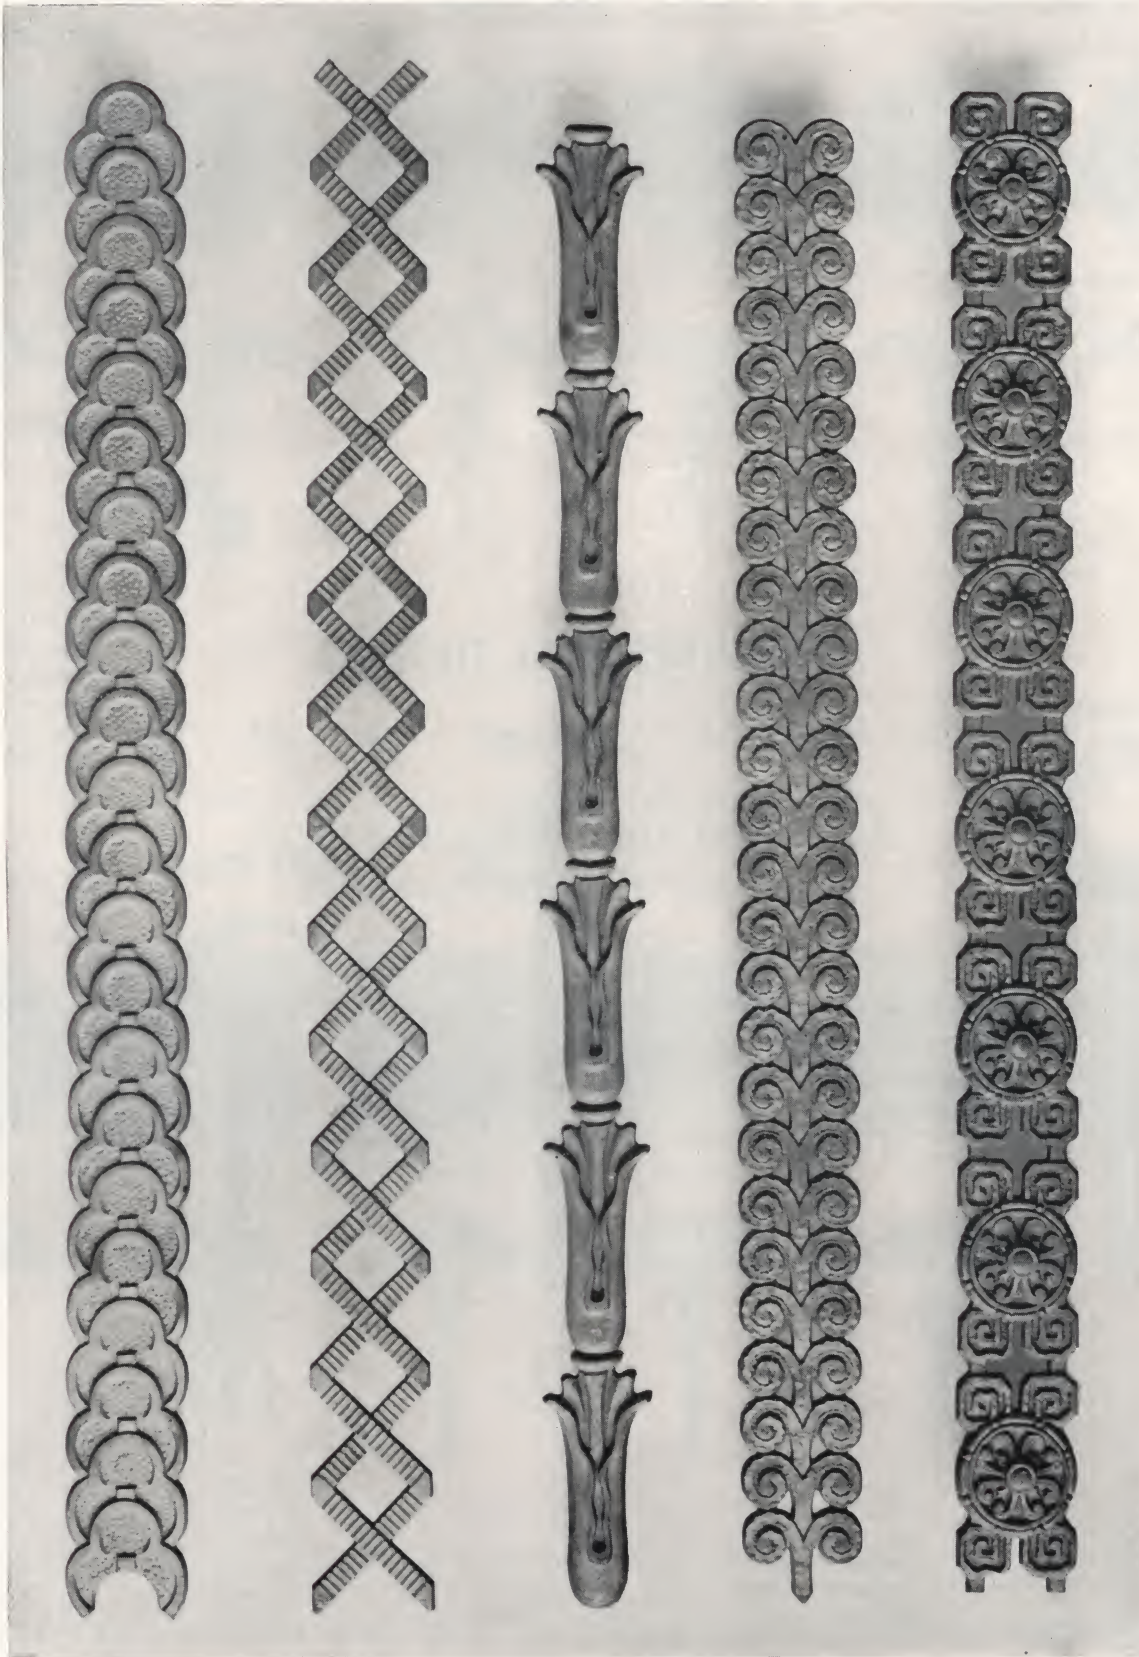

No. 6210

No. 6211

No. 6212

No. 6213

No. 6214

Illustrations are shown ONE-THIRD actual size


ORNAMENTAL BALLS (with Drilled Holes)

ROUND BALLS



No.	Size
00000	—1½" dia.
0000	—1⅜" dia.
000	—1¼" dia.
00	—1⅛" dia.
0	—1" dia.
1	—7⁄8" dia.
2	—¾" dia.
3	—⅝" dia.
4	—½" dia.
5	—⅜" dia.
41	—⅝" dia.
42	—¼" dia.

OVAL BALLS

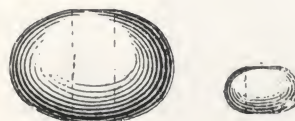

No.	Size
111	—1" x ⅝"
110	—7⁄8" x 9⁄16"
109	—¾" x 7⁄16"
108	—⅝" x 7⁄16"
107	—½" x 5⁄16"
106	—⅜" x ¼"

OVAL BALLS WITH SHOULDER



No.	Size
70	—1" x ⅝"
71	—¾" x ½"


HALF ROUND BALLS



No.	Size
26	—1"
27	—7⁄8"
28	—¾"
13	—⅝"
14	—9⁄16"
15	—½"
16	—7⁄16"

ORNAMENTAL RIVETS

ROUND

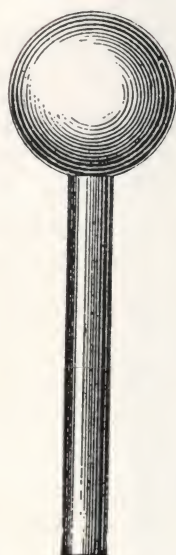


No.	Size
00000	—1½" dia.
0000	—1⅜" dia.
000	—1¼" dia.
00	—1⅛" dia.
0	—1" dia.
1	—7⁄8" dia.
2	—¾" dia.
3	—⅝" dia.
4	—½" dia.
5	—⅜" dia.
41	—⅝" dia.
42	—¼" dia.

OVAL



No.	Size
111	—1" x ⅝"
110	—7⁄8" x 9⁄16"
109	—¾" x 7⁄16"
108	—⅝" x 7⁄16"
107	—½" x 5⁄16"
106	—⅜" x ¼"

PYRAMID

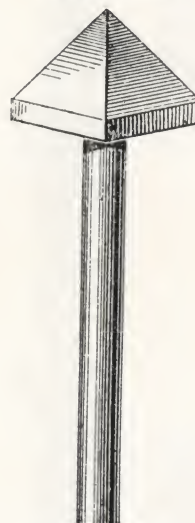

No.	Size
18	—1"
19	—¾"
20	—⅝"
21	—½"

HALF ROUND



No.	Size
26	—1"
27	—7⁄8"
28	—¾"
13	—⅝"
15	—½"
16	—7⁄16"


CONE



No.	Size
29	—1"
30	—7⁄8"
10	—9⁄16"

FORGED WROUGHT IRON ORNAMENTAL NAILS

Illustrations Show Top and Side View

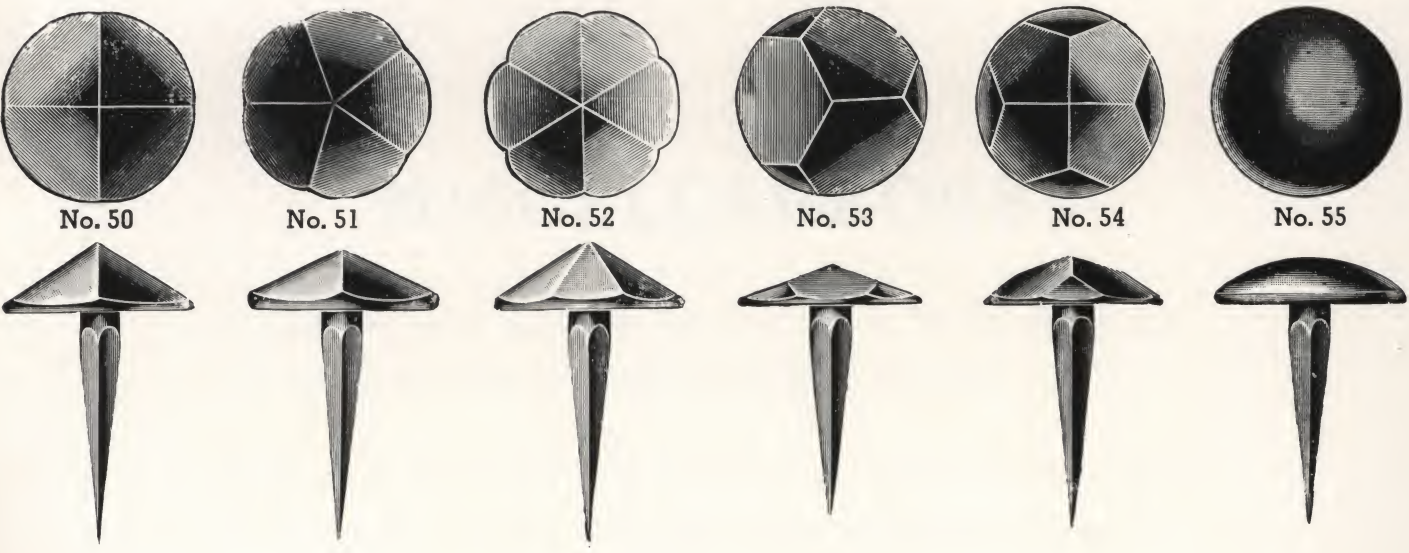


All Numbers are Carried in Stock in Sizes:

$\frac{3}{8}$ " $\frac{1}{2}$ " $\frac{5}{8}$ " $\frac{3}{4}$ " $\frac{7}{8}$ " 1" $1\frac{1}{8}$ " $1\frac{3}{16}$ "

The length of the point, depending on size of the head, ranges from $\frac{3}{4}$ " to $1\frac{3}{8}$ "

ILLUSTRATIONS ARE NOT ACTUAL SIZE

When ordering please state number and size wanted

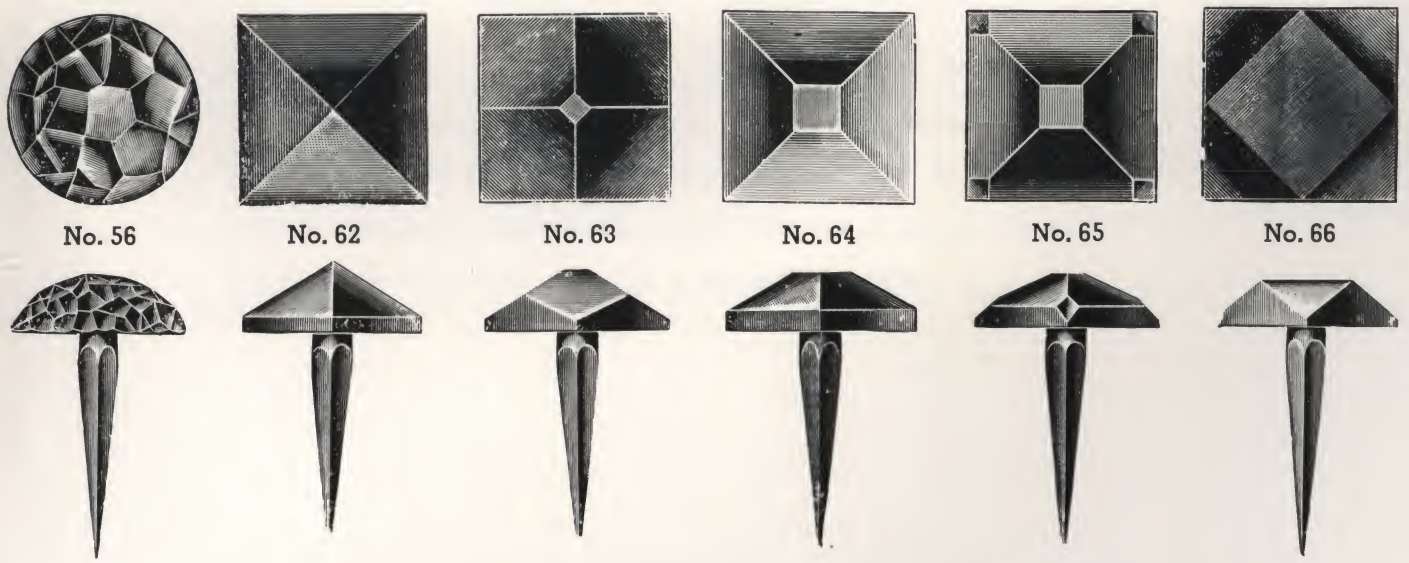

FORGED WROUGHT IRON NAILS are furnished with natural hand-hammered finish. They may be used advantageously for studding Church Doors, Wooden Chests, Furniture, floors, trim, hinge bands and other hardware.

FORGED WROUGHT IRON NAILS are also used for other decorative purposes such as forming rosettes in corners or panels, for fancy rivets on lighting fixtures, mirrors, tables, chairs, fireplaces, display fixtures, etc.

MEMORANDUM

SUPPLEMENTAL DATA AND ILLUSTRATIONS MAY BE PASTED ON THIS PAGE

MISCELLANEOUS

THE following pages list that part of the JULIUS BLUM line which we cannot classify in separate sections.


We wish to emphasize the fact that we are always endeavoring to revise our designs and add to our materials to meet the requirements of changing conditions and forms of construction.

It is well to bear this in mind because due to the time involved in preparing, printing and distributing this catalog, it is quite likely that additions or revisions will have been made before it reaches your hands.

The Julius Blum & Co., Inc. organization has been trained to cope with your problems. We solicit your inquiries for any products allied to the metal working trades. It has been our policy to supply information as to the availability or source of supply for items we are not prepared to offer.

EXTRA HEAVY PLAIN STEEL BALL BEARING BUTTS

(Blank—without screw holes)

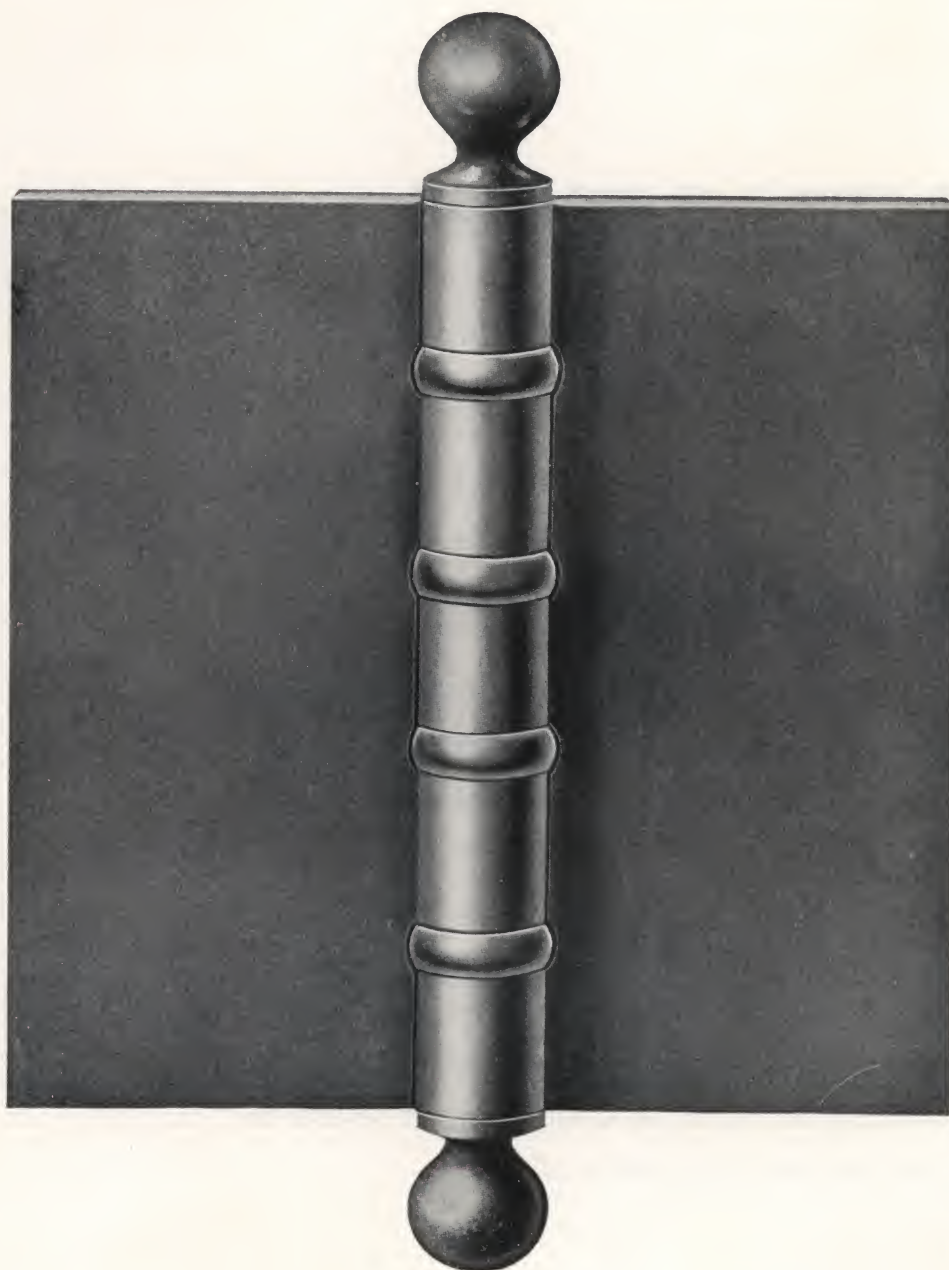

Each Butt equipped with four Bronze ball bearing washers, which prevent the Butts from wearing at the joints and insure that doors will operate easily and without noise.

Carried in stock blank—without screw holes in sizes as follows:

EXTRA HEAVY


8" x 8"
6" x 6"
5" x 5"
4½" x 4½"
4" x 4"

MEDIUM

6" x 6"
6" x 5"

Wrought Steel Loose Pin Butts

With Ball Tips

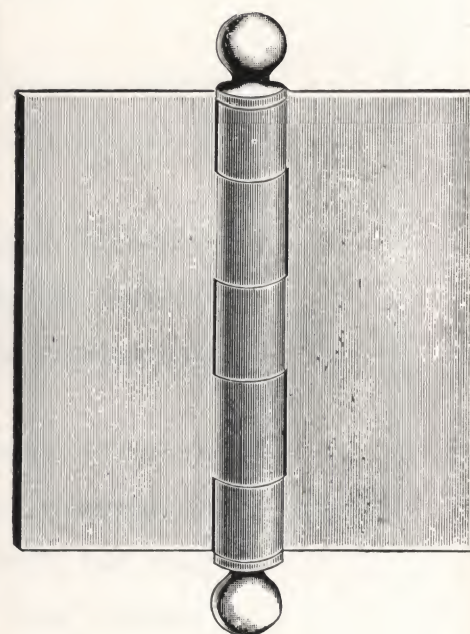

Carried in stock blank—without screw holes in sizes as follows:

2" x 2"
2½" x 2½"
3" x 3"
3½" x 3½"
4" x 4"



WROUGHT STEEL FLUSH BOLTS

Carried in stock in lengths of 6" and 9".

Bolt has 1" throw, is ⅜" square and has 1⅜" lip extension, Front plate 1" wide.

HEAVY DUTY LOCKS



With Latch Only

1 $\frac{1}{8}$ " Backset, overall depth 1 $\frac{3}{8}$ "

1 $\frac{9}{16}$ " Backset, overall depth 2 $\frac{9}{16}$ "



With Latch and Dead Bolt

TYPE "Q" LOCK

(Not Illustrated)

With dead bolt only
(no latch)

1 $\frac{1}{2}$ " Backset, overall depth 2 $\frac{1}{2}$ "

1 $\frac{1}{8}$ " Backset, overall depth 1 $\frac{1}{8}$ "

Threaded on both sides for standard cylinder.

Operated by Thumb Knob on inside.

These locks are hand made, wrought brass construction throughout, no castings being used.

CYLINDERS

1" or 1 $\frac{1}{4}$ " long — Standard threads

Each Cylinder furnished with 3 Keys

REVERSIBLE FOR RIGHT AND LEFT HAND DOORS

Brass construction. Case threaded both sides for standard cylinder.

Locks with dead bolt furnished with thumb knob to operate on inside.

These locks are of sturdy construction especially suited for use on Vestibule Doors, Gates, Steel Partition Doors, Window Guards, etc.

LEVER HANDLES AND KNOBS



POLISHED BRONZE and DULL BLACK malleable iron



One Set consists of:


1 Lever, 1 Knob, 1 Swivel Spindle and 2 Escutcheons

Also sold separately, and in sets of 2 Levers or 2 Knobs

PLASTICS

We carry in stock, for immediate delivery, a multiplicity of Plastic items which are partially illustrated and described below.

TENITE II

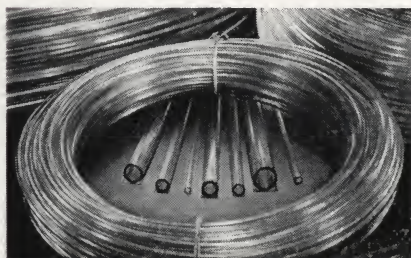

POLYSTYRENE

SARAN


Plastic Tubing

Available in a complete line of standard wall and heavy wall thicknesses from $\frac{3}{16}$ " O.D. up to and including 2" O.D. Special sizes and shapes in Round, Square, Oval, and Rectangular tubing may be obtained in Transparent, Translucent and Opaque Colors. Standard and special-size tubings manufactured to order in various types of plastic formulas.




Hollow and Solid Rod

Used successfully for automatic screw machine parts, spacers, washers, unions, couplings, etc. Available in standard Hexagonal, Round, and Knurled in large range of sizes.

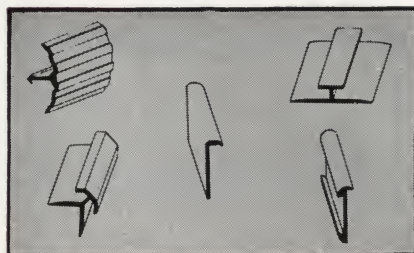

Functional Shapes

Suitable for use with rigid and flexible wall and floor-covering materials, such as, Plywood, Insulating Board, Linoleum, Glass, etc.

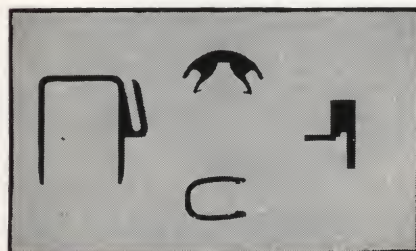

Industrial Shapes

These Shapes (four shown at left) offer permanency and durability of color in a choice of colors. Industrial Shapes are manufactured to special order in accordance with customer's specifications.

Complete size and price schedules with descriptive literature will be furnished upon request

MACHINERY

We are recognized distributors for many nationally known manufacturers of all types of machinery and equipment for metal fabrication.

It has been our practice to present to the trade many tools which have helped to lower labor costs and simplify methods of manufacture.

We will gladly make recommendations on equipment for any special operations.

The following is a partial list of machinery and tools which we handle, many of which are carried in stock.

ANGLE SHEARS <i>and</i> NOTCHERS	HACK SAWS
BAND SAWS	HAMMERS
BAR SHEARS	HOISTS
BENDING MACHINES	PUNCHING MACHINES
BRAKES	PUNCHING <i>and</i> SHEARING MACHINES
CRANES	SAW BLADES
DRILLS	SHEARING MACHINES
ELECTRIC WELDERS	SPOT WELDERS
FORGES	SQUARING SHEARS
GRINDERS	THREADERS, BOLT <i>and</i> PIPE
HAND PUNCHES <i>or</i> SHEARS	PUNCHES, DIES, <i>etc.</i>

COPY OF OUR CATALOG "MACHINERY" WILL BE MAILED UPON REQUEST

GENUINE SOAPSTONE STICKS

(METAL WORKERS CRAYONS)

HARD CLEAR SELECT WHITE SOAPSTONE

$\frac{1}{4}$ " square

$\frac{1}{4}$ " round

$\frac{1}{2}$ " x $\frac{3}{16}$ " flat

SOLD BY THE BOX (144 STICKS) OR IN $\frac{1}{2}$ CASE AND CASE LOTS — 24 BOXES IN CASE

